


NOTE: Wire dimming conductors as Class 1



This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. proper grounding is required for safety.


Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. la mise à terre électrique est obligatoire pour la sécurité.

1 SINGLE FIXTURE

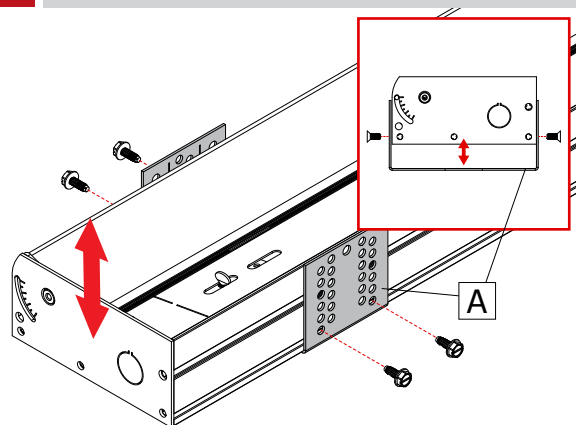


If a mounting brackets (A) is needed adjust it on the fixture depending of the depth of the cove. The depth is adjustable from 1 13/16" to 3 5/16" in 1/8" increments.

2

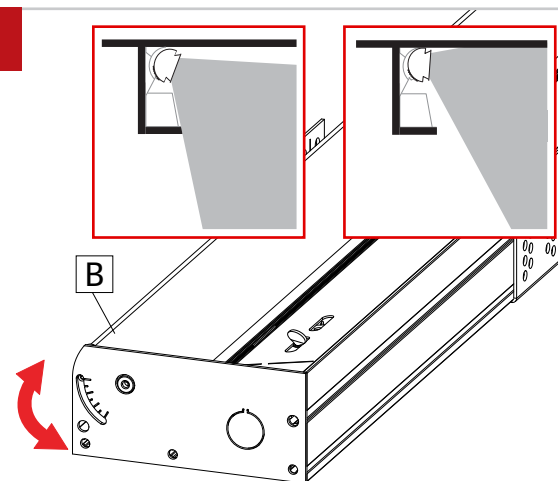


Adjust the optic (B) to the desire angle (between 0 and 60 degrees) by rotating it.

3

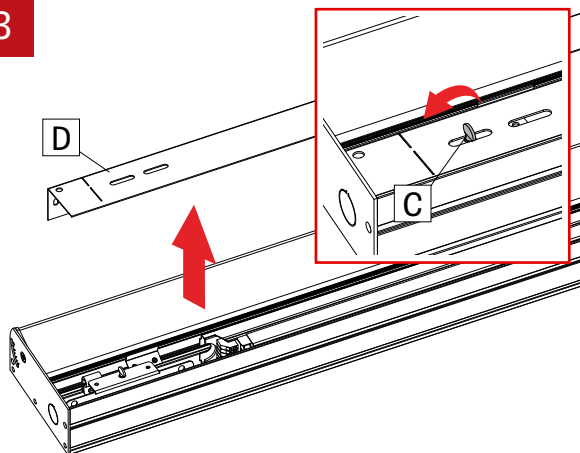


Unlock all the thumbscrews (C). Remove the white reflector (D).

4

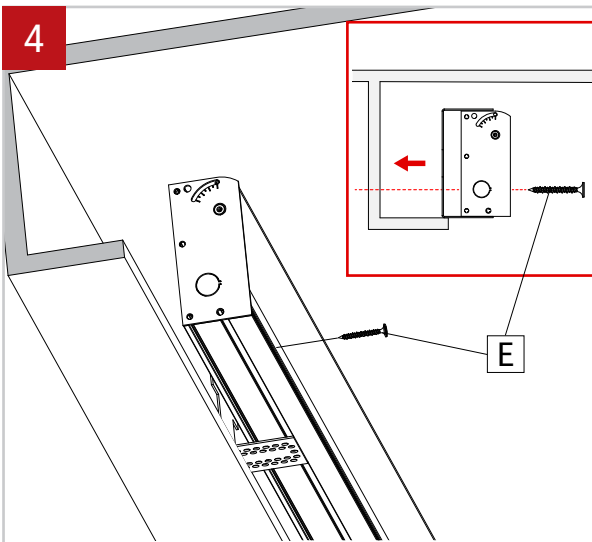


Screw the fixture to the wall with the drywall screw (by others) (E).

5

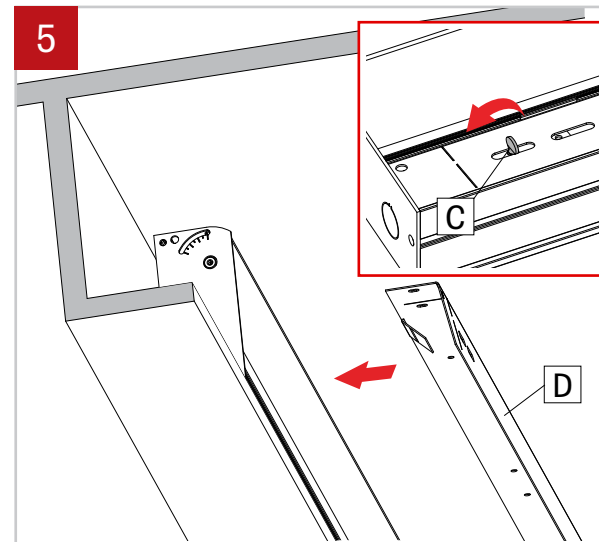

Put back in place the white reflector (D) and relock it with the thumbscrews (C).

6

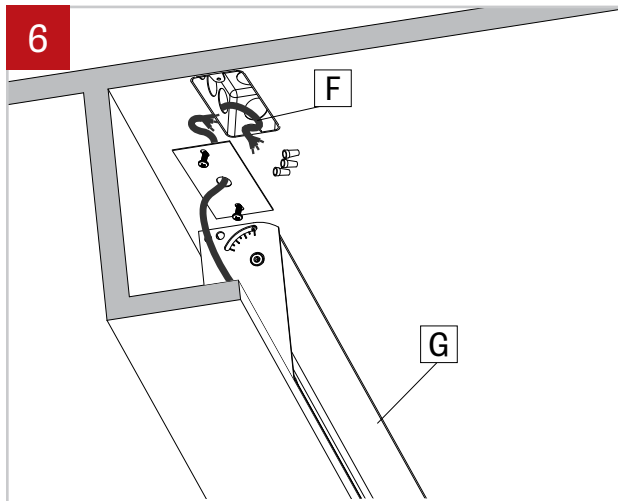


Make electrical connection between main power cable (F) and the fixture (G) inside the junction box.

Warning : Power must come from Single branch circuit.


7

CONTINUOUS SYSTEM LINEAR

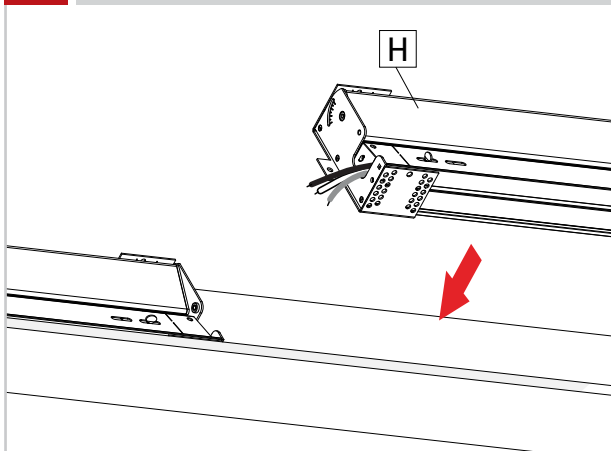


For a continuous system, apply step 1 to 6 for the first fixture. Then, place the second fixture (H) in the cove.

8

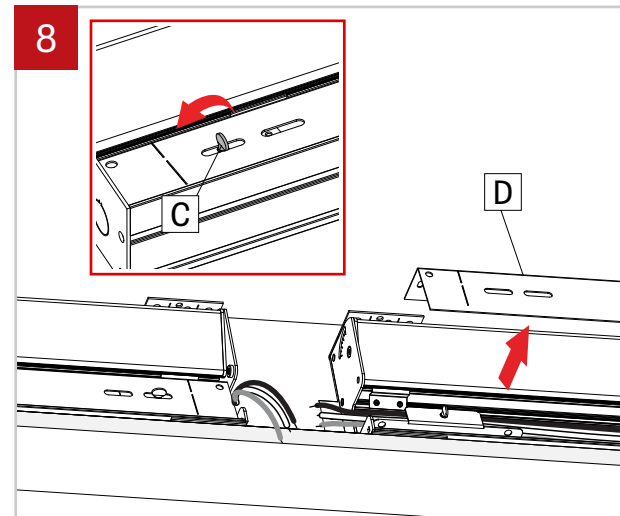


By unlocking the thumbscrews (C), remove the white reflectors (D) from all the fixtures in the run.

9

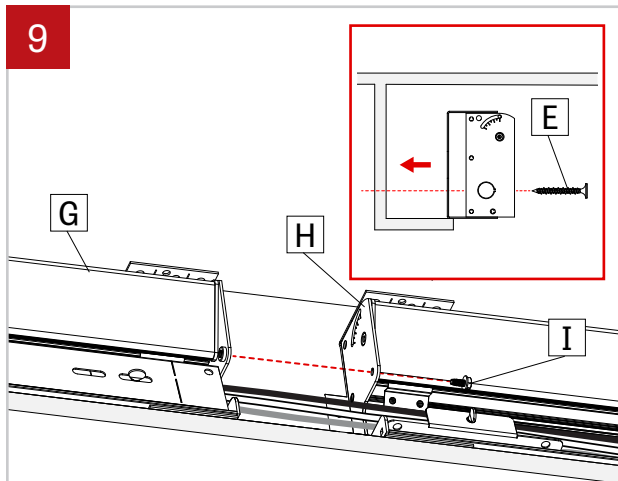


Align the fixtures (G) and (H) and attach them by fastening screw on the joiner (I). Then, screw the second fixture to the wall with the drywall screw (E).

10

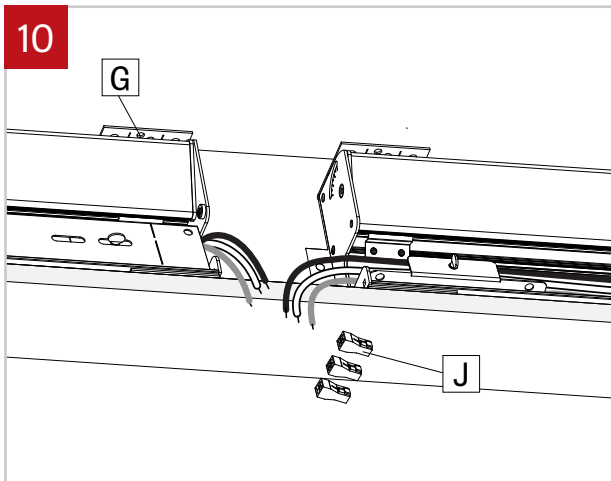

Connect wires between joining fixtures using quick connectors (J). Push the connected wires inside the first fixture (G).

11

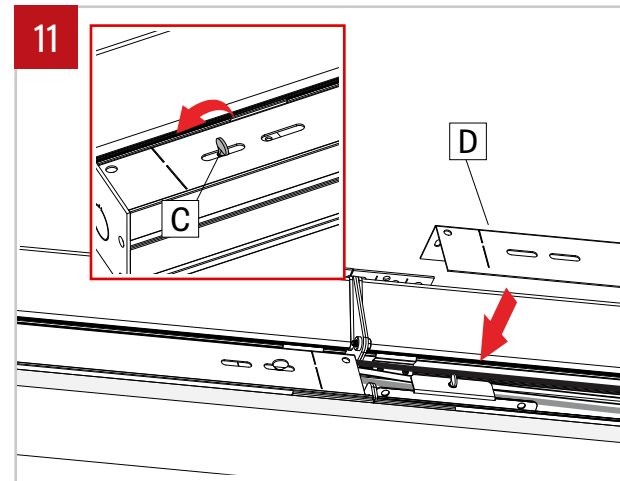

Put back in place the white reflectors (D) and secure them by locking back in place the thumbscrews (C). **Make sure all fixtures' optic are in the same angle and adjust them if necessary.** Repeat steps 9 to 11 for all the fixtures in the run.