


NOTE: Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

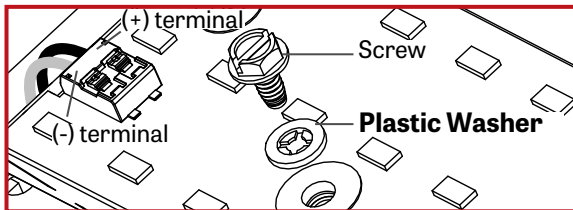


1 SINGLE FIXTURE

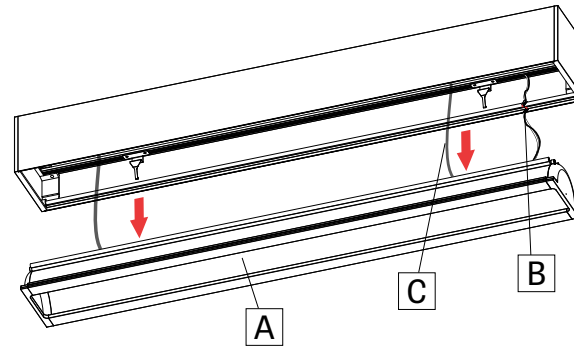


Remove reflector (A) from the extrusion. Disconnect quick connectors (B) and remove security cables (C) in order to remove the reflector (A). Place it in a safe place.

2

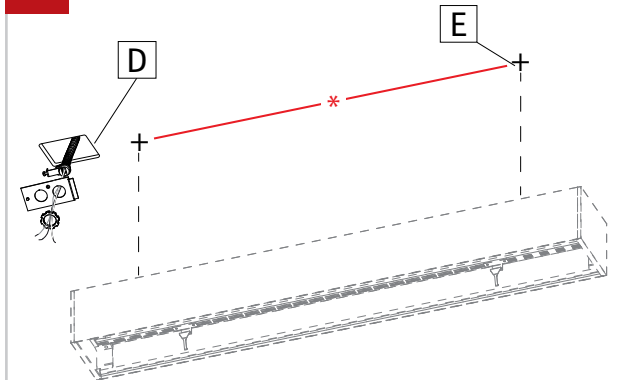


Locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions supplied in client drawings.

3

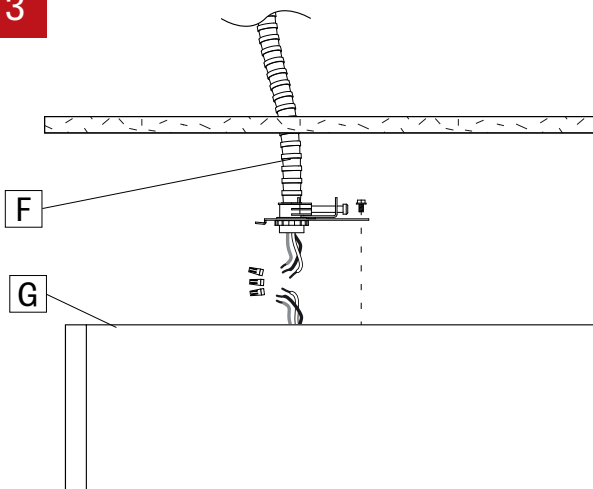


Make electrical connections between main power (F) and fixture (G). **Number of wires may vary.**

4

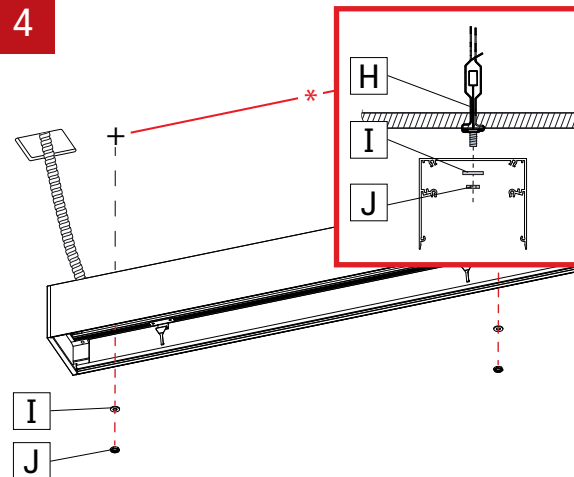


Fasten fixture to caddy clips (H) using washers (I) and nuts (J).

5

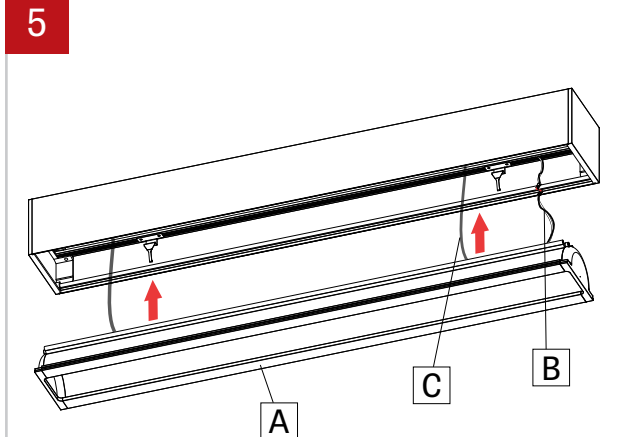


Reinstall security cables (C) and reconnect quick connectors (B). Reinstall reflector (A) inside the fixture.

6 CONTINUOUS SYSTEM

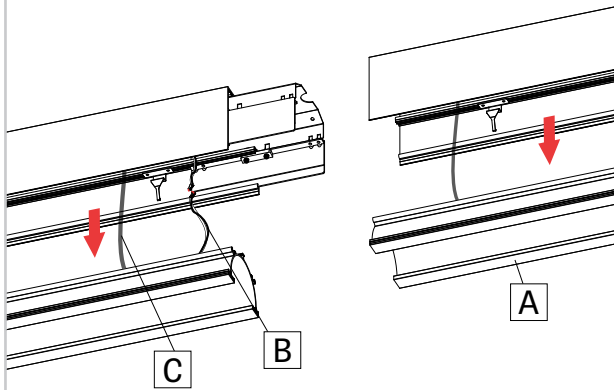


Remove reflector (A) from the extrusion. Disconnect quick connectors (B) and remove security cables (C) in order to remove the reflector (A). Place it in a safe place.

7

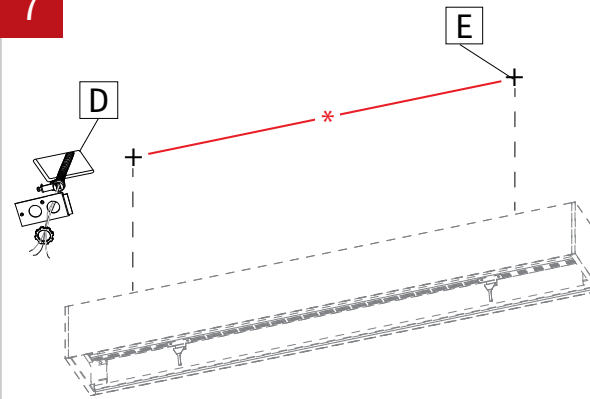


For a continuous system, locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions [*] supplied in client drawings.

8

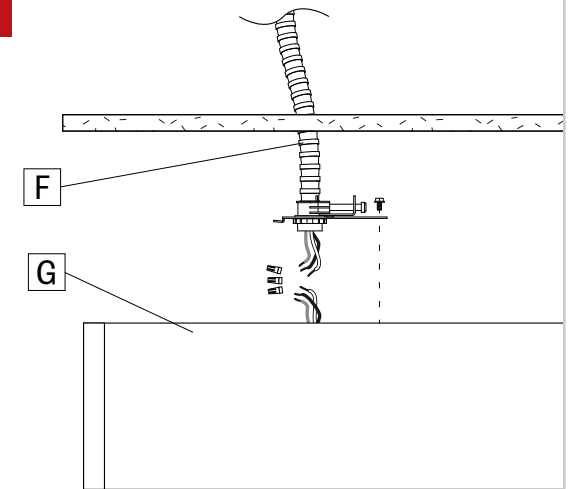


Make electrical connections between main power (F) and fixture (G). **Number of wires may vary.**

9

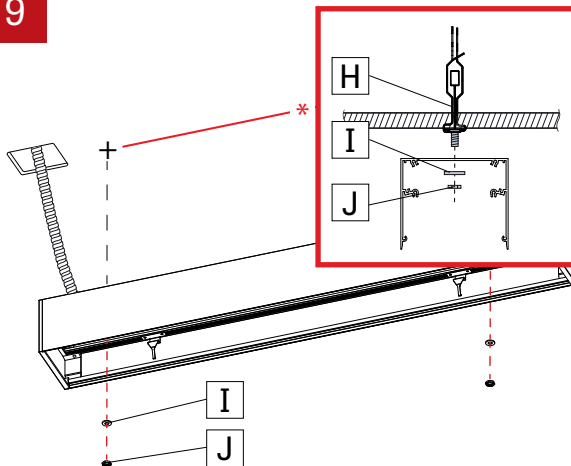


Fasten fixture to caddy clips (H) using washers (I) and nuts (J).

10

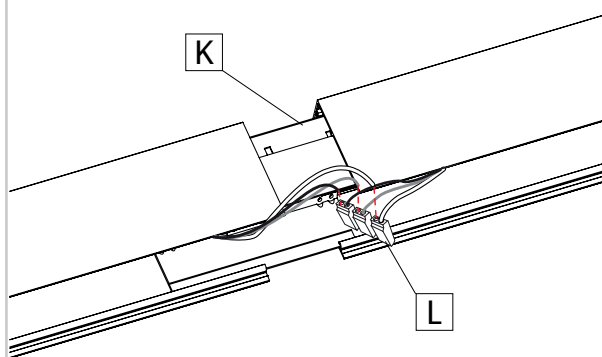

Align both fixtures using aligners (K) and connect wires between fixtures using quick connectors (L). **Number of wires may vary.**

11

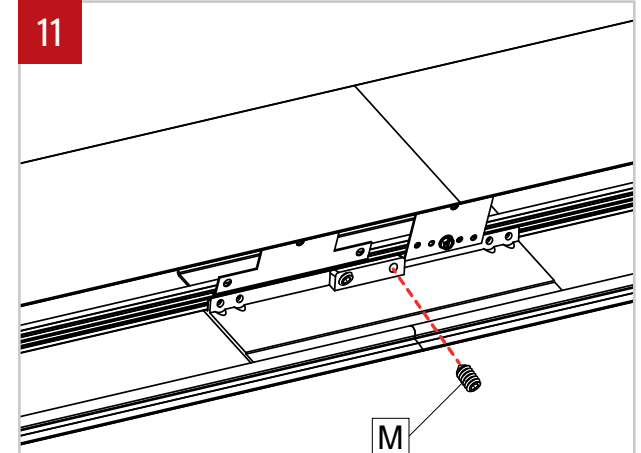

Join fixtures together and Secure them together with supplied screws (M). Then tighten all washers and nuts on threaded studs to secure the fixtures.

