


NOTE: Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

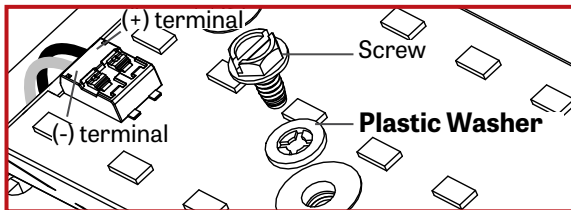


3

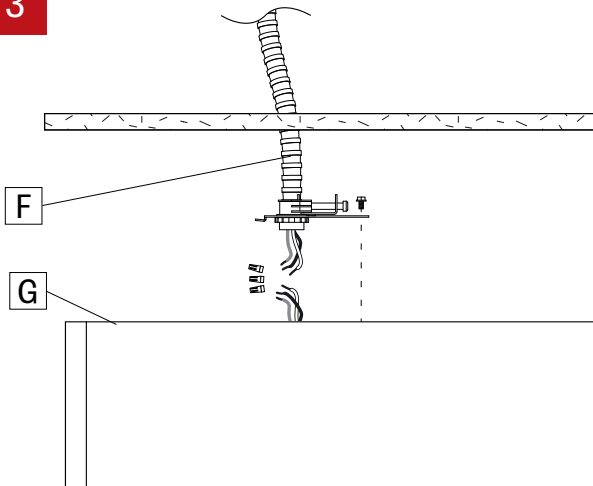

Make electrical connections between main power (F) and fixture (G). **Number of wires may vary.**


1

SINGLE FIXTURE

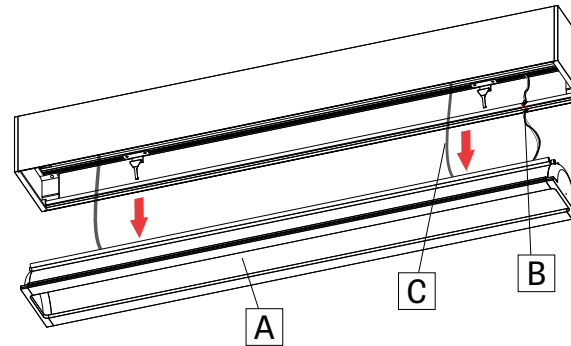


Remove reflector (A) from the extrusion. Disconnect quick connectors (B) and remove security cables (C) in order to remove the reflector (A). Place it in a safe place.

2

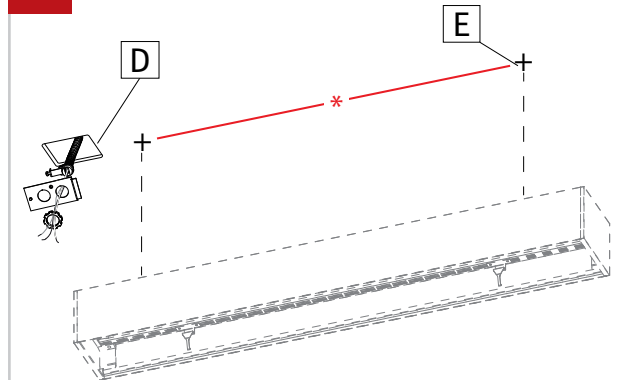


Locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions supplied in client drawings.

4

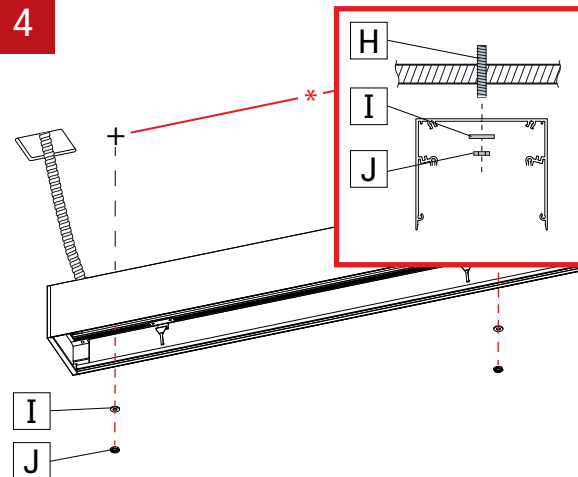


Fasten fixture to threaded stud (H) using washer (I) and nuts (J). **(If there's no threaded stud present, the fixture can be screwed directly onto the ceiling).**


5

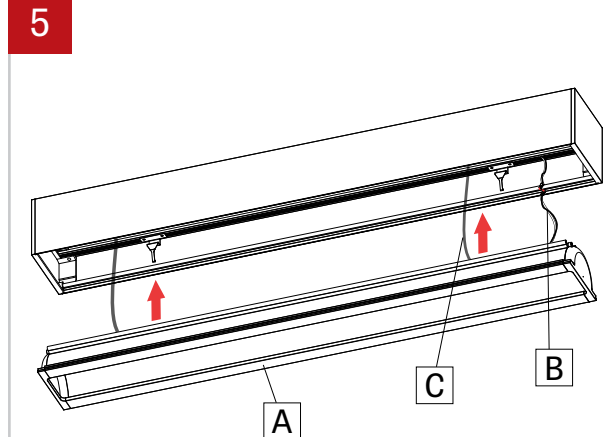


Reinstall security cables (C) and reconnect quick connectors (B). Reinstall reflector (A) inside the fixture.

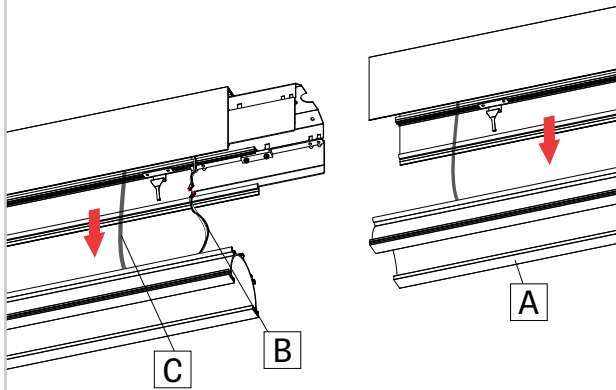6 CONTINUOUS SYSTEM


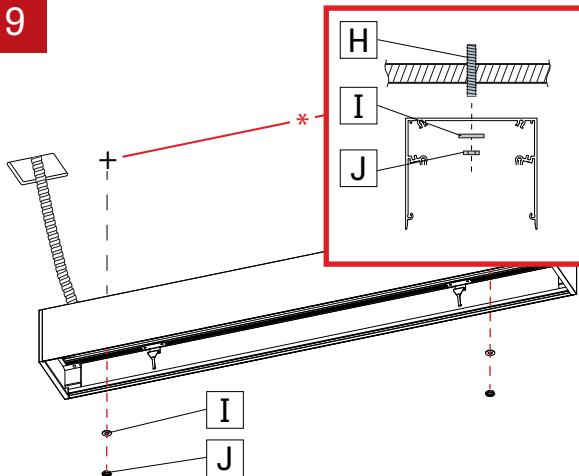
Remove reflector (A) from the extrusion. Disconnect quick connectors (B) and remove security cables (C) in order to remove the reflector (A). Place it in a safe place.

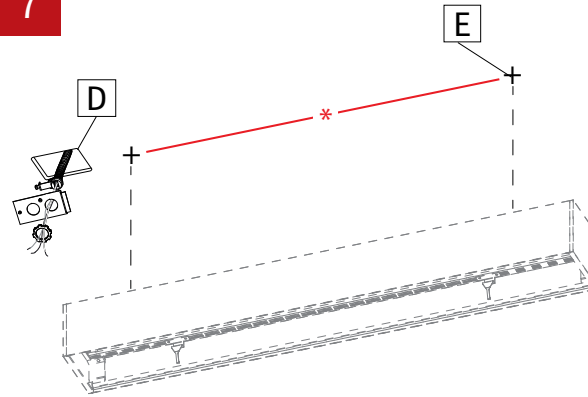7


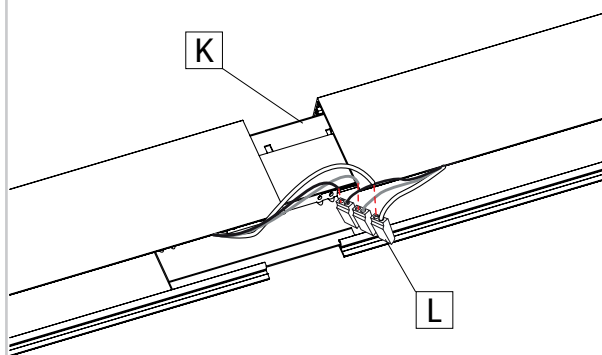
For a continuous system, locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions [*] supplied in client drawings.

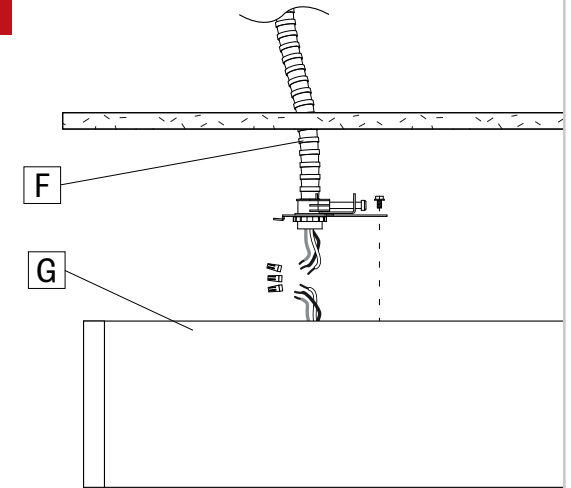8


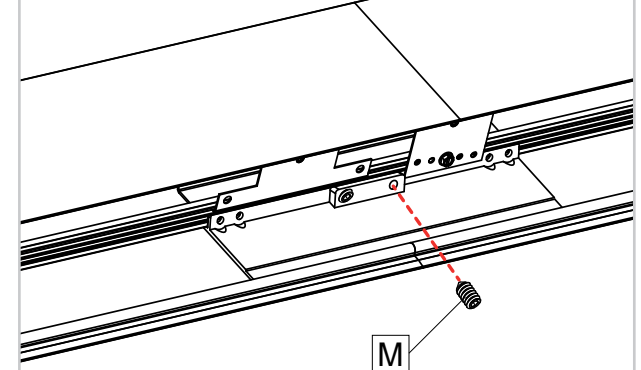
Make electrical connections between main power (F) and fixture (G). **Number of wires may vary.**

9


Fasten the first fixture to threaded stud (H) using washers (I) and nuts (J).


10


Align both fixtures using aligners (K) and connect wires between joining fixtures using quick connectors (L). **Number of wires may vary.**

11


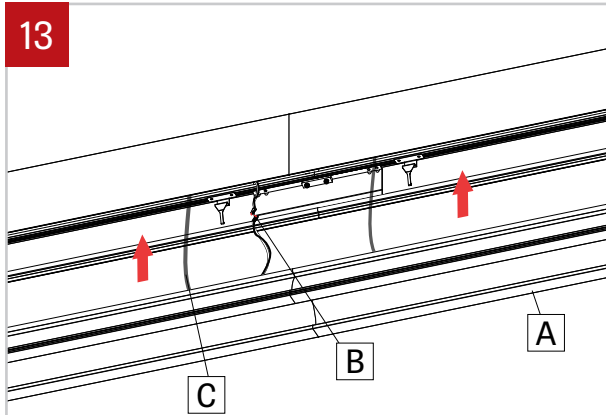
Join fixtures together and Secure them together with supplied screws (M) . Then tighten all washers and nuts on threaded studs to secure the fixtures.

12

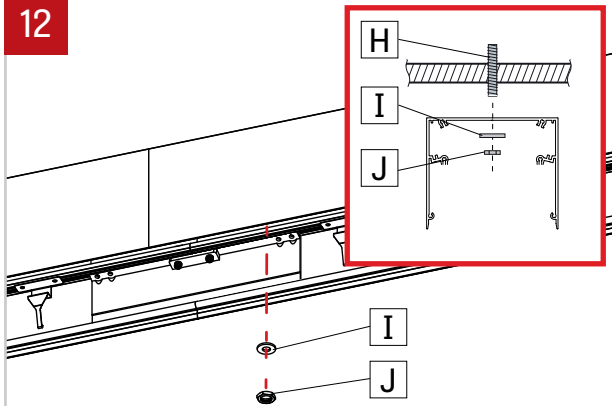

Locate mounting points of the second fixture and install the fixture. Fasten the second fixture to threaded stud (H) using washers (I) and nuts (J) without overtighten. Repeat steps 10 to 12 for all other fixture.

13



Reinstall security cables (C) and reconnect quick connectors (B). Reinstall reflector (A) inside the fixture.