INSTALLATION INSTRUCTIONS

⚠ This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

⚠ Disconnect power before installation or servicing.

⚠ Do not cover the light element lens or heatsink with any materials or adhesive tapes when the fixture is powered.

⚠ Handle the LED cartridge carefully during removal and installation. Tools must not touch the LED chips. Contact may result in damage and LED failure.

⚠ Wire dimming conductors as Class 1.

⚠ A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

⚠ For luminaires specified as recessed, clearance between the sides of the luminaire and parts of the building must be 1/2" minimum; clearance to insulating materials to be 3" minimum, unless luminaire is IC rated.

⚠ For luminaires installed in wet locations, properly seal all mounting and electrical points.

⚠ Warranty claims will not be accepted if incorrect driver or light element is used.

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.

CURVIA SLIM SEAL
PENDANT

Lumenwerx

SINGLE FIXTURE

For electrical connections, please refer to the wiring diagram guide.

For remote driver box installation instructions, please refer to the remote driver installation sheet.

Shown with Curvia Slim Seal 2. Applicable to Curvia Slim Seal 1.

Shown with pattern. Applicable to ring and shapes.


1 INSTALL ALL CANOPIES.

Locate ceiling mounting points according to the provided client drawings.


Slide the slip ring **[A]** and the canopy **[B]** onto the stems **[C]** and leave some space.

Fasten the nipple **[D]** onto the crossbar **[E]** with the washer **[F]** and the nut **[G]**. Screw the stems **[C]** onto the nipple **[D]**.

POWER SIDE

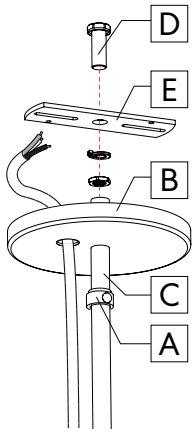


NON-POWER SIDE

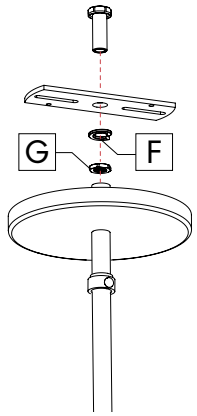

2 INSTALL STEMS ON FIXTURE.

Screw the stems **[C]** onto the nipple **[H]** at the ends of the fixture.

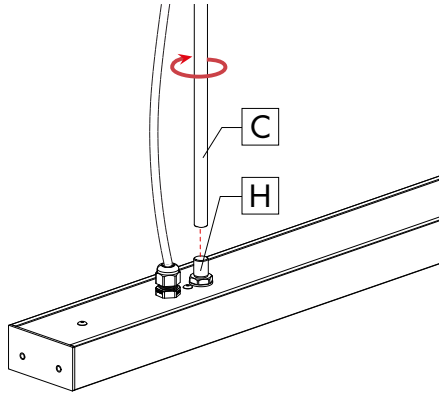


3 INSTALL FIXTURE TO CEILING.


POWER SIDE

Raise the fixture and tighten the crossbar **[E]** with screws (by others) to the junction box **[I]**.

Make wire connections to the main power with wire nuts (by others).

Slide the canopy **[B]** and the slip ring **[A]** up. Tighten the slip ring **[A]** with the screw **[J]**.

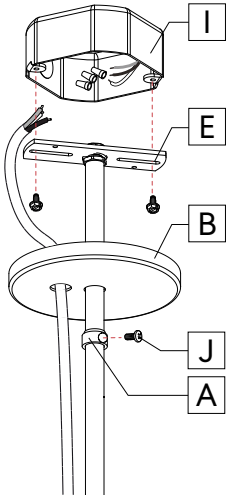





NON-POWER SIDE

Raise the fixture and tighten the crossbar **[E]** with screws (by others) to the junction box **[I]**.

Slide the canopy **[B]** and the slip ring **[A]** up. Tighten the slip ring **[A]** with the screw **[J]**.

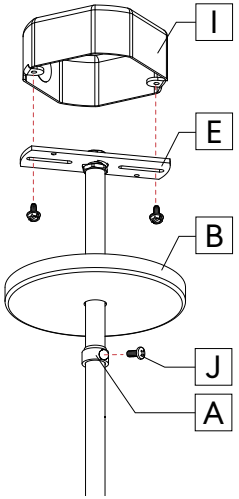



Intertek

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.


CURVIA SLIM SEAL
PENDANT

Lumenwerx

CONTINUOUS RUN

1 REMOVE LENSES.

Remove the lenses **[K]** from the fixtures using the provided lens tool and keep them in a safe place.

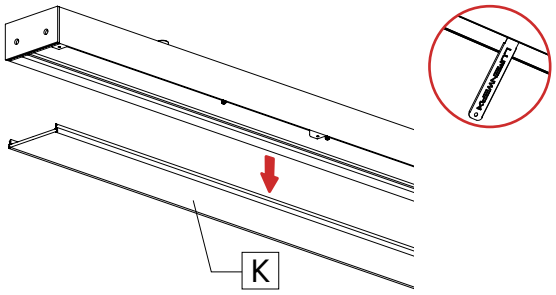


2 REMOVE CARTRIDGES.

Unscrew and remove cartridges **[L]** from the fixtures. Disconnect the electrical connectors.

Note: For IP64, skip to step 3.

IP54 ONLY

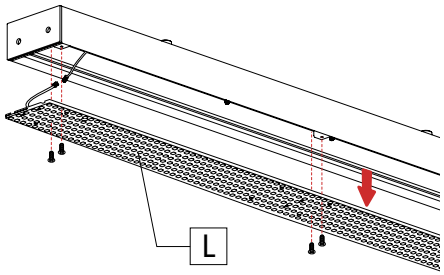


3 FOLLOW STEPS **1 - 3** FROM THE SINGLE FIXTURE INSTRUCTIONS FOR ALL THE FIXTURES IN THE RUN.

4 JOIN FIXTURES.


Unscrew the screws **[M]** from the fixtures.

Align the second fixture **[N]** to the first fixture **[O]**. Attach the two fixtures by fastening screws on the joiners.

IP64

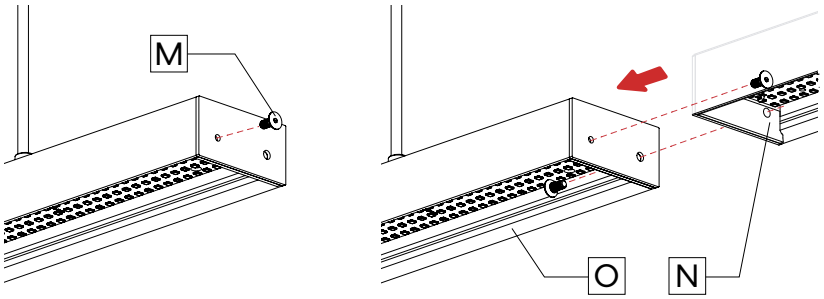

IP54

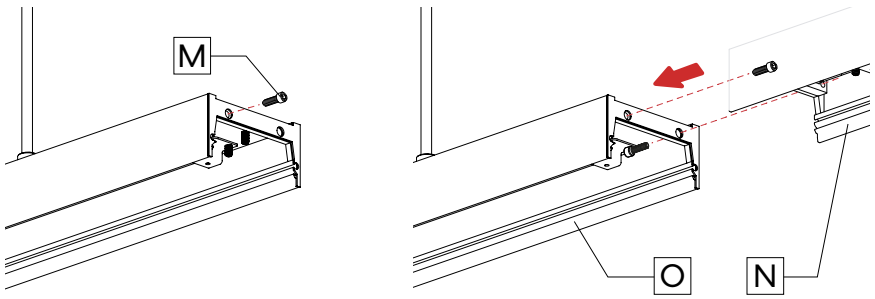

Intertek

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.

CURVIA SLIM SEAL
PENDANT


CONTINUOUS RUN

5 REINSTALL CARTRIDGES.

Reconnect the electrical connectors between the cartridges **[L]** and fixtures. Reinstall the cartridges **[L]** with screws.


Note: For IP64, skip to step 6.


IP54 ONLY

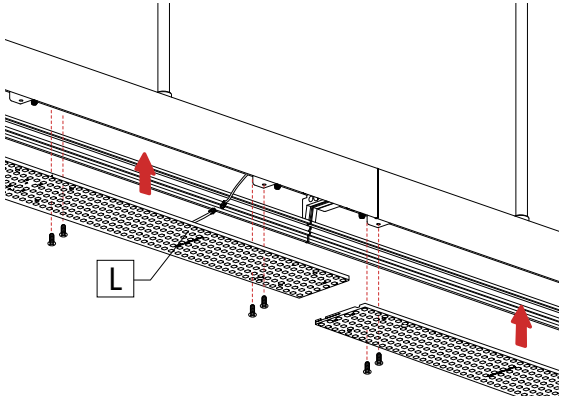

6 REINSTALL LENSES.

Bend the lenses **[K]** slightly and insert one side at a time to compress the end cap gasket **[P]** to create a proper seal.

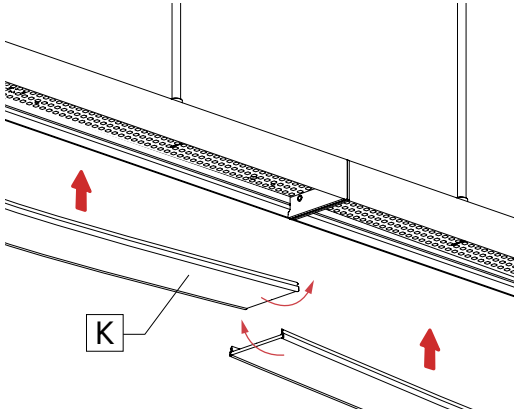



www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.