



# FLAIR


## Pendant - Direct mount

LUMENWERX

 This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.



Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

 Wire dimming conductors as Class 1.

 For electrical connections, follow the wiring diagrams on page [5](#) and [6](#) according to specified drivers in product configuration.


### OVERVIEW

#### Junction box (by others)

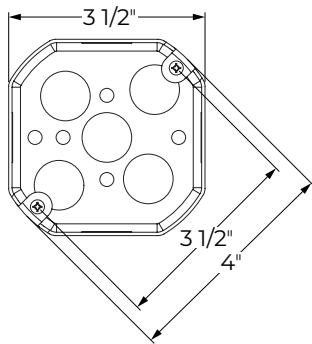


Standard 4" octagonal junction box

#### Power cord

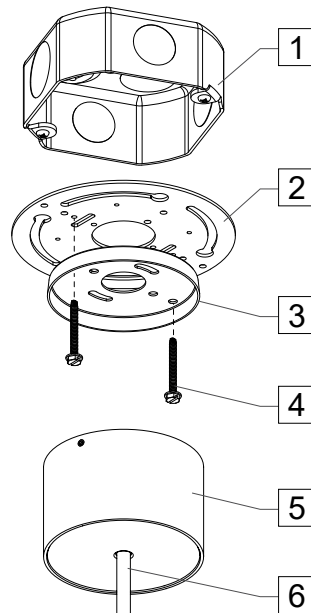

#### Stem

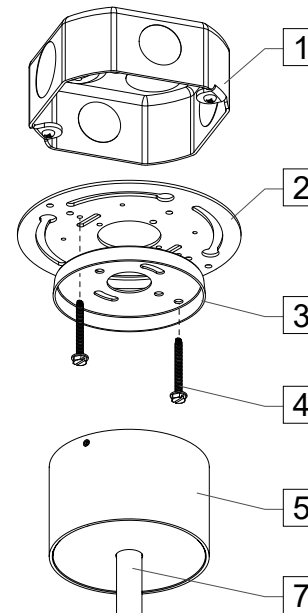



#### Items list


1	Standard J-box (by others)
2	Mounting plate
3	Adapter piece
4	6-32 screw
5	Housing assembly
6	Cable
7	Stem


#### Tools required

- Allen key 5/64
- Philips screwdriver
- Gypsum cutter or milling hand tool

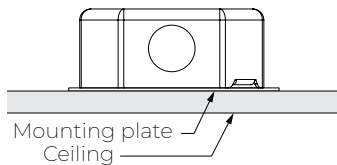

 For remote driver box, please refer to the [remote driver installation sheet](#) for more information.



 Shown with power cord and also applies to stem.

# FLAIR

## Pendant - Direct mount


# LUMENWERX

### POWER CORD - JUNCTION BOX (Install option A - New construction)

#### 1 INSTALL JUNCTION BOX AND MOUNTING PLATE.

Install and reinforce junction box [A] (by others) to ceiling structure.



Mount and turn the mounting plate [B] to place on the junction box. Tighten screws to secure the mounting plate to the junction box.

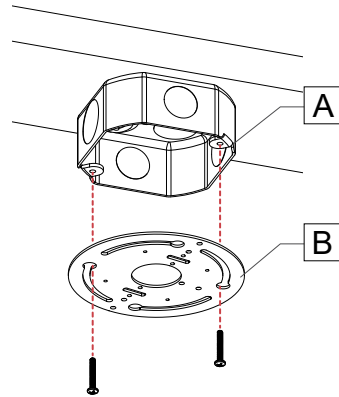

#### 2 PREPARE DRYWALL CEILING.

Install the drywall [C]. Prepare the area where the fixture is going to be installed. Cut hole in the drywall.

Size	A
2"	Ø1 3/4"
3"	Ø2 3/4"

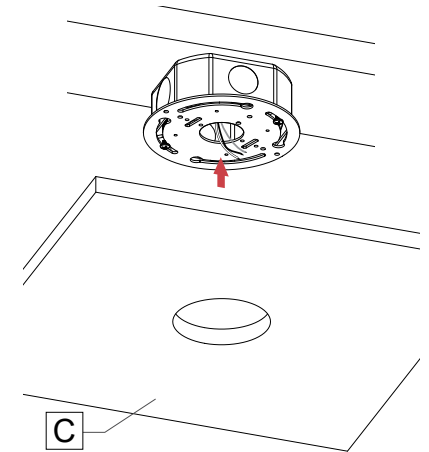


#### 3 INSTALL ADAPTER PIECE TO CEILING.

Unlock set screws [D] from the housing assembly, using the provided allen key.

Pass the main power cable through the adapter piece [E].


Attach the adapter piece [E] to the mounting plate [B] with 2x 6-32 screws [F] provided.

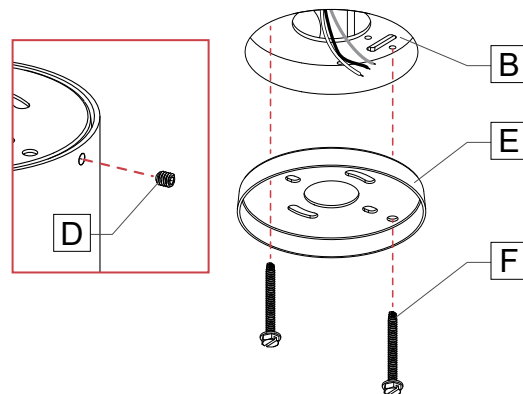

#### 4 MAKE ELECTRICAL CONNECTIONS.

Make electrical connections between the fixture cable [G] and the main power [H] using wire nuts (by others).

**Warning:** A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

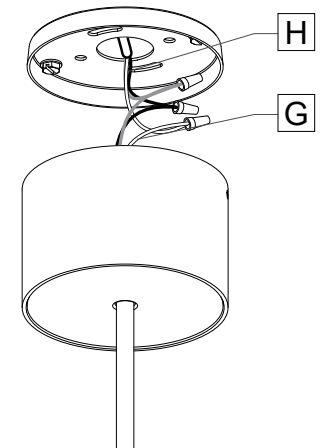



# FLAIR

## Pendant - Direct mount

LUMENWERX

### 5 INSTALL HOUSING ASSEMBLY.

Put the housing assembly [I] back to the adapter piece [E] and lock 2x 8-32 set screws [D].

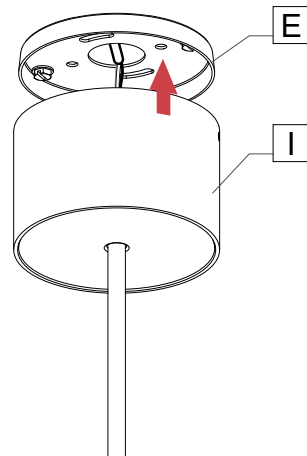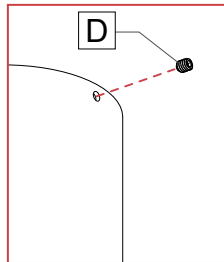

# FLAIR


## Pendant - Direct mount

# LUMENWERX


### POWER CORD - DIRECT FEED (Install option B - Remodel)

#### 1 INSTALL ADAPTER PIECE TO CEILING.


Remove set screws [A] from the housing assembly [B].




Locate where the fixture will be installed. Use the adapter piece [C] as a model to mark 2 mounting points and a 7/8" dia hole.

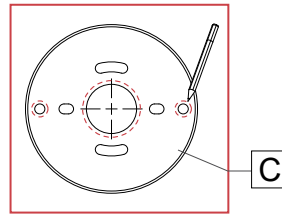

Pierce a  $\text{Ø } 7/8''$  hole and bring the power cable [D] through the hole and connect the power cable to the adapter [E] (by others).




Install screw anchors [F] (by others) where the hole was made and install the adapter piece [C] with screws (by others).

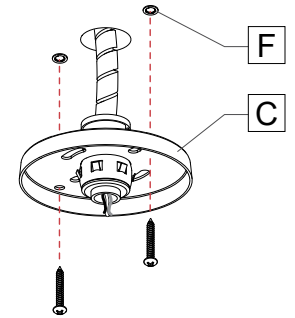

#### 2 MAKE ELECTRICAL CONNECTIONS.



Make electrical connections between the fixture cable [G] and the main power [D] using wire nuts (by others).

**Warning:** A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

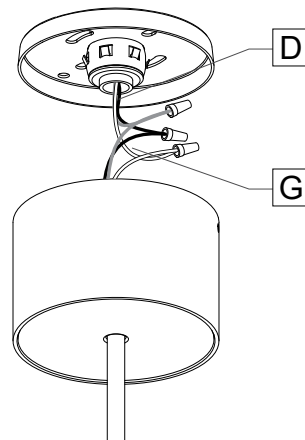

#### 3 INSTALL HOUSING ASSEMBLY.

Place the housing assembly [B] back to the adapter piece [C] and secure with the provided set screws [A].

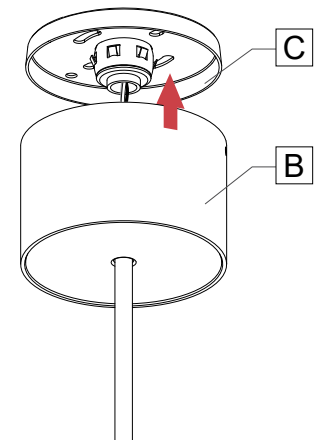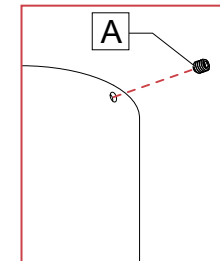

# FLAIR

## Pendant - Direct mount

### WIRING DIAGRAMS (1 Circuit)

For electrical connections, follow the wiring diagrams according to specified drivers in product configuration.

#### INTEGRAL DRIVER - STATIC WHITE, SOLA

D1 / SD1		ELV / TRI / SELV / STRI																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>BLACK</td><td>HOT</td></tr> <tr><td>WHITE</td><td>NEUTRAL</td></tr> <tr><td>GREEN</td><td>GROUND</td></tr> <tr><td>PURPLE</td><td>DIM (+) 0-10V</td></tr> <tr><td>PINK or GRAY</td><td>DIM (-) 0-10V</td></tr> </table>	BLACK	HOT	WHITE	NEUTRAL	GREEN	GROUND	PURPLE	DIM (+) 0-10V	PINK or GRAY	DIM (-) 0-10V		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>BLACK</td><td>HOT</td></tr> <tr><td>WHITE</td><td>NEUTRAL</td></tr> <tr><td>GREEN</td><td>GROUND</td></tr> </table> <p>Note: 120V max input voltage</p>	BLACK	HOT	WHITE	NEUTRAL	GREEN	GROUND	
BLACK	HOT																		
WHITE	NEUTRAL																		
GREEN	GROUND																		
PURPLE	DIM (+) 0-10V																		
PINK or GRAY	DIM (-) 0-10V																		
BLACK	HOT																		
WHITE	NEUTRAL																		
GREEN	GROUND																		

#### REMOTE DRIVER - STATIC WHITE, SOLA

RDA		RD1 / RELD1 / RELD0 / RSD1															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>RED</td><td>LED (+)</td></tr> <tr><td>BLUE</td><td>LED (-)</td></tr> </table> <p><b>Note:</b> For remote driver wiring in the remote driver box (RDB), refer to the applicable driver wiring.</p> <p>For max wire distance from driver, please check our website: <a href="http://WWW.LUMENWERX.COM">WWW.LUMENWERX.COM</a></p>	RED	LED (+)	BLUE	LED (-)		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>BLACK</td><td>HOT</td></tr> <tr><td>WHITE</td><td>NEUTRAL</td></tr> <tr><td>GREEN</td><td>GROUND</td></tr> <tr><td>PURPLE</td><td>DIM (+) 0-10V</td></tr> <tr><td>PINK or GRAY</td><td>DIM (-) 0-10V</td></tr> </table>	BLACK	HOT	WHITE	NEUTRAL	GREEN	GROUND	PURPLE	DIM (+) 0-10V	PINK or GRAY	DIM (-) 0-10V	
RED	LED (+)																
BLUE	LED (-)																
BLACK	HOT																
WHITE	NEUTRAL																
GREEN	GROUND																
PURPLE	DIM (+) 0-10V																
PINK or GRAY	DIM (-) 0-10V																


RLTEA2W / RELV / RTRI / RSELV / RSTRI		RLDE1																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>BLACK</td><td>HOT</td></tr> <tr><td>WHITE</td><td>NEUTRAL</td></tr> <tr><td>GREEN</td><td>GROUND</td></tr> </table> <p>Note: 120V max input voltage</p>	BLACK	HOT	WHITE	NEUTRAL	GREEN	GROUND		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>BLACK</td><td>HOT</td></tr> <tr><td>WHITE</td><td>NEUTRAL</td></tr> <tr><td>GREEN</td><td>GROUND</td></tr> <tr><td>PURPLE</td><td>E1 TO ECOSYSTEM</td></tr> <tr><td>PINK or GRAY</td><td>E2 DIGITAL LINK</td></tr> </table>	BLACK	HOT	WHITE	NEUTRAL	GREEN	GROUND	PURPLE	E1 TO ECOSYSTEM	PINK or GRAY	E2 DIGITAL LINK	
BLACK	HOT																		
WHITE	NEUTRAL																		
GREEN	GROUND																		
BLACK	HOT																		
WHITE	NEUTRAL																		
GREEN	GROUND																		
PURPLE	E1 TO ECOSYSTEM																		
PINK or GRAY	E2 DIGITAL LINK																		

### REMOTE DRIVER - DUO

RED	LED (+)
BLUE	LED (-)


**Note:**  
For remote driver wiring in the remote driver box (RDB), refer to the applicable driver wiring.

For max wire distance from driver, please check our website: [WWW.LUMENWERX.COM](http://WWW.LUMENWERX.COM)

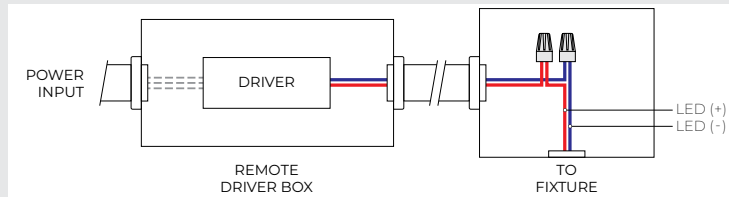

### RDD1


BLACK	HOT
WHITE	NEUTRAL
GREEN	GROUND
PURPLE	DIM (+) 0-10V
RED	CCT (+) 0-10V
PINK or GRAY	DIM & CCT (-) 0-10V

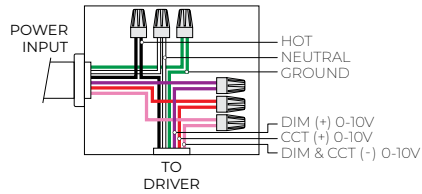

**Note:**  
Common negative for dimming & CCT


### RDDA / RDDA8

BLACK	HOT
WHITE	NEUTRAL
GREEN	GROUND
PURPLE	DALI (+)
PINK or GRAY	DALI (-)

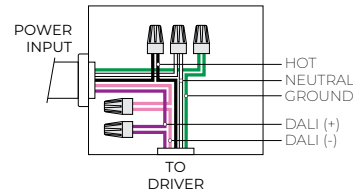


### RPSQ0

BLACK	HOT
WHITE	NEUTRAL
GREEN	GROUND
PURPLE	T1 TO
PINK or GRAY	T2 DIGITAL LINK

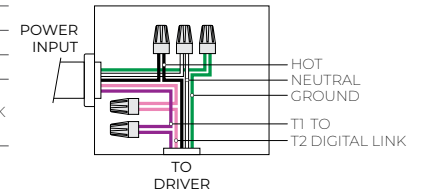

### RDMX

BLACK	HOT
WHITE	NEUTRAL
GREEN	GROUND
WHITE	DMX (+)
BLACK	DMX (-)
GREEN	SHIELD
PURPLE	DMX (+)
PINK or GRAY	DMX (-)
RED	SHIELD

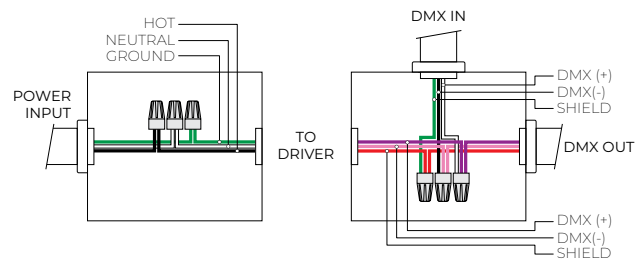

**Note:**  
- Must follow DMX wiring architecture  
- Use low capacitance wiring for DMX network