


**IMPORTANT:** Installation instructions are shown with Mikro and applies to Mikro and Mikro Plus

**NOTE:** Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

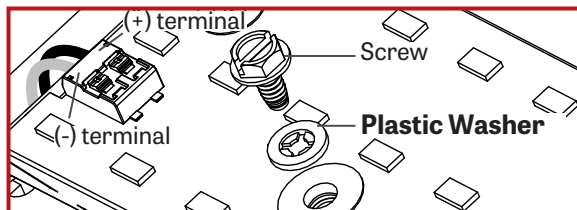


### 1 SINGLE FIXTURE

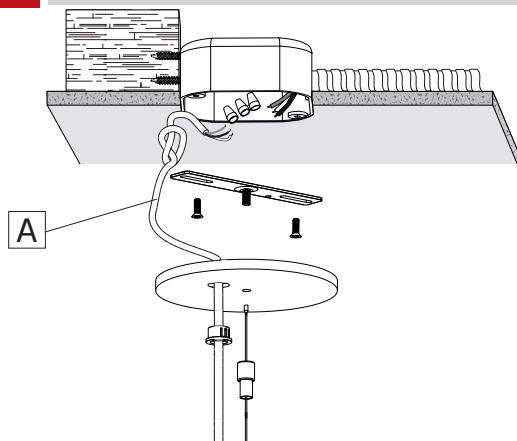


Locate ceiling mounting points according to supplied client drawing. Make a knot in the power cord (A) and then connect it to the ceiling power feed. Install cross bar to the junction box.

### 2 POWER SIDE

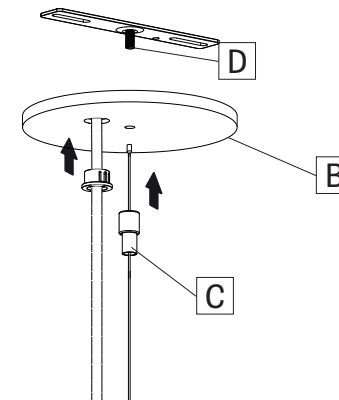


Secure canopy (B) with grip lock (C) on threaded rod (D).

### 3 NON-POWER SIDE

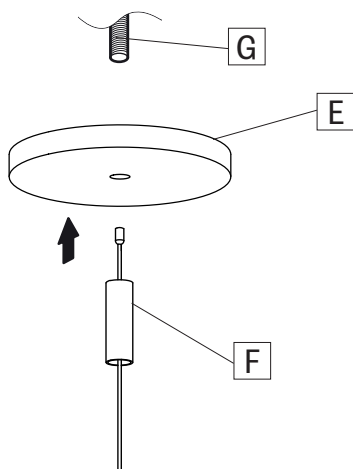


Secure canopy (E) with cable coupler (F) on threaded rod (G) (by other).

### 4

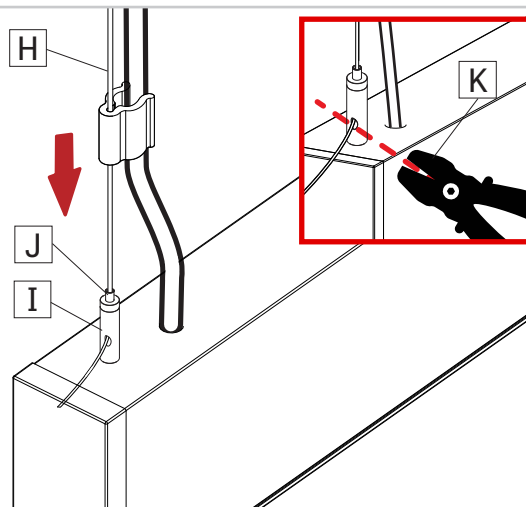


Insert the aircraft cable (H) into the griplock (I). Adjust the cable (H) length by pushing the feeder tube (J) and **cut the excess cable** with an aircraft cable cutter (K).

### 5

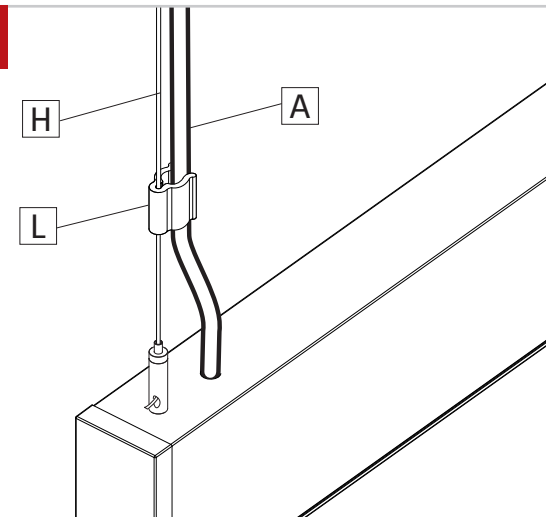


Secure power cord (A) to aircraft cable (H) with plastic clip (L).

### 6 CONTINUOUS SYSTEM

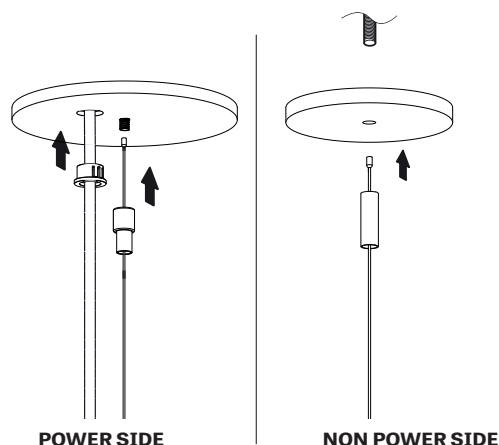


For a continuous system, repeat steps 1 to 3 for all mounting.

### 7

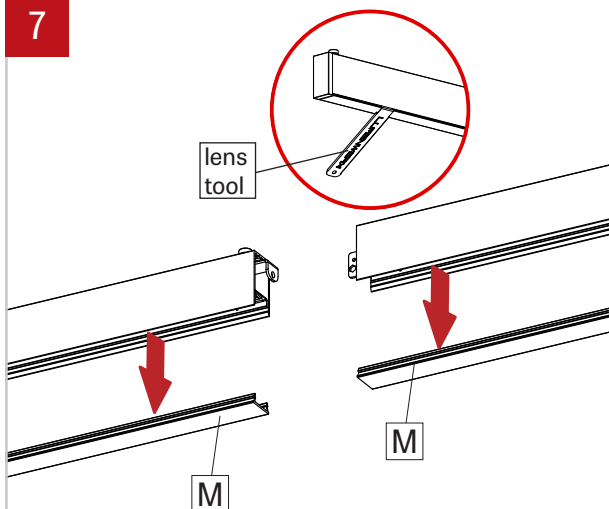


Remove the lenses (M) for all fixtures in the run with the included lens tool. If direct/indirect fixtures, only remove the direct lenses.

### 8

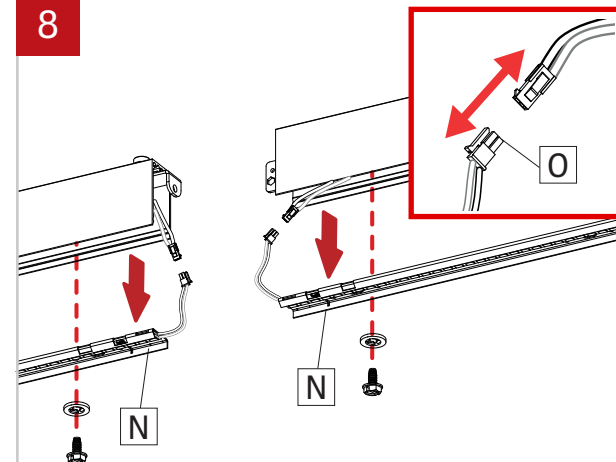


Disconnect molex quick connector (O) from the LED board. Unscrew the cartridges (N) and remove them from the fixture. Place them in a safe place. If direct/indirect fixtures, only remove the direct cartridge.

### 9 MIKRO

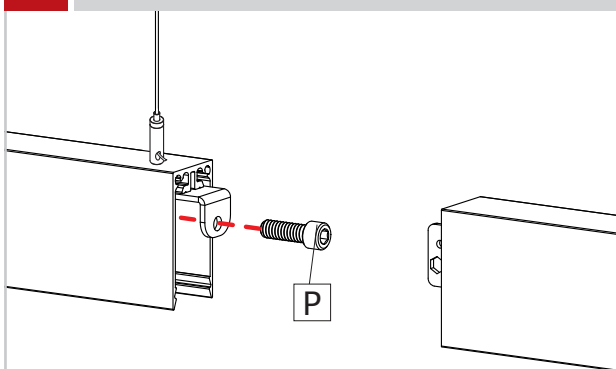


Install the aircraft cables and the wire ferrule on the first fixture. Then install it on the second fixture (as shown in steps 4 and 5). Remove the screw (P) on the joiner and put it in a safe place.

### 10 MIKRO

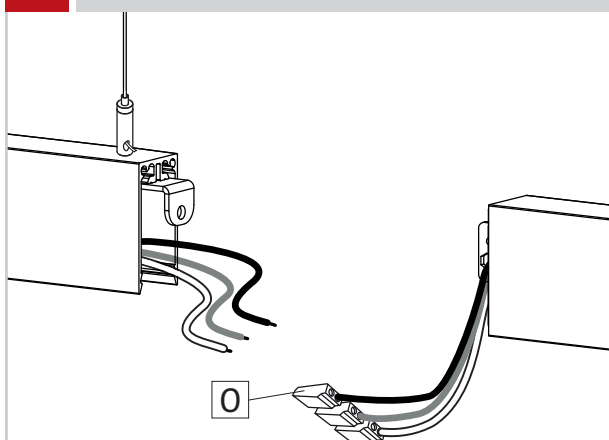


Connect wires between joining fixtures using quick connectors (O). Push the wires inside the second fixture.

### 11 MIKRO

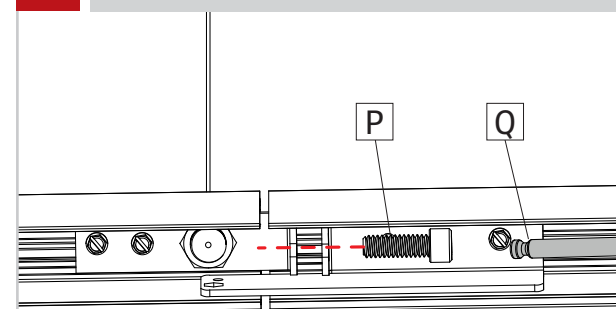


Join fixtures using align pins as guide. Put back in place the provided screw (P) (using 3/16" Ball-End Screwdriver (Q) provided). Make sure that no wires or aircraft cable are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (P) to pull the extrusions together. Repeat steps 9 to 11 for all others fixtures in the run.

### 12 MIKRO PLUS

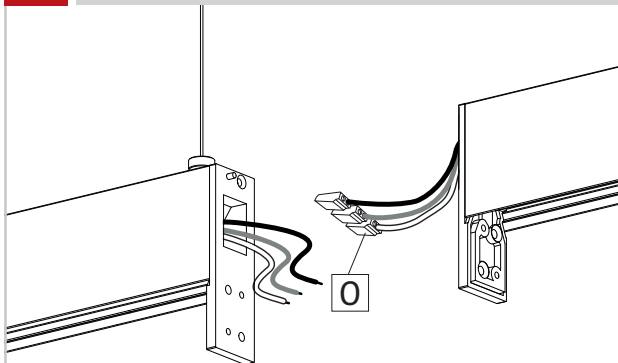


Connect wires between joining fixtures using quick connectors (O). Push the wires inside the second fixture.

### 13 MIKRO PLUS

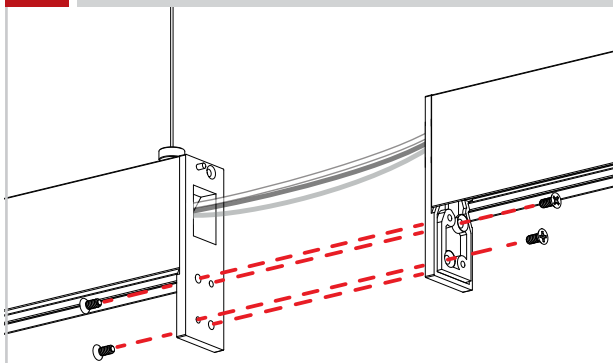


Join fixtures using two screws on each side. Make sure that no wires or aircraft cable are placed in between the extrusions, preventing the fixtures to be joined. Repeat steps 12 and 13 for all others fixtures in the run.

### 14

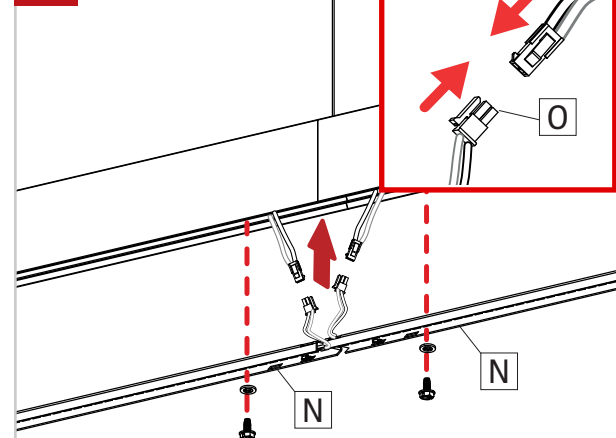

Reconnect molex quick connector (O) to the LED boards. Screw the cartridge (N) back in place by **using screw with plastic washer. Do not apply too much pressure.**

### 15

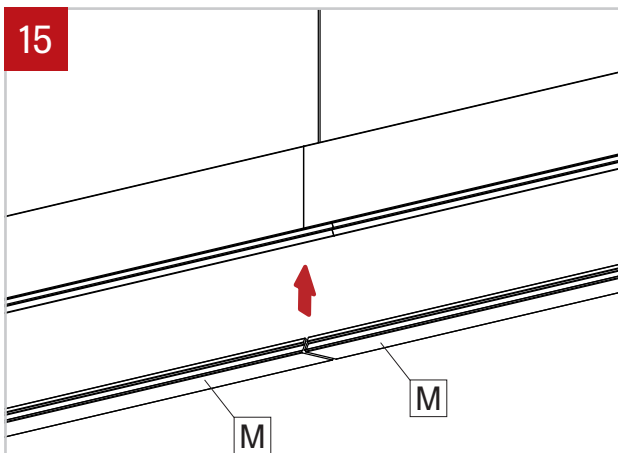

Reinstall the lenses (M).