


IMPORTANT: Installation instructions are shown with Mikro and applies to Mikro and Mikro Plus

NOTE: Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

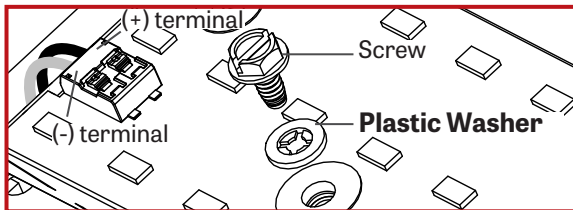


3

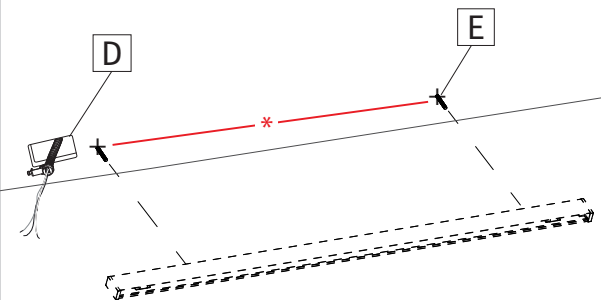

Locate junction box (D) and mounting points (E) in the ceiling. Refer to the dimensions supplied in the client drawings.



1

SINGLE FIXTURE

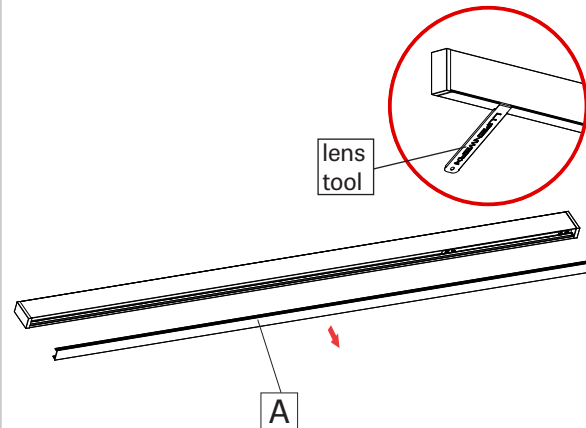


Remove the lens (A) from the fixture with the included lens tool.

2

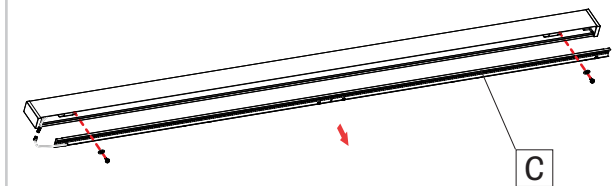


Disconnect the molex quick connector (B) from the LED board. Unscrew the cartridge (C) and remove it from the fixture. Place it in a safe place.

4

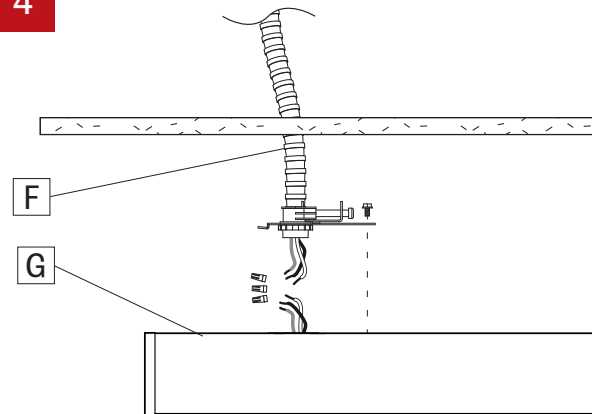


Make electrical connections between main power (F) and fixture (G).

5

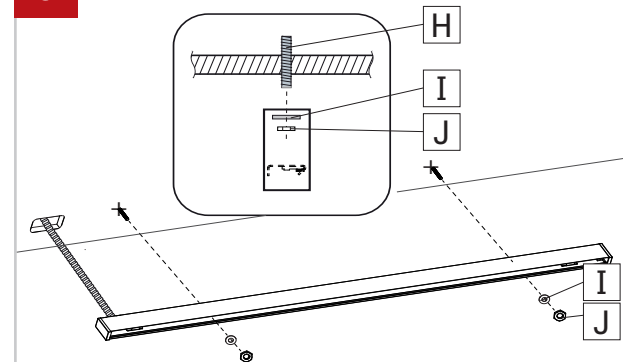

Fasten fixture to the threaded stud (H) using washers (I) and nuts (J). (If there's no threaded stud present, the fixture can be screwed directly onto the ceiling).


6

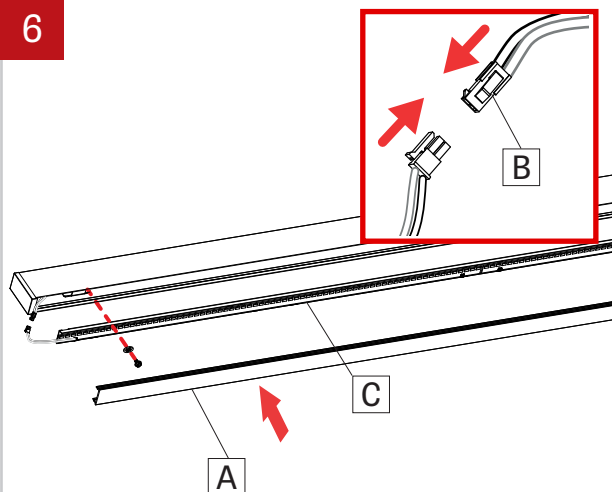

Reconnect mox quick connector (B) to the LED board. Screw the cartridge (C) back in place by **using screw with plastic washer. Do not apply too much pressure.** Reinstall the lens (A).


7

CONTINUOUS SYSTEM

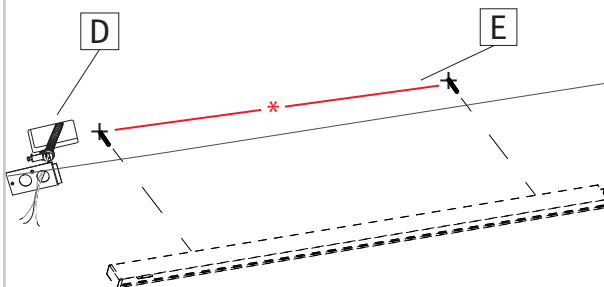


For a continuous system, locate the junction box (D) and the mounting points (E) in the ceiling. Refer to the dimensions [*] supplied in the client drawings.

8

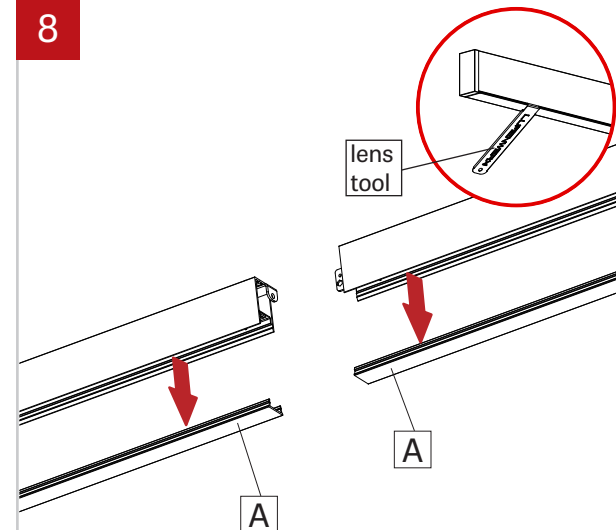


Remove the lenses (A) for all the fixtures in the run with the included lens tool.

9

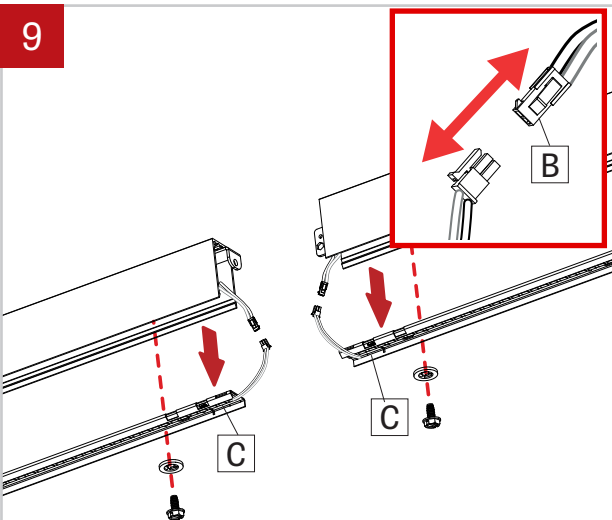


Disconnect mox quick connector (B) from the LED boards. Unscrew the cartridges (C) and remove them from the fixture. Place them in a safe place.

10

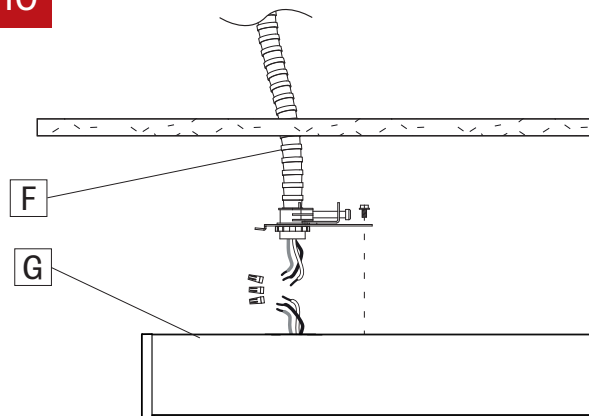


Make electrical connections between the first fixture (G) and main power (F).

11

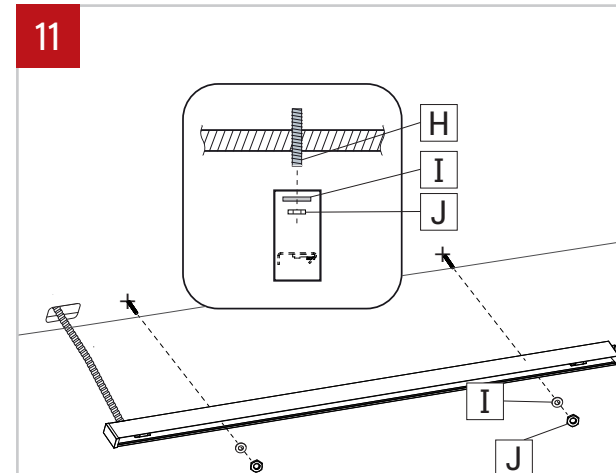


Fasten the first fixture to the threaded stud (H) using washers (I) and nuts (J).

12 MIKRO

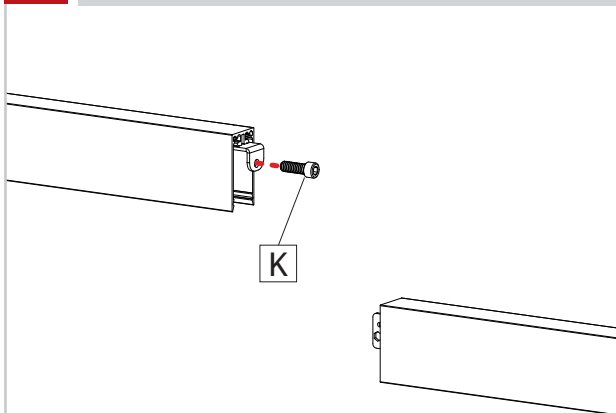


Remove the screw (K) on the joiner and put it in a safe place.

13 MIKRO

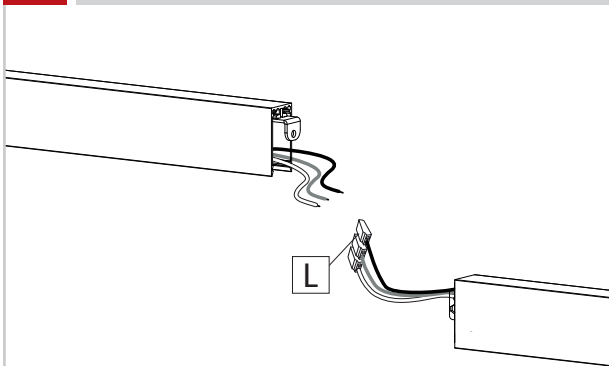


Connect wires between joining fixtures using quick connectors (L). Push the wires inside the second fixture.

14 MIKRO PLUS

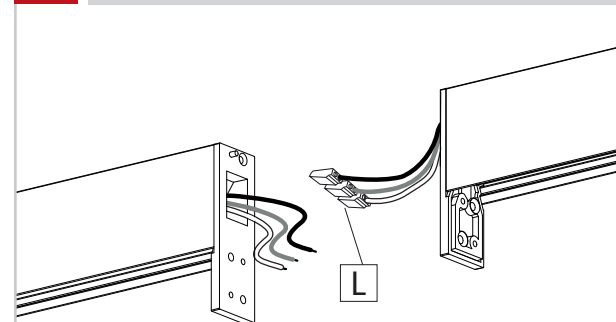


Connect wires between joining fixtures using quick connectors (L). Push the wires inside the second fixture.

15

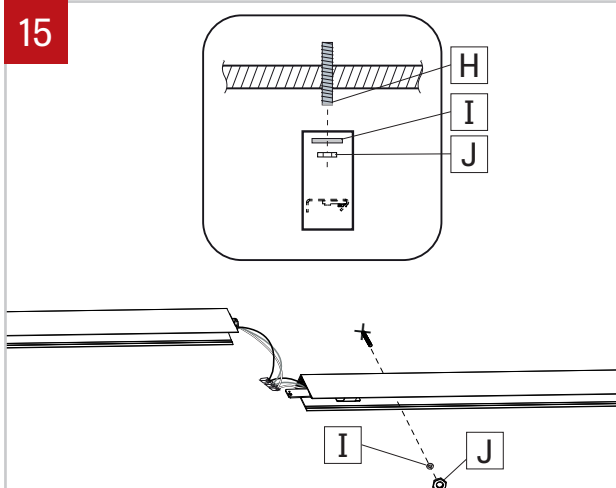


Locate mounting points of the second fixture and install the fixture. Fasten the second fixture to threaded stud (H) using washers (I) and nuts (J) without overtighten.

16 MIKRO

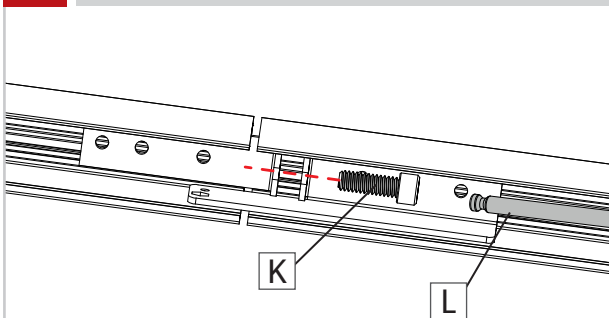

Join fixtures using align pins as guide. Put back in place the provided screw (K) (using 3/16" Ball-End Screwdriver (L) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (L) to pull the extrusions together. Repeat steps 12, 13, 15 and 16 for all others fixtures in the run.

17 MIKRO PLUS

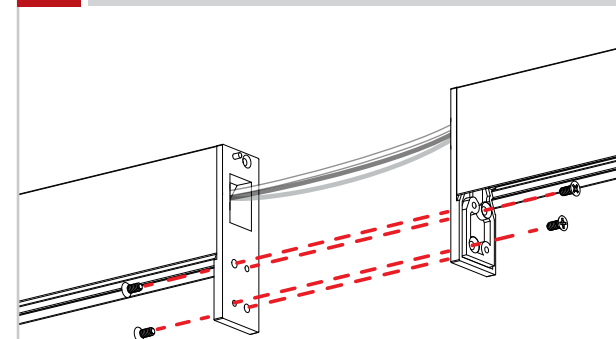

Join fixtures using two screws on each side. Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Repeat steps 14, 15 and 17 for all others fixtures in the run.

