

AERA SHALO 2"

RECESSED ADJUSTABLE



Flanged Trim



Trimless



Flanged Trim Cut Cone



Trimless Cut Cone

Aera Shalo is a family of ultra-shallow downlights designed for spaces with limited plenum height. At only 2" deep, Aera Shalo delivers the same optical precision, visual comfort, and below-ceiling serviceability that define the Aera Collection. Available in 2", 3", and 4" apertures, it offers a consistent aesthetic across multiple mounting types and distributions. The Aera Shalo Adjustable downlight allows precise aiming through a lockable tilt and rotation mechanism. Adjustments can be made quickly using a Phillips screwdriver, and beam quality remains consistent at every angle.

Beam Angles



Shapes



Round



Square

Light Source

Static White

SOLA

DUO

Full spectrum static white



Aera Shalo Brochure



AERA SHALO 2"

RECESSED ADJUSTABLE



Project: _____

Type: _____

Order Guide - Static White

For SOLA Dim-to-Warm and DUO Tunable White order guide, see page 3

| LUMINAIRE ID ¹ | TRIM STYLE | BAFFLE FINISH | TRIM FINISH Specify NA for trimless | LENS ³ At baffle |
|---|--|---|---|--|
| AES2RRA - Aera Shalo 2" Round Recessed Adjustable AES2SRA - Aera Shalo 2" Square Recessed Adjustable ¹ Fixed and Wall Wash also available. Consult other spec sheets. | TRM ² - Flanged trim TLMP ² - Trimless drywall mudplate TRMC ² - Flanged trim cutcone TLMPC ² - Trimless cutcone drywall mudplate ² 30° maximum tilt. | FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze FPF - Primer finish CF# - Custom finish, specify RAL# | FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze FPF - Primer finish CF# - Custom finish, specify RAL# NA - Not applicable | SDL - Soft diffused lens, Solite FDL - Frosted diffused lens CL - Clear lens NOL - No lens +WET ^{4,5} - Wet location ³ See page 4 for details. ⁴ Must be specified with the TRM or TRMC trim option, and either SDL, FDL, or CL lens option. ⁵ To specify, add +WET to the selected lens option, e.g. SDL+WET. |

| LIGHT SOURCE | BEAM | OPTICAL ACCESSORIES ⁷ At light element | CRI | COLOR TEMP. | VOLTAGE |
|---|---|---|--|--|---|
| SW ⁶ - Static white FS ⁶ - Full spectrum static white ⁶ 2-step | 15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood | LSDL ⁸ - Soft diffused lens, Solite LFDL ⁸ - Frosted diffused lens LS - Linear spread HEX - Hex louver NA - None ⁷ See page 4 for details. ⁸ Only available with CL or NOL lens options. | <u>Static white</u> 80CRI - 80+ CRI 90CRI - 90+ CRI 95CRI - 95+ CRI <u>Full spectrum static white</u> 95CRI - 95+ CRI | 24K ⁹ - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K ⁹ - 5000K ⁹ Not available with 95+ CRI. | 120V - 120V 277V - 277V UNV - 120V-277V 347V ¹⁰ - 347V ¹⁰ Available with RD1 driver only. Please consult factory. |

| WATTAGE ¹¹ | DIMMING | INSTALLATION TYPE | MOUNTING OPTION ¹⁸ |
|---|--|--|--|
| 7W - 7 W output 10W ¹² - 10 W output ¹¹ Lumen outputs are reduced with full spectrum, consult factory. ¹² Not available with IC/CP. | INTEGRAL D1 - 1% 0-10V ELV ¹³ - ELV 120V TRI ¹³ - TRIAC 120V ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V ¹³ Available with 120V only ¹⁴ A remote driver box is provided. ¹⁵ On-site commissioning is required. ¹⁶ To specify, add +EB to the selected dimming option, e.g. RD1+EB. | REMOTE ¹⁴ RD1 - 1% 0-10V RELV ¹⁵ - ELV 120V RTRI ¹⁵ - TRIAC 120V RLDE1 ¹⁵ - Lutron Hi-lume 1% Eco RDA ¹⁵ - DALI RELD1 - eldoLED 1% ECOdrive 0-10V RELDO - eldoLED 0.1% SOLOdrive 0-10V +EB ¹⁶ - Emergency battery ¹⁷ Contact factory for Chicago Plenum Type Non-IC for wattages up to 10W. | IC - Type-IC NIC - Type Non-IC CP ¹⁷ - Chicago Plenum Type-IC (CCEA) ASB - Adjustable standard bar hangers ASB6 - Adjustable standard bar hangers for 6" wide grid system FMB - Flush mount bars ACB - Adjustable commercial bar hangers NA - No bar hangers ¹⁸ See page 7 for more details. |



AERA SHALO 2"

RECESSED ADJUSTABLE



Project: _____

Type: _____

Order Guide - SOLA Dim-to-Warm and DUO Tunable White

For static white order guide, see page 2

| LUMINAIRE ID ¹ | TRIM STYLE | BAFFLE FINISH | TRIM FINISH Specify NA for trimless | LENS ³ At baffle |
|--|--|---|---|---|
| AES2RRA - Aera Shalo 2" Round Recessed Adjustable AES2SRA - Aera Shalo 2" Square Recessed Adjustable ¹ Fixed and Wall Wash also available. Consult other spec sheets. | TRM² - Flanged trim TLMP² - Trimless drywall mudplate TRMC² - Flanged trim cutcone TLMPC² - Trimless cutcone drywall mudplate ² 30° maximum tilt. | FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze FPF - Primer finish CF# - Custom finish, specify RAL# | FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze FPF - Primer finish CF# - Custom finish, specify RAL# NA - Not applicable | SDL - Soft diffused lens, Solite FDL - Frosted diffused lens CL - Clear lens +WET^{4,5} - Wet location ³ See page 4 for details. ⁴ Must be specified with the TRM or TRMC trim option, and either SDL, FDL, or CL lens option. ⁵ To specify, add +WET to the selected lens option, e.g. SDL+WET. |

| LIGHT SOURCE | BEAM | OPTICAL ACCESSORIES ⁷ At light element | CRI | COLOR TEMP. | VOLTAGE |
|---|---|---|------------------------|---|--|
| | | | 90CRI | | |
| SOLA⁶ - Dim-to-warm single channel control DUO⁶ - Tunable white 2-channel control ⁶ 3-step | 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood | LSDL⁸ - Soft diffused lens, Solite LFDL⁸ - Frosted diffused lens LS - Linear spread HEX - Hex louver NA - None ⁷ See page 4 for details. ⁸ Only available with CL or NOL lens options. | 90CRI - 90+ CRI | SOLA 30K18K - 3000K to 1800K 27K18K - 2700K to 1800K DUO 65K27K - 6500K to 2700K 50K27K - 5000K to 2700K | 120V - 120V 277V - 277V UNV - 120V-277V |

| WATTAGE | DIMMING | INSTALLATION TYPE | MOUNTING OPTION ¹³ |
|---|--|---|--|
| | | NIC | |
| SOLA 10W - 10 W output DUO 8W - 8 W output | INTEGRAL SOLA SD1 - Single 0-10V input SELV⁹ - ELV 120V STRI⁹ - TRIAC 120V DUO DD1 - Dual 0-10V input for CCT/intensity ⁹ Available with 120V only. ¹⁰ A remote driver box is provided. ¹¹ On-site commissioning is required. ¹² To specify, add +EB to the selected dimming option, e.g. RDI+EB. | REMOTE¹⁰ SOLA RSD1 - Single 0-10V input RSELV⁹ - ELV 120V RSTRI⁹ - TRIAC 120V DUO RDMX¹¹ - DMX RDDA¹¹ - DALI DT6 RDDA8¹¹ - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RLD2¹¹ - Lutron DALI-2 digital +EB¹² - Emergency battery | NIC - Type Non-IC ASB - Adjustable standard bar hangers ASB6 - Adjustable standard bar hangers for 6" wide grid system FMB - Flush mount bars ACB - Adjustable commercial bar hangers NA - No bar hangers ¹³ See page 7 for more details. |




AERA SHALO 2"

RECESSED ADJUSTABLE




Housing Dimensions

Minimum plenum height - 2" (FMB, ASB6); 4 3/16" (ASB, ACB)

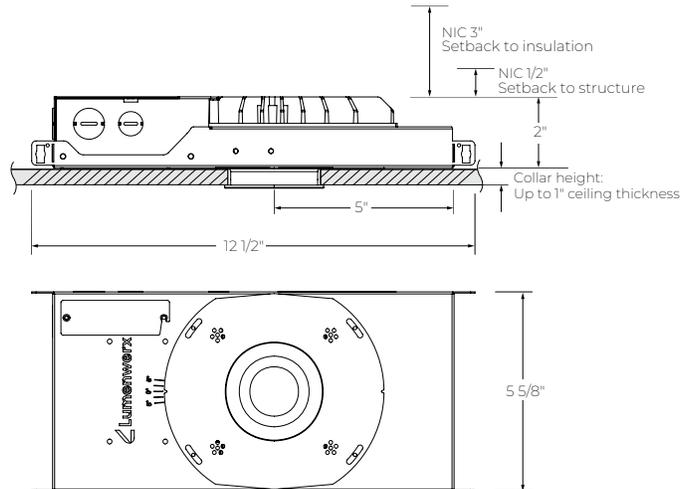

* Bar hangers are not shown in the drawing.

LENS AND ACCESSORIES

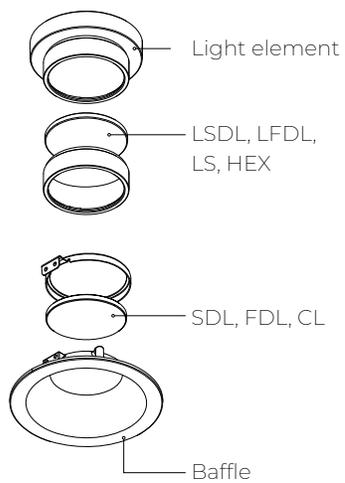


AERA SHALO 2"

RECESSED ADJUSTABLE




Trim Details

Round

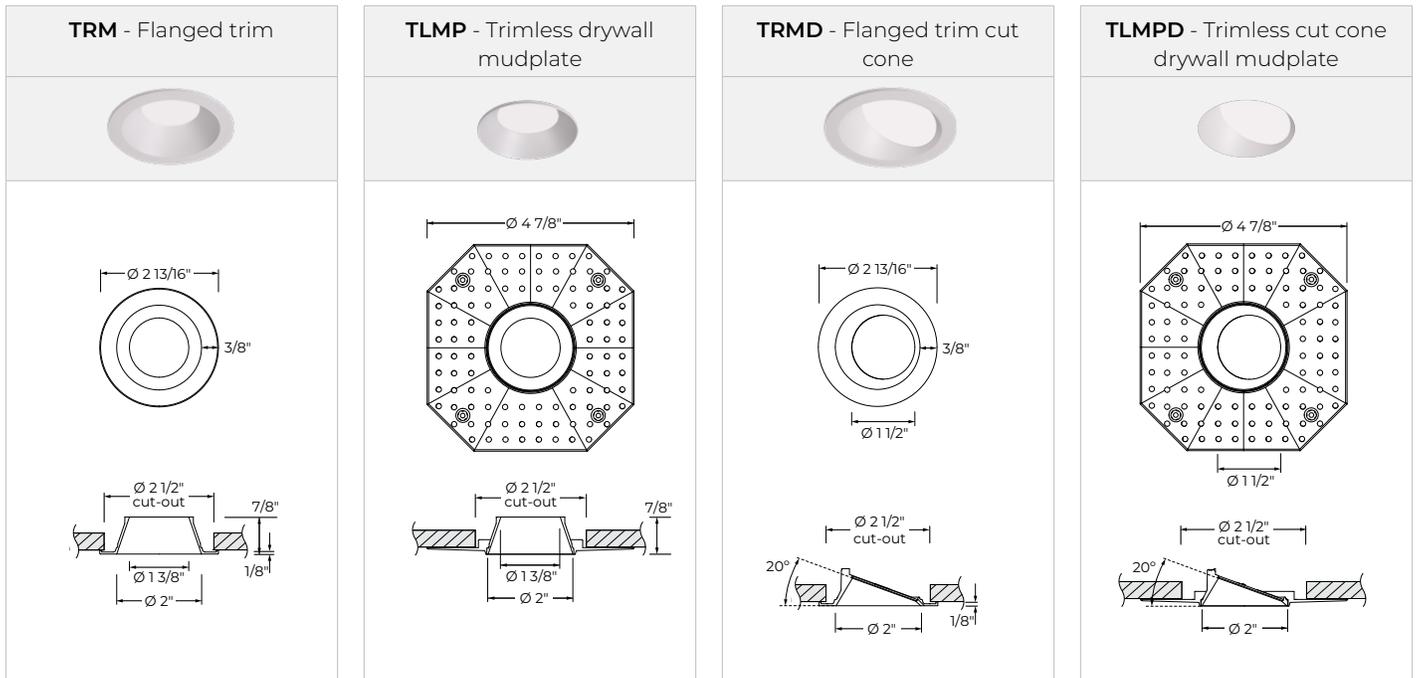

Square

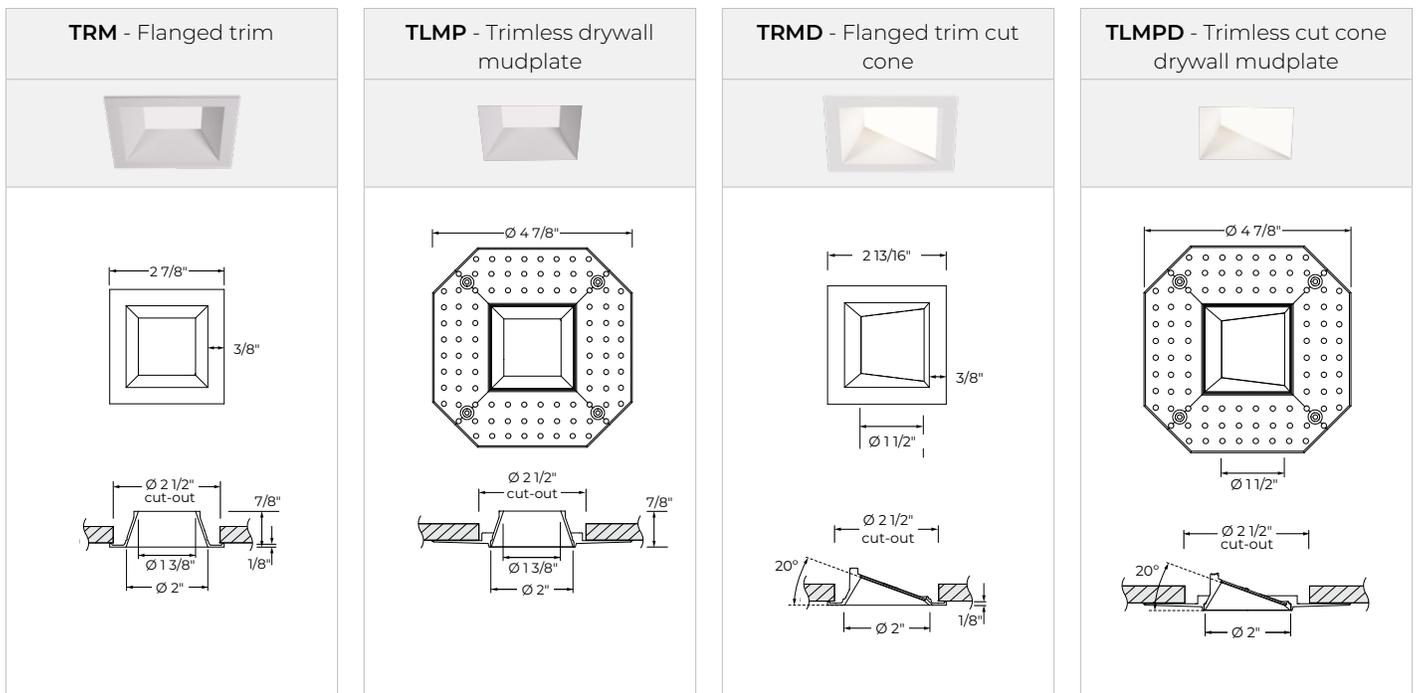

AERA SHALO 2"

RECESSED ADJUSTABLE



Finishes



FTMW - Matte white



FTMB - Matte black



FSPC - Satin silver




FSSPC - Matte silver



FCHP - Champagne



FDBZ - Dark bronze



FPF - Primer finish

| | |
|--|---|
| TRM - Flanged trim | TLMP - Trimless drywall mudplate |
| TRMC - Flanged trim cut cone | TLMPC - Trimless cut cone drywall mudplate |
| | |
| <p>■ Baffle finish</p> <p>■ Trim flange finish</p> | |


AERA SHALO 2"

RECESSED ADJUSTABLE




Mounting Options

ASB - Adjustable Standard Bar Hangers

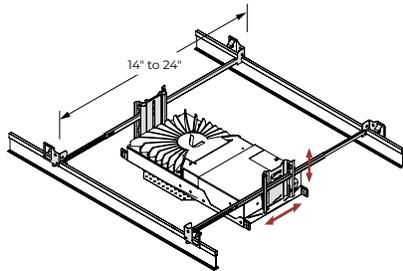


- Use in commercial and residential applications.
- Suitable for grid ceiling and drywall mounting.
- Adjustable to various heights.
- Joist spacing: 14" to 24".

ASB6 - Adjustable standard bar hangers for 6" wide grid system

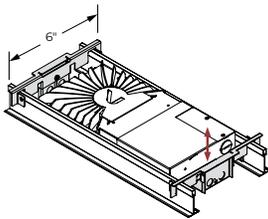


- Compatible with Techzone™ grid system.
- Lockable and self centering in the grid.
- Adjustable to various heights.
- T-bar spacing: 6"

FMB - Flush Mount Bars

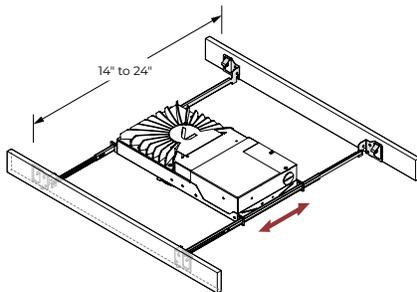

- Use in residential applications.
- Suitable for wood, metal, and drywall mounting.
- Joist spacing: 14" to 24".

ACB - Adjustable Commercial Bar Hangers

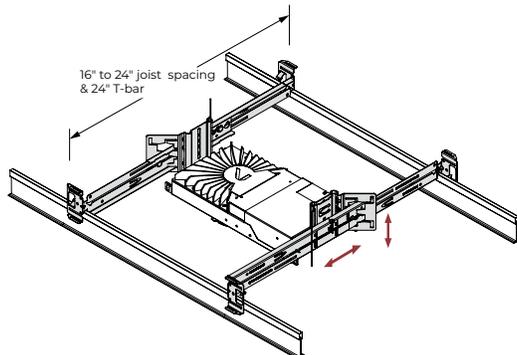

- Use in commercial and residential applications.
- Suitable for grid ceiling, drywall, metal, wood, and frame mounting.
- Adjustable to various heights.
- Fits into C-channel notches in a butterfly bracket.
- Joist spacing: 16" to 24". Extensions to 36" and 48" available, consult factory.
- T-bar spacing: 24"

AERA SHALO 2"

RECESSED ADJUSTABLE



Technical Specifications

OPTIC

AeraBlend™ is an advanced optical design that delivers chromatic consistency and beam precision while ensuring flawless color mixing, uniform distribution, and visual comfort.

LIGHT SOURCE

Static white

Compact COB (Chip-On-Board) LED module, available in 2400K, 2700K, 3000K, 3500K, 4000K, and 5000K with a choice of 80+ CRI, 90+CRI, or 95+ CRI, with an elevated R9 value for 90+ CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. Two color temperature range options are offered: 3000K to 1800K, and 2700K to 1800K. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool to warm LED arrays - maintaining a CRI above 90. Two color temperature range options are offered: 6500K to 2700K, and 5000K to 2700K. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency>84%, PF>0.9, THD<20%. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

Integral: 0-10V, ELV, TRIAC, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V

Remote: 0-10V, ELV, TRIAC, DALI, Lutron Hi-Lume 1% EcoSystem, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron DALI-2 digital

Emergency battery options: Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10 W, the battery provides 6 W of emergency light output. For fixtures 10 W and over, the battery provides 10 W.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire, or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing: For new construction, 20 gauge powder coated steel. 18 gauge galvanized steel junction box with ½" trade size knockouts. Adjustable standard, adjustable standard for 6" wide grid system, flush mount, and adjustable commercial bar hangers are available as mounting options.

Ceiling thickness: Up to 1"

Light element: Light element uses CoreConnect™ Technology, a magnetic, wire-free system that enables fast, secure connection and complete field serviceability.

Adjustability: Up to 30° tilt and infinite rotation

Heat sink: Die-cast aluminum

Baffle: Die-cast aluminum

Trim style: Flanged trim, trimless with mudplate, flanged trim cut cone and cut cone trimless with mudplate

Finish: Matte white, matte black, satin silver, matte silver, champagne, dark bronze, and primer finish. Custom colors also available (provide RAL #). For the primer finish option, fixture must be turned off and the lens masked before applying paint.

WEIGHT

3.1 lbs - 1.4 kg

AERA SHALO 2"

RECESSED ADJUSTABLE



LENS AND ACCESSORIES



Soft diffused lens, Solite



Frosted diffused lens



Clear lens



Linear spread



Hex louver

ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

IP44: IP44 rated for bathrooms, showers, outdoor canopies, and marquees when specified with the wet location (WET) option.

Chicago Plenum: City of Chicago approved (CCEA) when specified with CP installation type option.

IC rated: Suitable for direct contact with insulation when specified with IC or CP installation type options.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.