


**IMPORTANT:** Installation instructions are shown with Mikro and applies to Mikro and Mikro Plus

**NOTE:** Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

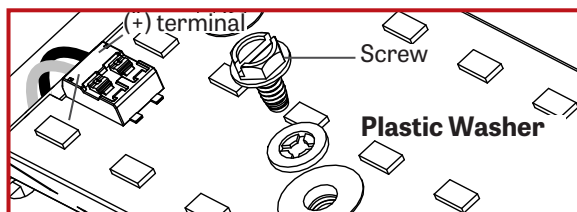


1

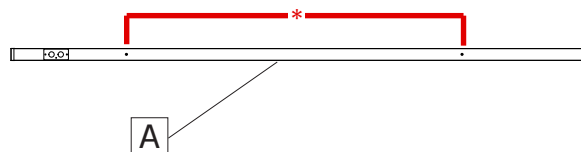


Make sure the power to the fixture (A) is turned off. Locate mounting points [\*] on the wall according to the client drawings.

2

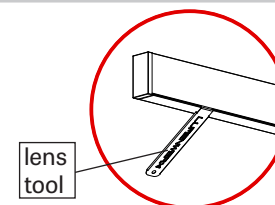


Remove lens (B) with the included lens tool.

3

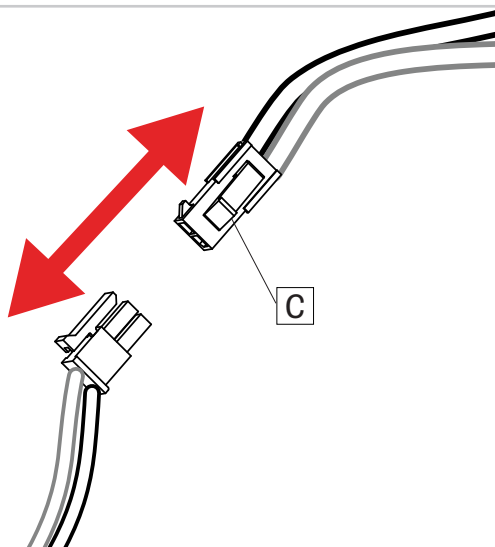


Disconnect moxex quick connector (C) from the LED board.

4

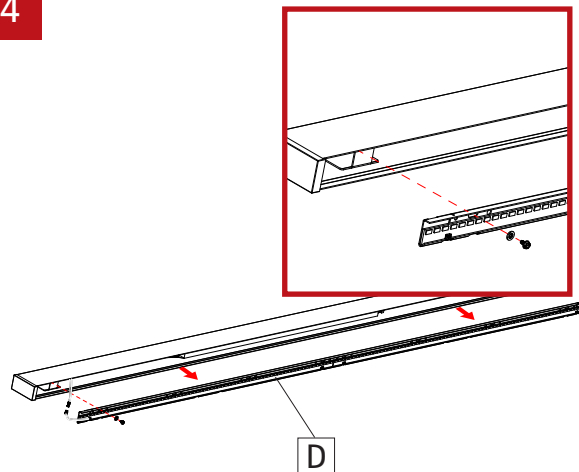


Unscrew the cartridge (D) and remove it from the fixture. Place the cartridge in a safe place.

5

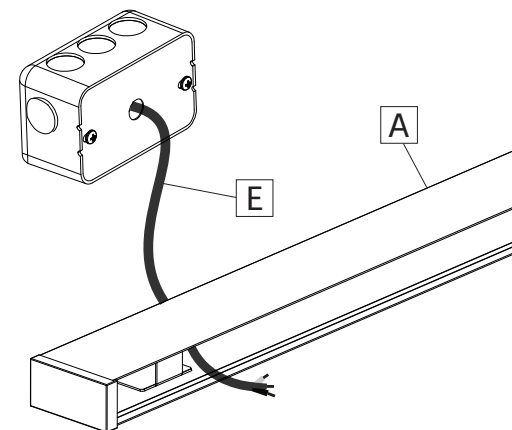


Insert wall power cable wires (E) inside the fixture (A).

8

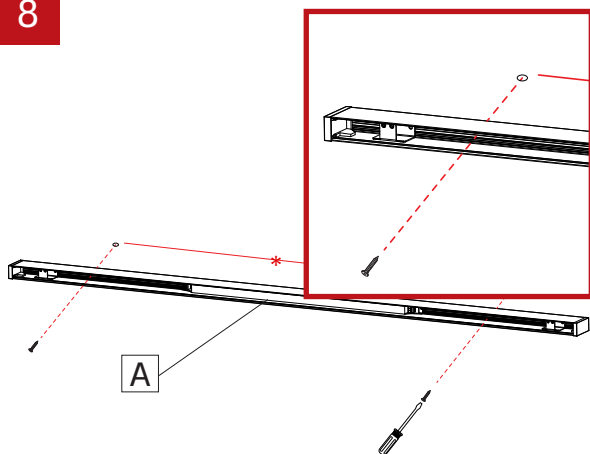


Install the fixture (A) on the wall according to the dimensions [\*] given in the client drawings. Screw the fixture (A) to attach it to the wall.

7

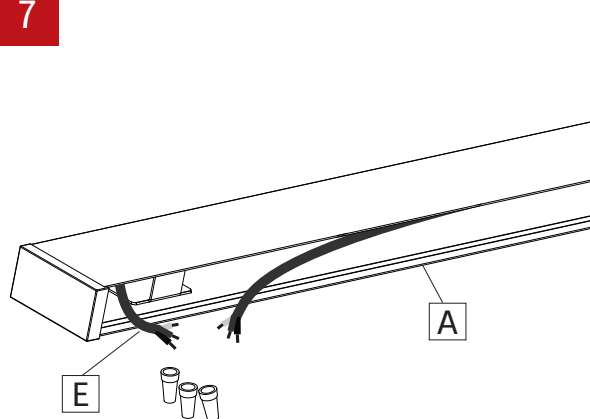


Make wire connection inside the fixture between fixture (A) and wall power cable (E).

8

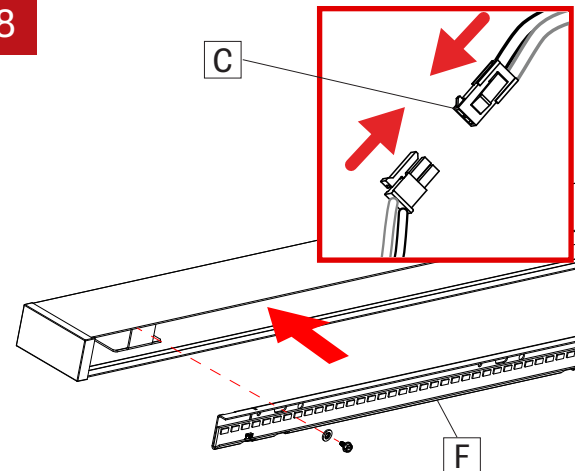

Reconnect the quick connector (C) to the LED boards. Screw the cartridge (F) back in place by **using screw with plastic washer. Do not apply too much pressure.**


9

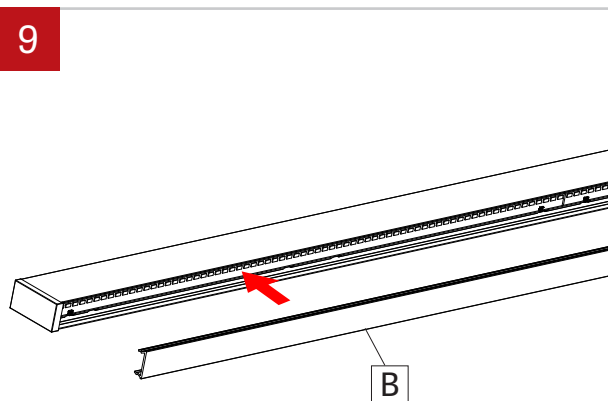

Reinstall the lens (B).


10

### CONTINUOUS SYSTEM

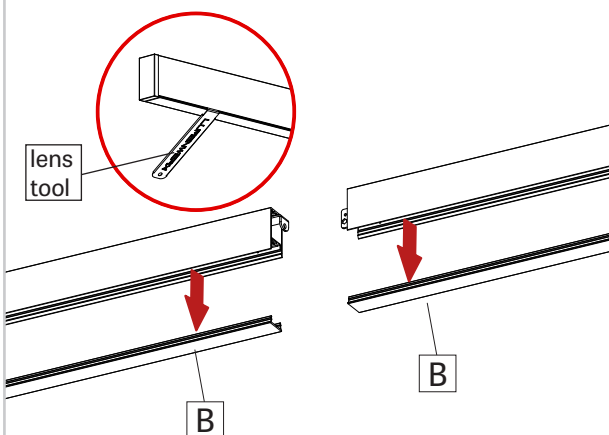


Remove the lenses (B) from all fixtures in the run with the included lens tool.

11

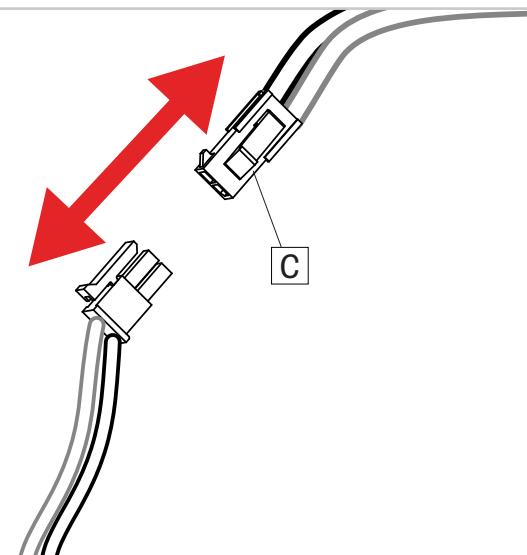


Disconnect moxex quick connector (C) from the LED board.

12

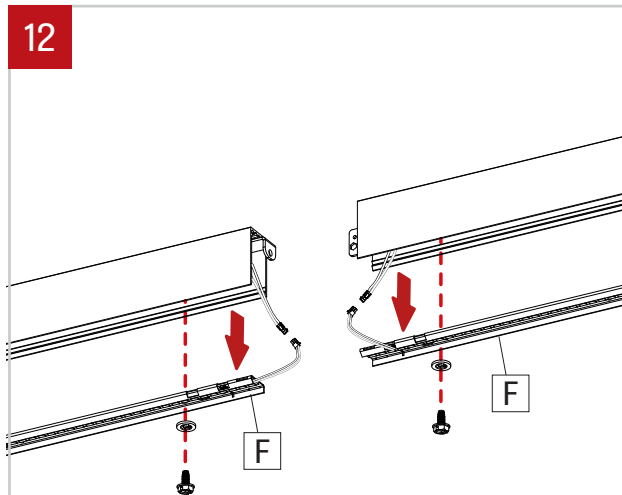


Remove the end cartridges (F) from all fixtures in the run.

13

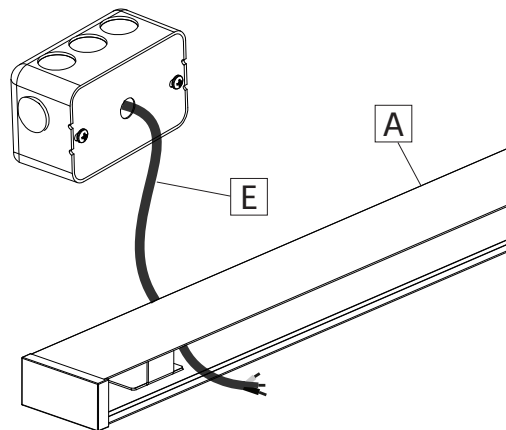


Insert wall power cable wires (E) inside the first fixture (A).

14

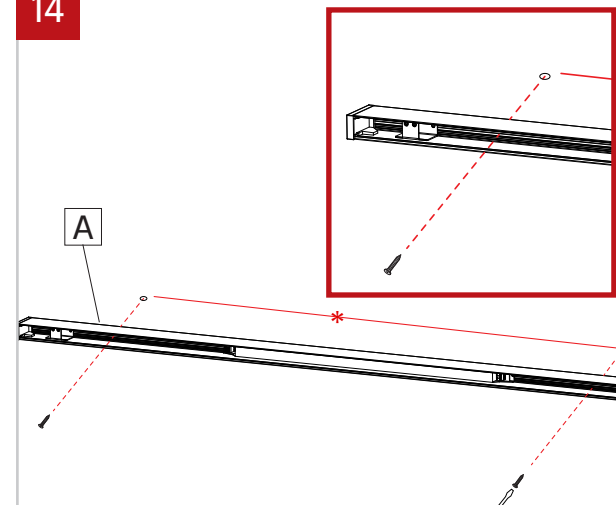

Install the first fixture (A) on the wall according to the dimensions [\*] given in the client drawings. Screw the fixture (A) to attach it to the wall.


15

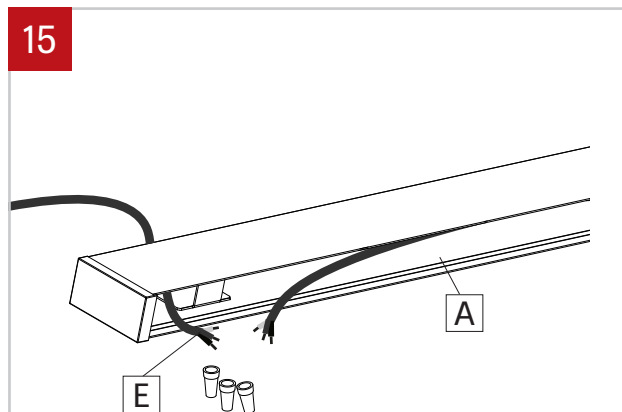

Make wire connection inside the first fixture between fixture (A) and wall power cable (E).

16


MIKRO

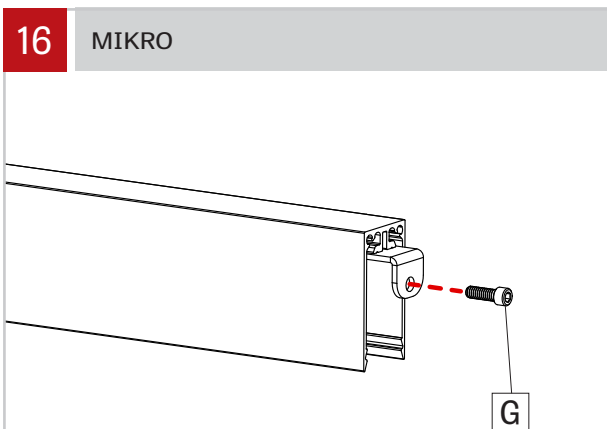

Remove the screw (G) on the joiner and put it in a safe place.


17

MIKRO

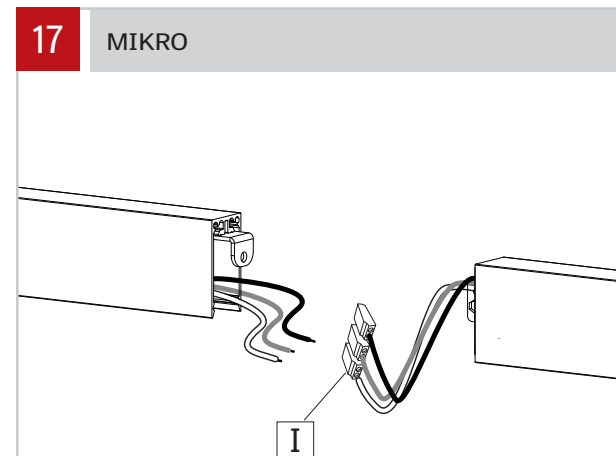


Align the fixtures and connect them by using quick connectors (I). Push the wires inside the second fixture.

### 18 MIKRO PLUS

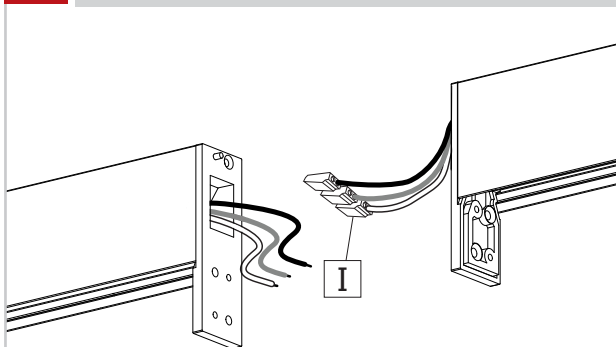


Align the fixtures and connect them by using quick connectors (I). Push the wires inside the second fixture.

### 19

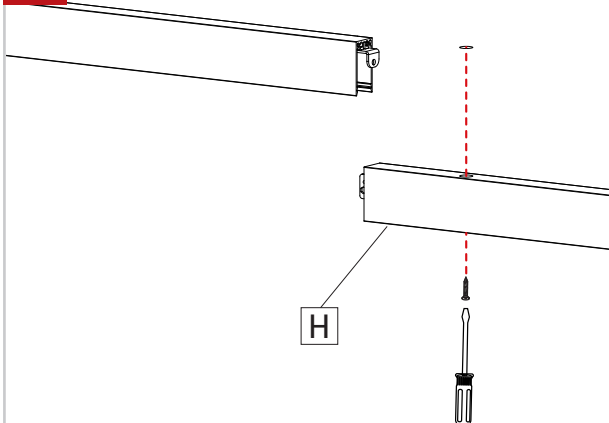


Locate mounting point of the second fixture (H) and install it. Fasten the second fixture (H) to the wall without overtightening.

### 20 MIKRO

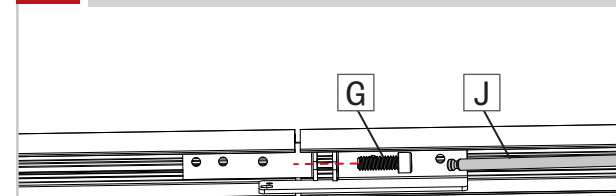


Join fixtures using align pins as guide. Put back in place the provided screw (G) (using 3/16" Ball-End Screwdriver (J) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (G) to pull the extrusions together. Repeat steps 16, 17, 19 and 20 for all other fixture. Then tighten all screws on mounting brackets.

### 21 MIKRO PLUS

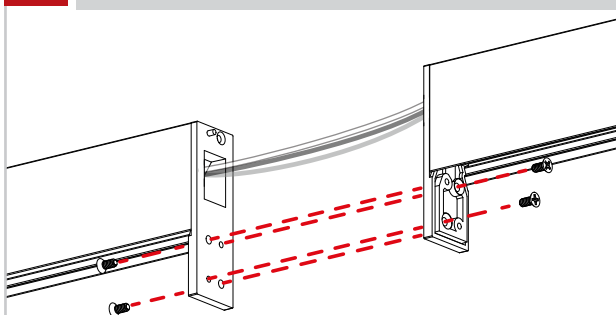


Join fixtures using two screws on each side. Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Repeat steps 18, 19 and 21 for all others fixtures in the run.

### 22

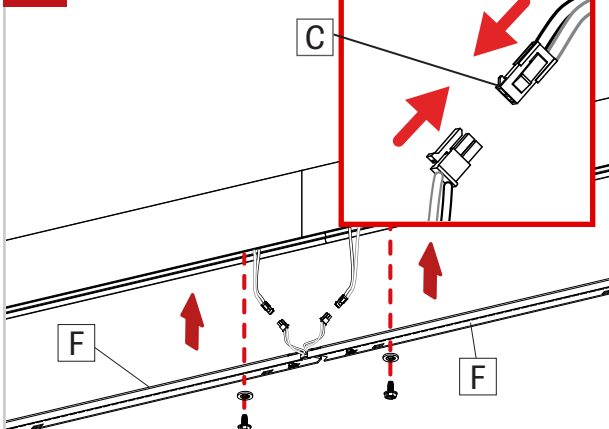

Reconnect the molex quick connector (C) to the LED boards. Screw the cartridge (F) back in place by **using screw with plastic washer. Do not apply too much pressure.**

### 23

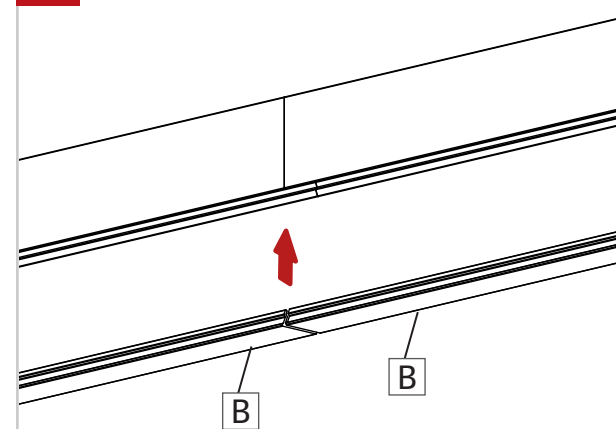

Reinstall the lenses (B).