



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

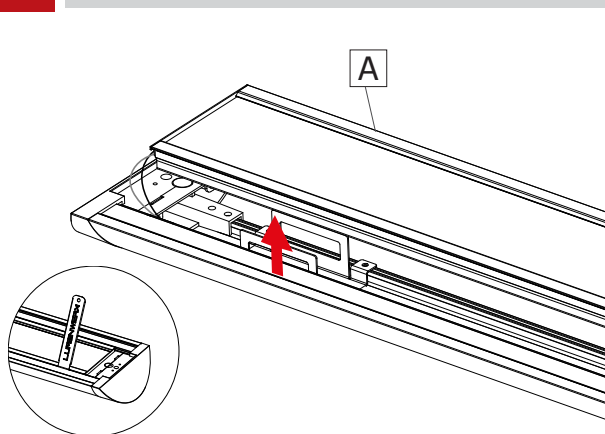

Make sure that the power to the fixture is turned off. Slowly lift up the cartridge (A) with the provided lens tool. You should feel the cartridge popping out of the fixture.


2

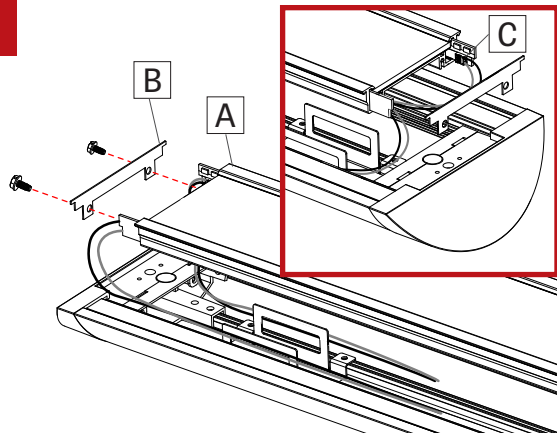

Unscrew and remove the end plate (B) of the cartridge (A). Keep it in a safe place. Slightly slide the LED boards out of the cartridge. Disconnect LED molex connectors (C) by taking a pointed object and pressing on the two tabs. Then remove the cartridge (A) and keep it in a safe place.


3

POWER SIDE

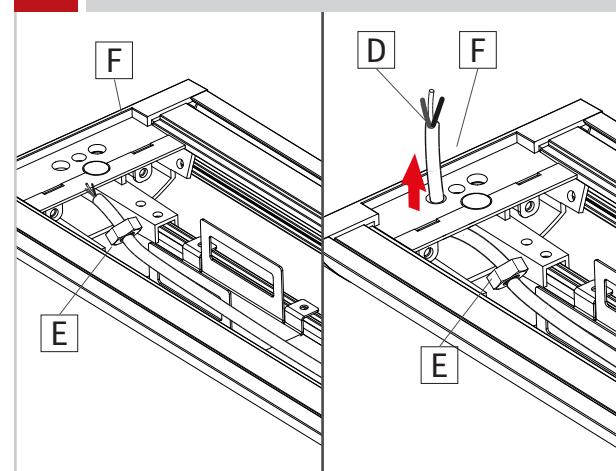


Pass the power cable (D) through the bottom nut (E) and the end cap (F).

4 POWER SIDE

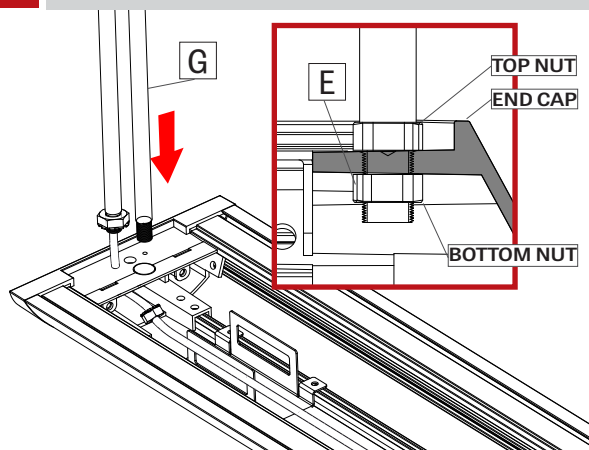

Pass the power cable through the stem. Tighten the Nut (E) to secure the stem. Screw the other stems (G) on the first fixture.


5

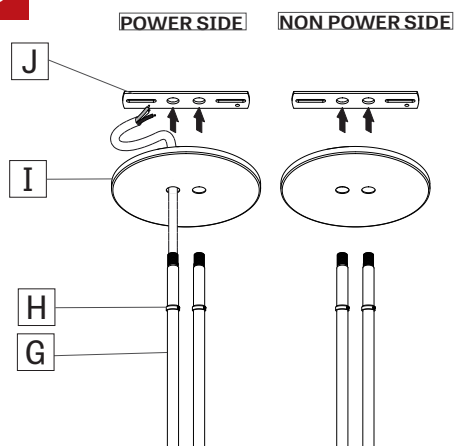

Slide the slip ring (H) and the canopy (I) onto the stem (G) and leave some space. Screw the junction box crossbar (J) onto the stem (G).

6


FOR EMERGENCY CIRCUIT

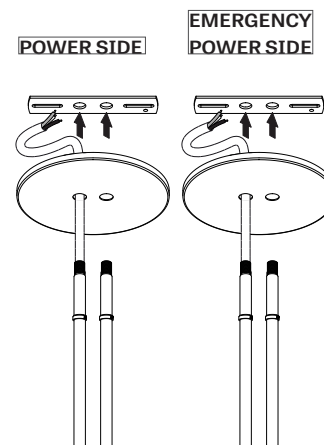

In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

7


FOR FIXTURE IN GRID CEILING

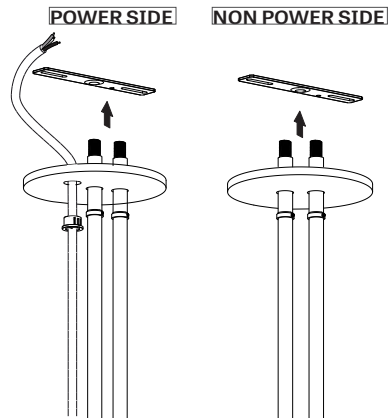

In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.

8

POWER SIDE

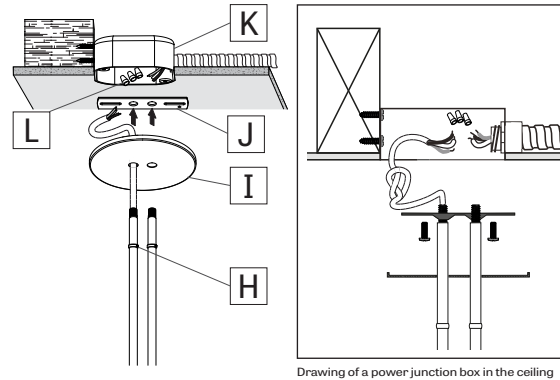


Drawing of a power junction box in the ceiling

Raise the fixture and tighten the junction box crossbar (J) with screws (by others) to the junction box (K). Make wire connection with electrical marettes (L). Then slide the canopy (I) and tighten the set up with the slip rings (H).

9

NON-POWER SIDE

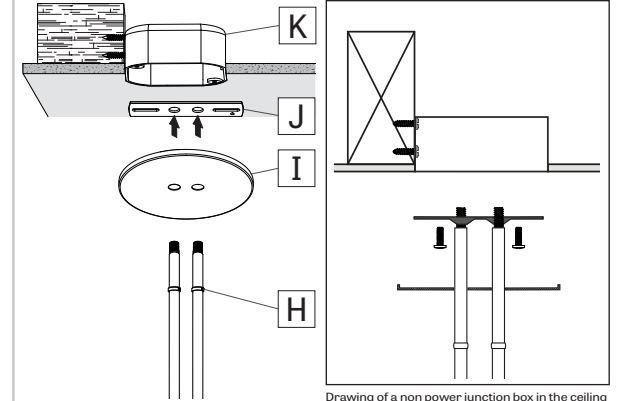


Drawing of a non power junction box in the ceiling

Raise the fixture and tighten the junction box crossbar (J) with screws (by others) to the junction box (K). Then slide the canopy (I) and tighten the set up with the slip rings (H).


10

CONTINUOUS SYSTEM

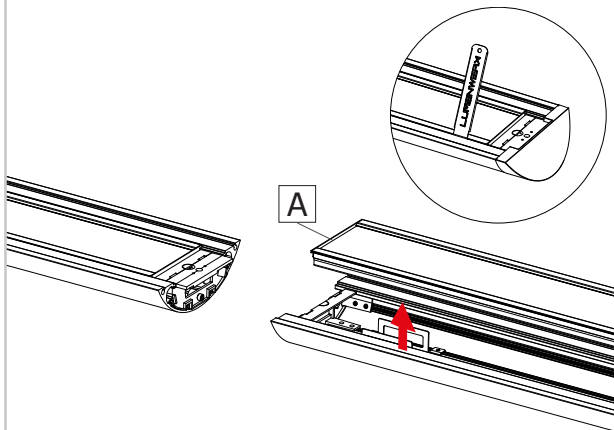

Slowly lift up the cartridge (A) on the female section with the provided lens tool. You should feel the cartridge popping out of the fixture.


11

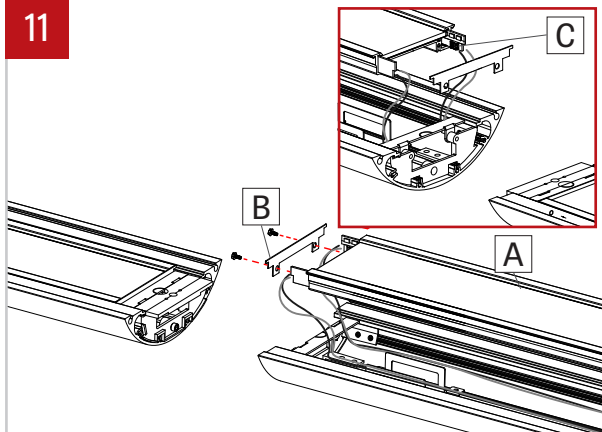


Unscrew and remove the end plate (B) of the cartridge (A). Keep it in a safe place. Slightly slide the LED boards out of the cartridge. Disconnect LED moxlex connector (C) by taking a pointed object and pressing on the two tabs. Then remove the cartridge (C) and keep it in a safe place.

12


POWER SIDE

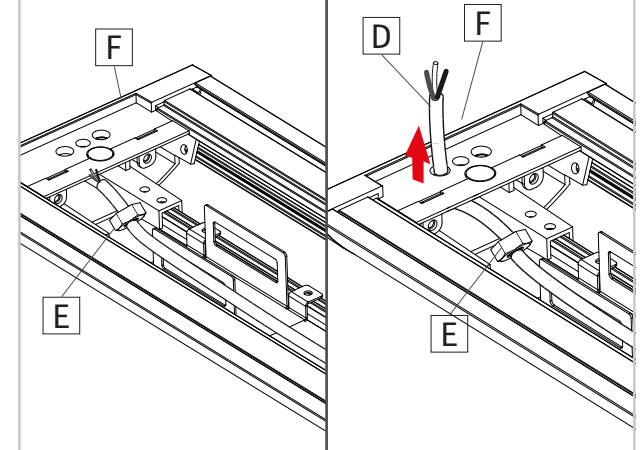


Pass the power cable (D) though the bottom nut (E) and the end cap (F).

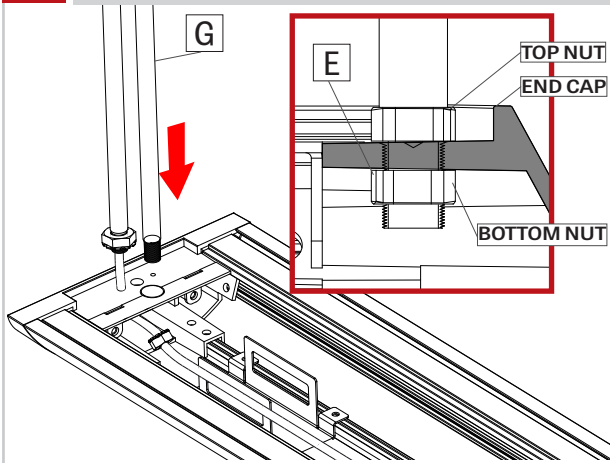13 POWER SIDE


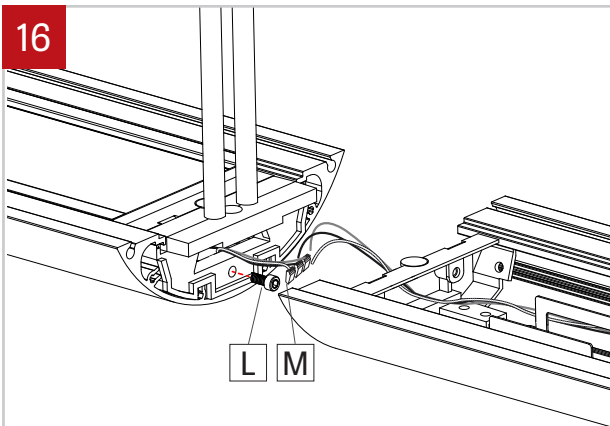
Pass the power cable through the stem. Tighten the Nut (E) to secure the stem. Screw the other stems (G) on the first fixture.

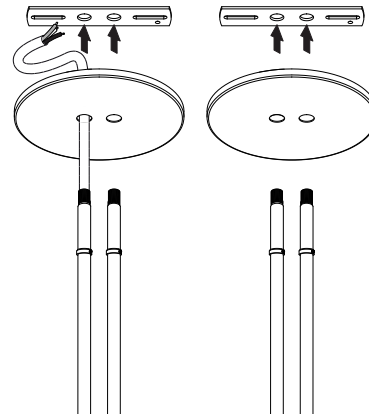14


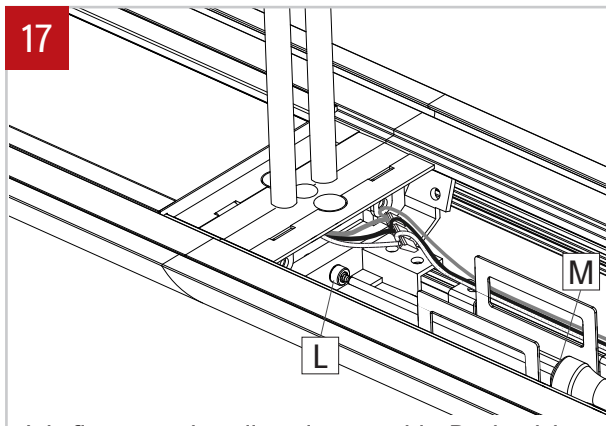
For a continuous system, repeat steps 5 to 7 for all mounting hardware.

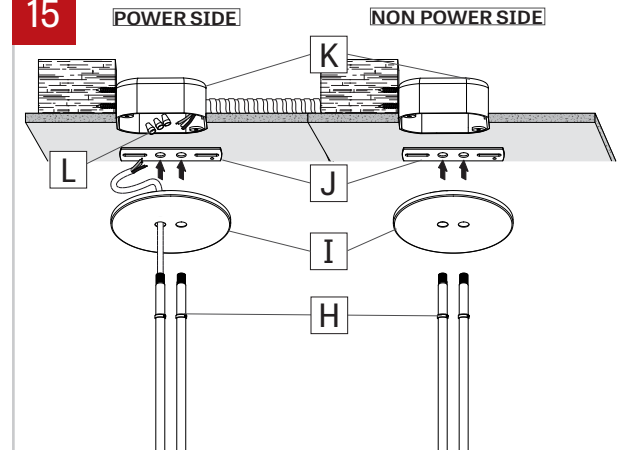15


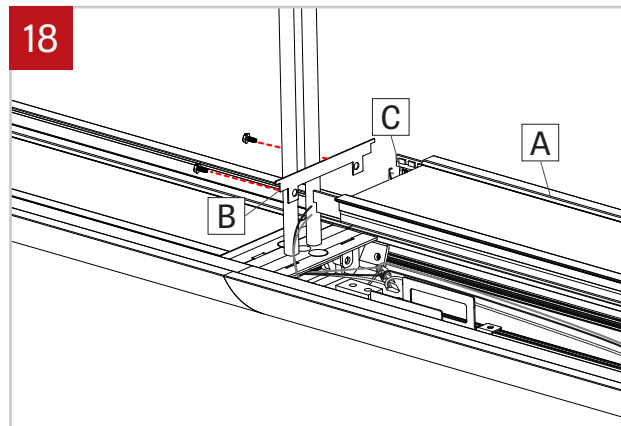
Raise the fixtures and tighten the junction box crossbars (J) with screws (by others) to the junction boxes (K). Make wire connection on the power side with electrical marettes (L). Then slide the canopies (I) and tighten the sets up with the slip rings (H).

16


Remove the screw (L) on the joiner and put it in a safe place. Connect wires between joining fixtures using quick connectors (M). **Number of wires may vary.** Push the wires inside the female fixture.


17


Join fixtures using align pins as guide. Put back in place the provided screw (L) (using 3/16" Ball-End Screwdriver (M) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (L) to pull the extrusions together. Repeat steps 15 to 17 for all others fixtures in the run.

18


Reconnect the LED moxex connectors (C). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not obstructed any LED diode. Screw back the end plate (B) to the cartridge (A). Reinstall the cartridge (A).

19

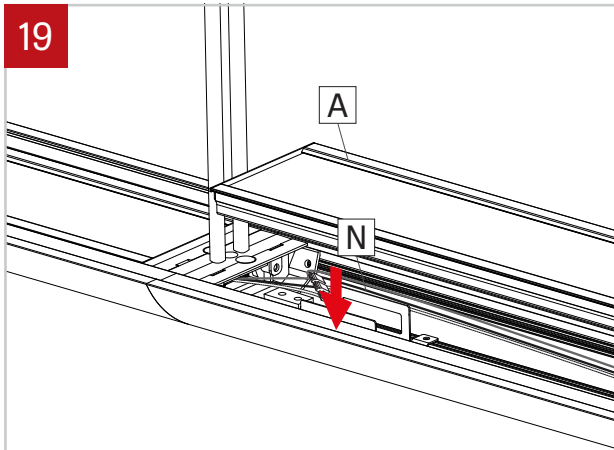

Insert and push the cartridge (A) back in place. Make sure the cartridge's spring are properly placed onto the bracket (N). Make sure not to pinch the wires when placing the cartridge back.