


POP 44 RECESSED SQUARE

LED BOARD REPLACEMENT


NOTE: Wire dimming conductors as Class 1

1

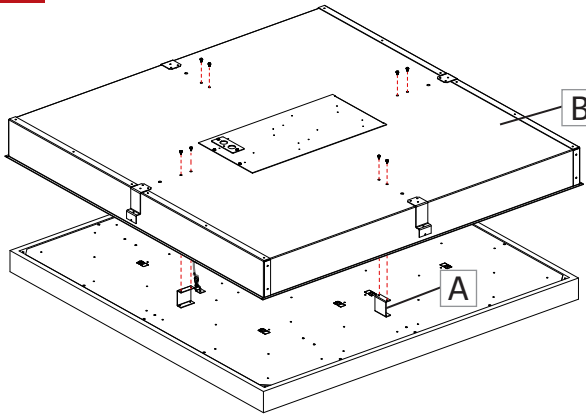


Make sure the power to the fixture is turned off. Unscrew the diffuser's bracket (A) **from the top** of the housing (B). Lower the diffuser from the housing (B) retained by security cable.

2

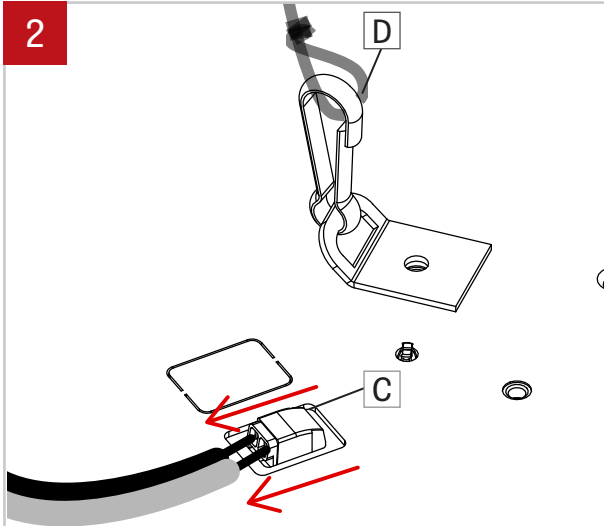


Disconnect wires from molex connector (C) (on LED plate holder) and remove security cable (D).

3

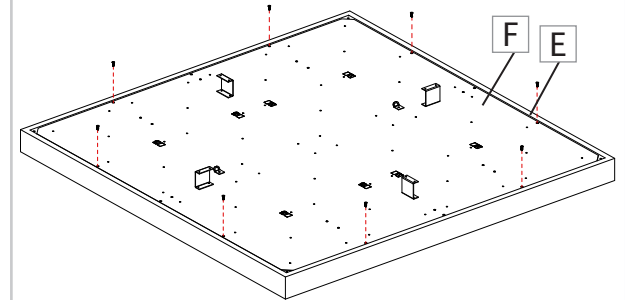


Unscrew the diffuser (E) to separate it from the LED plate (F).

4

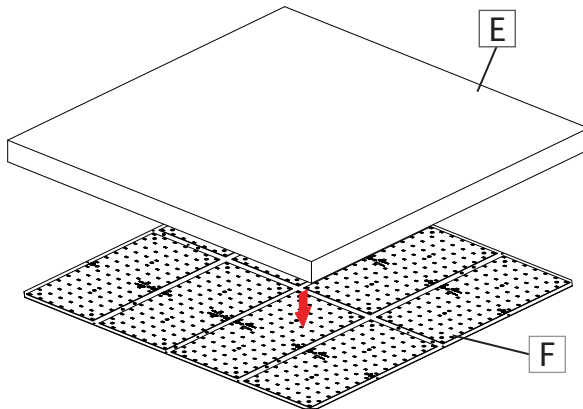


Separate LED plate (F) from the diffuser (E).

5

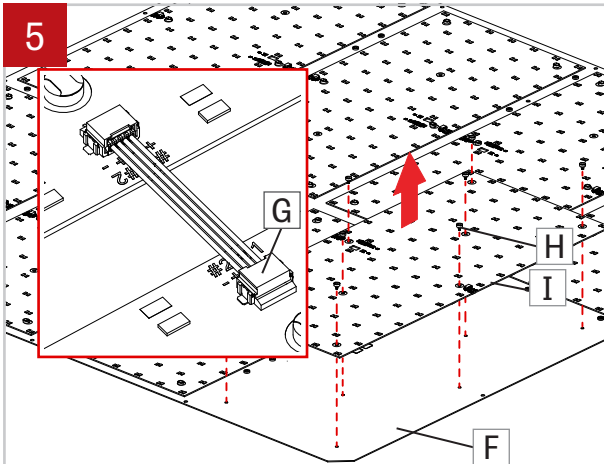

Disconnect quick connectors (G) that are directly connected to the LED board that needs to be replaced. Remove push pins (H) on the LED board (I) to separate it from the LED plate (F).

6

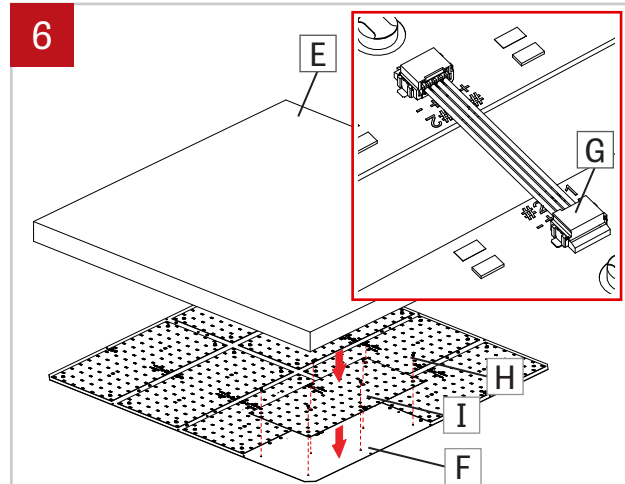


Replace LED board (I) and reinstall it on the LED plate (F). Secure it by putting back provided push pins (H) and reconnect the quick connectors. Put the LEDs back on the diffuser (E).

POP RECESSED SQUARE


LED BOARD REPLACEMENT - INSTRUCTION

7

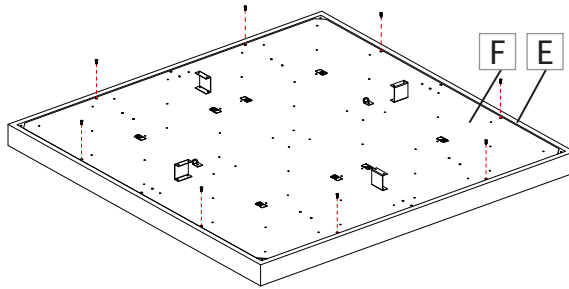

Screw back the LED plate (F) on the diffuser (E).

8

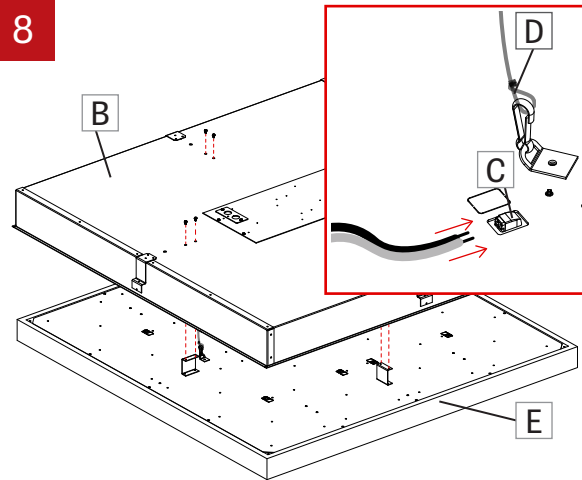

Reinstall security cable (D). Reconnect the wires from the driver to the molex connector (C). Screw the diffuser (E) back to the housing (B).