













Flanged Trim





Pinhole Trimless



Aera recessed downlights are true to size, encased in minimalist housing, and suitable additions to any interior space where outstanding optical performance, maximal eye comfort, and/or an industryleading wall wash are required.

Ceiling Types







Millwork Acoustic Tile

Installation Types

New Construction (Type Non-IC, Type-IC, CCEA) (Type Non-IC)

Plenum Clearance

As low as 5"

Beam Angles



Performance

LUMEN OUTPUT 1	WATTS	EFFICACY
552 lm 727 lm		79 lm/W 73 lm/W

Light Source

Full Spectrum SOLA - Dim-to-Warm DUO - Tunable White



СОВ

2 Step Color Binning Up to 95 CRI

Drivers

1%, 0.1% Dimming Available 0-10V, TRIAC, ELV, Lutron EcoSystem, DALI, DMX Emergency Battery (optional)

Aera Family (Refer to other spec sheets) Downlight





Recessed Adjustable Recessed



Round / Square Recessed Wall Wash



Round / Square Recessed Adjustable



Round / Square



Round / Square Recessed Wall Wash

Cylinder





Pendant Wall Wash

2"/3"/4"/5" Wall



2"/3"/4"/5" Surface Surface Asymmetric Surface Wall Wash





AERA 2" DOWNLIGH



ROUND RECESSED ADJUSTABLE

Project:

Order Guide







For an ENERGY STAR® certified fixture, see page 3. For a Title 24 JA8 compliant fixture, see page 4.

1 - Housing (Example: AE2RRA-TRM-SW-OF-ASB-120V-7W-D1-NA)

LUMINAIRE ID 1	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTION 4
AE2RRA				
AE2RRA - Aera 2" Round Recessed Adjustable	TRM - Flanged trim TLMP - Trimless drywall mudplate TLMW ² - Trimless millwork	SW - Static white FS - Full spectrum SOLA - Dim-to-warm single	OF - Open Frame Type Non-IC IC 3 - Type-IC RM - Remodel Type Non-IC CP 3 - Chicago Plenum Type-IC (CCEA)	ASB ⁵ - Adjustable standard bar hangers FMB ⁵ - Flush mount bars ACB ⁵ - Adjustable commercial bar hangers AHC ⁵ - Adjustable hat channel bars
¹ Recessed (fixed) and Recessed Wall Wash also available. Consult other spec sheets.	² For remodel (RM) installation type, TLMW adapter must be installed from above the ceiling or before ceiling is installed.	channel control DUO - Tunable white 2-channel control	AT 3 - Airtight Type-IC 3 Not available with 8 W output and higher.	NA - None *See page 6 for more details. *Not available with RM installation type.

VOLTAGE	WATTAGE 7	DIMMING 9			OPTION 15
					NA
120V - 120V	7W - 7 W output, up to 560 lm	INTEGRAL	REMOTE ¹¹		NA - None
277V - 277V UNV - 120V-277V 347V ⁶ - 347V ⁶ Available with RD1 driver only, Please consult factory.	Tow 8 - 10 W output, up to 736 Im Lumen outputs are reduced with full spectrum, consult factory. Not available with IC/CP/AT.	D1 - 1% 0-10V ELV ¹⁰ - ELV 120V TRI ¹⁰ - TRIAC 120V ⁹ PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹⁰ Available with 120V only.	RD1 - 1% 0-10V RELV ¹² - ELV 120V RTRI ¹² - TRIAC 120V RLDE1 ¹³ - Lutron Hi-lume 1% Eco ¹¹ A remote driver box is provided, see page ¹² Available with 120V only. ¹³ On-site commissioning is required. ¹⁴ For emergency battery, code will be like	-	To specify an ENERGY STAR certified fixture, see page 3. To specify a JA8 compliant fixture, see page 4.
	SOLA 8 10W - 10 W output, up to 525 Im DUO 8 8W - 8 W output, up to 500 Im	SOLA SDI - Single 0-10V input SELV 10 - ELV 120V STRI 10 - TRIAC 120V	SOLA RSDI - Single 0-10V input RSELV ¹² - ELV 120V RSTRI ¹² - TRIAC 120V	DUO RDMX ¹³ - DMX RDDA ¹³ - DALI DT6 RDDA8 ¹³ - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RLD2 ¹³ - Lutron DALI-2 digital	

2 - Light & Baffle (Example: AE2RRAB-SW-7W-15DEG-2STP-90CRI-27K-LSDL+LS-TRM-CL-FTMW-FTMW-NA)

LUMINAIRE ID	LIGHT SOURCE Specify same as Housing	WATTAGE 16 Specify same as Housing		ВЕАМ		COL	OR QUALITY	CRI	COLOR TEMP.
AE2RRAB - Aera 2" Round Recessed Adjustable Bevel	SW - Static white FS - Full spectrum	7W - 7 W output, up to 10W 17 - 10 W output, u Lumen outputs are reduc spectrum, consult factory	p to 736 lm	25DEG - 3 35DEG - 3 50DEG - 3	35° Narrow flood 50° Wide flood	Mac/	19 - 2 Step Adam Ellipse 1 - 3 Step Adam Ellipse	90CRI ²⁰ - 90 CRI 95CRI - 95 CRI 80CRI ²⁰ - 80 CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K
AE2RRAP - Aera 2" Round Recessed		¹⁷ Not available with IC/CP/A	AT.		80° Very wide flood 90° Open flood		available with pectrum.	full spectrum.	SOLA 30K18K - 3000K to 1800K
Adjustable Pinhole	SOLA - Dim-to-warm single channel control DUO - Tunable white 2-channel control	SOLA ¹⁷ 10W - 10 W output, up DUO ¹⁷ 8W - 8 W output, up to		25DEG - 2 35DEG - 3 60DEG - 9	ble with full spectrum. 25° Spot 35° Narrow flood 60° Wide flood 80° Very wide flood 90° Open flood		- 3 Step Adam Ellipse	90CRI - 90 CRI	27K18K - 2700K to 1800K DUO 65K27K - 6500K to 2700K 50K27K - 5000K to 2700K
ACCESSORIES * See page 7 for details	5	TRIM STYLE Specify same as Housing	LENS * See page 7 fo	or details	BAFFLE FINISH Specify NA for Pinhole	e	TRIM FLANC Specify NA for E		OPTION ²⁶
for SOLA/DUO) LSDL - Soft diffuse LFDL - Frosted dif LS - Linear spread HEX ²³ - Hex louve NA - None ²³ Separate codes with specified, e.g. LSDL+	as for SW/FS and 1 option and lens, Solite fused lens r a "+" if more than one is LS. not be combined. LS and	TRM - Flanged trim TLMP - Trimless drywall mudplate TLMW ²⁴ - Trimless millwork ²⁴ For remodel (RM) installation type, TLMW adapter must be installed from above the ceiling or before ceiling is installed.	At baffle (choose I opt Specify NOL I SDL - Soft of lens, Solite FDL - Frost diffused ler CL - Clear I NOL - No le	or Pinhole diffused ed ns ens	FTMW - Textured r white FTMB - Textured m black FSPC - Specular FSSPC - Semi-spec FCHP - Champagr CF# - Custom finis specify RAL# NA - Not applicable	cular ne h,	FTMB - Textur FSPC - Specu FSSPC - Semi FCHP - Cham CF# - Custom NA - Not appl	i-specular ipagne in finish, specify RAL#	WET ²⁷ - Wet location NA - None 26 To specify an ENERGY STAR certified fixture, see page 3. 17 ospecify a JAB compliant fixture, see page 4. 27 Must be specified with the bevel (AEZRRAB), flanged trim (TRM), and either SDL, FDL, or CL lens options.

^{*} LSDL or LFDL at light element cannot be combined with SDL or FDL at baffle.



T (514) 225-4304

© Lumenwerx, ULC. All rights reserved.



AERA 2" DOWNLIGHT

Lum	en	we	rx

ROUND RECESSED ADJUSTABLE

ENERGY STAR

Project:	
Туре:	

Order Guide

1 - Housing (Example: AE2RRA-TRM-SW-OF-ASB-120V-7W-D1-ES)



LUMINAIRE ID 1	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTION ²
AE2RRA		sw		
AE2RRA - Aera 2" Round Recessed Adjustable ¹Recessed (fixed) and Recessed Wall Wash also available. Consult other spec sheets.	TRM - Flanged trim TLMP - Trimless drywall mudplate TLMW - Trimless millwork	SW - Static white	OF - Open Frame Type Non-IC IC - Type-IC RM - Remodel Type Non-IC CP - Chicago Plenum Type-IC (CCEA) AT - Airtight Type-IC	ASB - Adjustable standard bar hangers FMB - Flush mount bars ACB - Adjustable commercial bar hangers AHC - Adjustable hat channel bars NA - None 2 See page 6 for more details.

VOLTAGE	WATTAGE	DIMMING		OPTION
	7W			ES
120V - 120V	7W - 7 W output, up to 560 lm	INTEGRAL	REMOTE 4	ES - ENERGY STAR
277V - 277V UNV - 120V-277V		D1 - 1% 0-10V ELV ³ - ELV 120V	RD1 - 1% 0-10V RELV ⁵ - ELV 120V	
		TRI ³ - TRIAC 120V	RTRI ⁵ - TRIAC 120V RLDE1 ⁶ - Lutron Hi-lume 1% Eco	
		³ Available with 120V only.	A remote driver box is provided, see page 5 for details. Available with 120V only. On-site commissioning is required.	

2 - Light & Baffle (Example: AE2RRAB-SW-7W-15DEG-2STP-90CRI-27K-NA-TRM-SDL-FTMW-FTMW-ES)

3		1		. —	/	
LUMINAIRE ID	LIGHT SOURCE Specify same as Housing	WATTAGE Specify same as Housing	ВЕАМ	COLOR QUALITY	CRI	COLOR TEMP.
	sw	7W		2STP		
AE2RRAB - Aera 2" Round Recessed Adjustable Bevel AE2RRAP - Aera 2" Round Recessed Adjustable Pinhole	SW - Static white	7W - 7 W output, up to 560 lm	15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood	2STP - 2 Step MacAdam Ellipse	90CRI - 90 CRI 80CRI - 80 CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K

ACCESSORY	TRIM STYLE Specify same as Housing	LENS See page 7 for details	BAFFLE FINISH Specify NA for Pinhole	TRIM FLANGE FINISH ⁷ Specify NA for Bevel Trimless	OPTIONS
NA					ES
At light element	TRM - Flanged trim TLMP - Trimless	At baffle Specify NOL for Pinhole	FTMW - Textured matte white FTMB - Textured matte black	FTMW - Textured matte white FTMB - Textured matte black	ES - ENERGY STAR WET ^{8,9} - Wet location
NA - Not applicable	drywall mudplate TLMW - Trimless millwork	SDL - Soft diffused lens, Solite FDL - Frosted diffused lens CL - Clear lens NOL - No lens	FSPC - Specular FSSPC - Semi-specular FCHP - Champagne CF# - Custom finish, specify RAL# NA - Not applicable	FSPC - Specular FSSPC - Semi-specular FCHP - Champagne CF# - Custom finish, specify RAL# NA - Not applicable ⁷ A trim flange finish option must be specified for pinhole. See page 7 for details.	Must be specified with the bevel (AEZRRAB), flanged trim (TRM), and either SDL, FDL, or CL lens options. To specify the WET option, the code will be ES+WET.

AERA 2" DOWNLIGHT

.	
Lumenwerx	

ROUND RECESSED ADJUSTABLE
Title 24 JA8

Project:	
Туре:	

Order Guide

1 - Housing (Example: AE2RRA-TRM-SW-AT-ASB-120V-7W-D1-JA8)



LUMINAIRE ID 1	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTION ²
AE2RRA			AT	
AE2RRA - Aera 2" Round Recessed Adjustable ¹Recessed (fixed) and Recessed Wall Wash also available. Consult other spec sheets.	TRM - Flanged trim TLMP - Trimless drywall mudplate TLMW - Trimless millwork	SW - Static white SOLA - Dim-to-warm single channel control	AT - Airtight Type-IC	ASB - Adjustable standard bar hangers FMB - Flush mount bars ACB - Adjustable commercial bar hangers AHC - Adjustable hat channel bars NA - None 2 See page 6 for more details.

VOLTAGE	WATTAGE	DIMMING		OPTION
				JA8
120V - 120V	7W - 7 W output, up to 560 lm	INTEGRAL	REMOTE 4	JA8 - JA8 compliant
277V - 277V		D1 - 1% 0-10V ELV 3 - ELV 120V TRI 3 - TRIAC 120V 3 Available with 120V only.	RD1 - 1% 0-10V RELV 5 - ELV 120V RTRI 5 - TRIAC 120V RLDE1 6 - Lutron Hi-lume 1% Eco A remote driver box is provided, see page 5 for details. Savailable with 120V only. Con-site commissioning is required.	
	8W - 8 W output, up to 250 lm	SD1 - Single 0-10V input SELV ³ - ELV 120V STRI ³ - TRIAC 120V	RSD1 - Single 0-10V input RSELV ⁵ - ELV 120V RSTRI ⁵ - TRIAC 120V	

2 - Light & Baffle (Example: AE2RRAB-SW-7W-15DEG-2STP-90CRI-27K-NA-TRM-SDL-FTMW-FTMW-JA8+WET)

		<u> </u>						
LUMINAIRE ID	LIGHT SOURCE Specify same as Housing	WATTAGE Specify same as Housing	BEAM	COLOR QUALITY	CRI	COLOR TEMP.		
					90CRI			
AE2RRAB - Aera 2" Round Recessed Adjustable Bevel AE2RRAP - Aera 2" Round Recessed Adjustable Pinhole	SW - Static white	7W - 7 W output, up to 560 lm	15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood 80DEG - 80° Very wide flood 90DEG - 90° Open flood	2STP - 2 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse	90CRI - 90 CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K		
	SOLA - Dim-to-warm single channel control	8W - 8 W output, up to 250 lm	50DEG - 50° Wide flood	3STP - 3 Step MacAdam Ellipse		SOLA? - Dim-to-warm single channel control		


ACCESSORY * See page 7 for details	TRIM STYLE Specify same as Housing	LENS * See page 7 for details	BAFFLE FINISH Specify NA for Pinhole	TRIM FLANGE FINISH ⁸ Specify NA for Bevel Trimless	OPTIONS		
					JA8		
At light element	TRM - Flanged trim TLMP - Trimless	At baffle Specify NOL for Pinhole	FTMW - Textured matte white FTMB - Textured matte black	FTMW - Textured matte white FTMB - Textured matte black	JA8 - JA8 compliant WET ^{9, 10} - Wet location		
LSDL - Soft diffused lens, Solite LFDL - Frosted diffused lens NA - None	drywall mudplate TLMW - Trimless millwork	SDL - Soft diffused lens, Solite FDL - Frosted diffused lens CL - Clear lens NOL - No lens	FSPC - Specular FSSPC - Semi-specular FCHP - Champagne CF# - Custom finish, specify RAL# NA - Not applicable	FSPC - Specular FSSPC - Semi-specular FCHP - Champagne CF# - Custom finish, specify RAL# NA - Not applicable	⁹ Must be specified with the bevel (AEZRRAB), flanged trim (TRM), and either SDL, FDL, or CL lens options. ¹⁰ To specify the WET option, the code will be JA8+WET.		
				⁸ A trim flange finish option must be specified for pinhole. See page 7 for details.			


^{*} LSDL or LFDL at light element cannot be combined with SDL or FDL at baffle. For SOLA, one of the following lenses must be specified: SDL, FDL, LSDL, or LFDL.






Housing

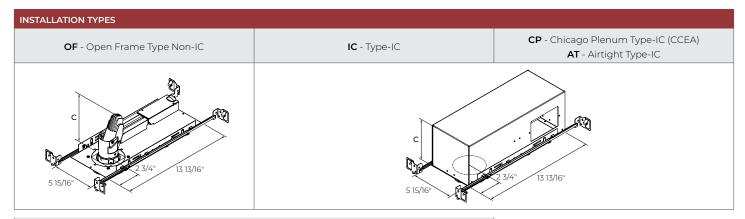


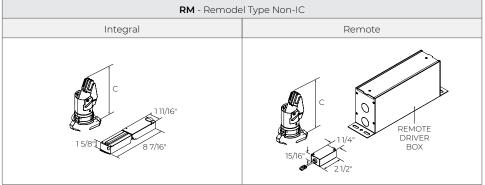

- For height dimension C, see the PLENUM CLEARANCE & CUT-OUT DIMENSIONS table below.
- For OF, IC, CP, and AT installation types with remote dimming, a remote driver box is provided.


REMOTE DRIVER BOX





	RDB8	RDB18	RDB24	RDB24W
Α	10"	20"	26"	26"
В	8"	18"	24"	24"
DRIVER	RDI - 1% 0-10V RELV - ELV 120V RTRI - TRIAC 120V	RLDE1 - Lutron Hi-lume 1% Eco RDA - DALI RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED	Emergency battery (+EB) with the following driver options. RD1+EB - 1% 0-10V RELV+EB - ELV 120V RTRI+EB - TRIAC 120V	Emergency battery (+EB) with the following driver options. RLDE1+EB - Lutron Hi- lume 1% Eco RDA+EB - DALI
	SOLA RSD1 - Single 0-10V input RSELV - ELV 120V RSTRI - TRIAC 120V	0.1% SOLOdrive 0-10V	DUO RDMX - DMX RDDA - DALI DT6 RDDA8 - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RLD2 - Lutron DALI-2	RELDI+EB - eldoLED 1% ECOdrive 0-10V RELD0+EB - eldoLED 0.1% SOLOdrive 0-10V

PLENUM CLEARANCE & CUT-OUT DIMENSIONS







	ı	PLENUM CLEA	RANCE HEIGHT	Г									
		REMOTE & INTEGRAL											
	OF	IC	CP/AT	RM									
С	5"	5 1/8"	5 1/8"	5"									

		CUT-OUT DIMENSIONS
D	TRM/TLMP	Ø 2 1/2"
E	TINAN	Ø 2 1/2"
F	TLMW	Ø 2 1/16" with 1/8" lip

	MAXIMUM CEILING THICKNESS TRM/TLMP 1"								
	TRM/TLMP	1"							
G	TLMW	5/8"							




digital



Housing


MOUNTING OPTIONS

ASB - Adjustable Standard Bar Hangers




Adjustable Standard Bar hangers can be used in both commercial and residential applications and are adjustable to various heights in both Grid Ceiling and Drywall mounting. ASB hangers are less rigid and versatile than ACB hangers.

FMB - Flush Mount Bars

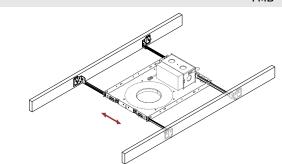

Flush Mount Bars are best used in residential applications, fitting snug to the surface and suitable for Wood, Metal, and Drywall mounting. The flush mounted bars are static and can't be adjusted.


ACB - Adjustable Commercial Bar Hangers

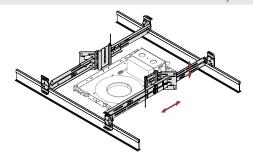

Adjustable Commercial Bar hangers can be used in both commercial and residential applications and are by far the most versatile mounting bar we offer with its adjustability to various heights. ACB hangers are suitable for Grid Ceiling, Drywall, Metal, Wood and Frame mounting.

- · Extremely rigid
- · Fits into C-Channel notches in a Butterfly Bracket


AHC - Adjustable Hat Channel Bars

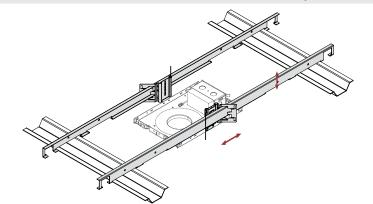

Adjustable Hat Channel bars can be used in both commercial and residential applications and come with a butterfly clip to adjust to various heights. AHC bars can be hung downward by 90 degrees in vertical position, and once wired, can be shifted onto the horizontal mounting plane. AHC bars are suitable for both Drywall and wood ceiling applications.



Light & Baffle

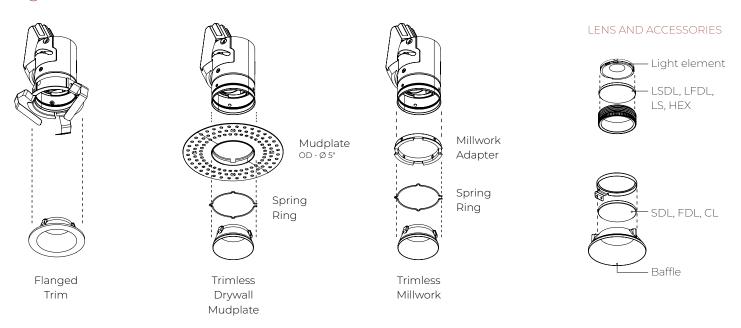


Be	vel	Pinl	nole
TRM Flanged Trim	TLMP/TLMW Trimless Drywall Mudplate /Trimless Millwork	TRM Flanged Trim	TLMP/TLMW Trimless Drywall Mudplate /Trimless Millwork
Baffle finish Trim flange finish		Trim flange finish Textured matte black	
Ø 2 13/16"	Ø 2 1/16" Ø 1 3/8" Lens	Ø 2 13/16" Ø 11/4" Aperture	Ø 2 1/16"
7/8" Cut-off 7/1° / Shielding	7/8" Cut-off Shielding	Optic 7/8" 1/16" Cut-off	Optic 7/8" 47° Cut-off



Color Quality


TM-30 Rf 91 TM-30 Rg 100 CRI 90 R9 > 50





Photometrics


STATIC WHITE


Values calculated based on 3500K, bevel baffle, and SDL lens option.














Delivered lumens

CRI	90 CRI					95 CRI						80 CRI						
BEAM	15°	25°	35°	50°	80°	90°	15°	25°	35°	50°	80°	90°	15°	25°	35°	50°	80°	90°
7 W	479	523	516	495	446	446	369	403	397	381	343	343	513	560	552	530	477	477
10 W	629	688	679	651	586	586	484	530	523	501	451	451	673	736	727	697	627	627

Efficacy

CRI	90 CRI						95 CRI						80 CRI					
BEAM	15°	25°	35°	50°	80°	90°	15°	25°	35°	50°	80°	90°	15°	25°	35°	50°	80°	90°
7 W	68	75	74	71	64	64	53	58	57	54	49	49	73	80	79	76	68	68
10 W	63	69	68	65	59	59	48	53	52	50	45	45	67	74	73	70	63	63

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, baffle styles, baffle colors, lensing and accessories will change the lumen value.

ССТ	
2700K	0.9
3000K	0.95
3500K	1
4000K	1.05

BAFFLE STYLE AND COLOR						
Flanged trim	1					
Trimless	1					
Bevel	1					
Wet bevel	1					
Pinhole	0.92					
White	1					
Black	1					

LENS* (At baffle)					
SDL - Soft diffused lens, Solit	te 1				
FDL - Frosted lens	0.8				
CL - Clear lens	1.1				
NOL - No lens	1.1				

ACCESSORIES * (At light element)						
LSDL - Soft diffused lens, Solite	1					
LFDL - Frosted lens	0.8					
LS - Linear spread	0.84					
HEX - Hex louver	0.86					

^{*} When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory. e.g. NOL + LSDL + LS = 1.1 x 1 x 0.84 = 0.924








Photometrics


SOLA/DUO


Values calculated based on bevel baffle and SDL lens option.











SOLA

BEAM		25°		35°		60°		80°		90°	
		lm	lm/W								
10 W	3000K	495	50	525	53	485	49	415	42	380	38
10 00	2700K	495	50	525	53	485	49	415	42	380	38

DUO

BEAM		25°		35°		60°		80°		90°	
		lm	lm/W								
	6500K	500	63	485	61	440	55	380	48	350	44
8 W	5000K	500	63	485	61	440	55	380	48	350	44
	2700K	430	54	420	53	355	44	305	38	280	35

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, baffle styles, baffle colors, lensing and accessories will change the lumen value.

BAFFLE STYLE AND COLOR						
Flanged trim	1					
Trimless	1					
Bevel	1					
Wet bevel	1					
Pinhole	0.92					
White	1					
Black	1					

LENS* (At baffle)					
SDL - Soft diffused lens, Solite	1				
FDL - Frosted lens	0.8				
CL - Clear lens	1.1				
NOL - No lens	1.1				

ACCESSORIES * (At light element)						
LSDL - Soft diffused lens, Solite	1					
LFDL - Frosted lens	0.8					
LS - Linear spread	0.84					
HEX - Hex louver	0.86					


^{*} When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory. e.g. NOL + LSDL = 1.1 x 1 = 1.1



Technical Specifications

OPTIC

XPoint™ Refraction Technology optics provide precise optical control in a remarkably compact form. Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.



LIGHT SOURCE

Static white

Compact COB (Chip-On-Board) LED module, available in 2700K, 3000K, 3500K and 4000K with a choice of 80 CRI, 90 CRI, or 95 CRI, with elevated R9 value for 90 CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum

The full spectrum LED option offers improved color particularly in the cyan region which helps increase Cyanosis Observation Index (COI) and assist in regulating circadian rhythms. The cyan region in full spectrum LED is richer at the 480 nm range.

Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. Two color temperature range options are offered: 3000K to 1800K, and 2700K to 1800K. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool to warm LED arrays - maintaining a CRI above 90. Two color temperature range options are offered: 6500K to 2700K, and 5000K to 2700K. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency>84%, PF>0.9, THD<20%.

Integral: 0-10V, ELV, TRIAC

Remote: 0-10V, ELV, TRIAC, Lutron Hi-Lume 1% EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron DALI-2 digital

Emergency battery options: Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-lon battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10 W, the battery provides 6 W of emergency light output. For fixtures 10 W and over, the battery provides 10 W.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing

For new construction, 20 gauge powder coated steel. Open frame, type-IC, or Chicago Plenum (CCEA) rated. 18 gauge galvanized steel junction box with ½" trade size knockouts. Adjustable hanger bars and butterfly brackets are included. Adjustable commercial hat channel and flush mounted brackets are also available.





Light element

Adjustability: Hot aiming, 355° rotation and 35° vertical tilt with shift to ensure beam stays centered.

LED module: Integral COB module. 90 CRI and 2 SDCM, Standard

with options of 80 CRI, or 95 CRI. L80 > 60,000 hours.

XPoint™ Refraction Technology optic: Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.

Thermal management: Die-cast aluminum heat sink to maximize thermal dissipation.

Baffle: Die-cast aluminum mounted with retaining spring clips **Trim style**: Trimmed and trimless with mudplate or millwork adapter

WEIGHT

Open frame: 4.0 lbs - 1.8 kg **Type-IC**: 6.5 lbs - 2.9 kg

Chicago Plenum: 6.5 lbs - 2.9 kg Remodel: 2.25 lbs - 1.0 kg

LENS AND ACCESSORIES







Frosted diffused lens



Clear lens



Linear spread



Hex louver

ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0. IP44: IP44 rated for bathrooms, showers, outdoor canopies, and marquees when specified with the wet location (WET) option. Chicago Plenum: City of Chicago approved (CCEA) when

specified with CP installation type option.

IC rated: Suitable for direct contact with insulation when specified with IC, CP or AT installation type options.

ENERGY STAR: ENERGY STAR certified

Title 24 JA8: California Building Standards Code

Declare: LBC Red List Approved

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

