


IMPORTANT: Installation instructions are shown with Pop Round and applies to all Pop Round and Pop Square fixtures


NOTE: Wire dimming conductors as Class 1

1 INDIRECT LED BOARD

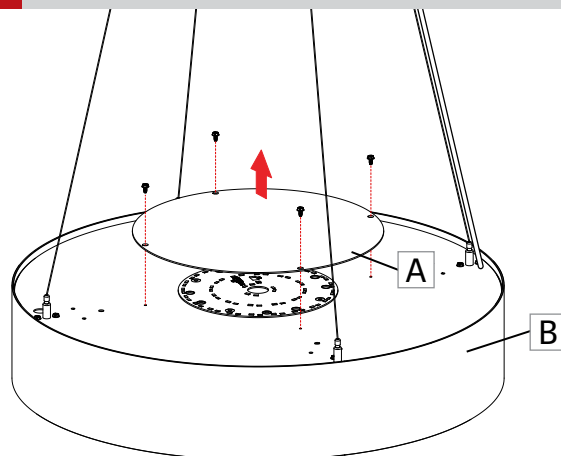


Make sure the power to the fixture is turned off. Unscrew and remove the dust cover (A) on the fixture (B).

2

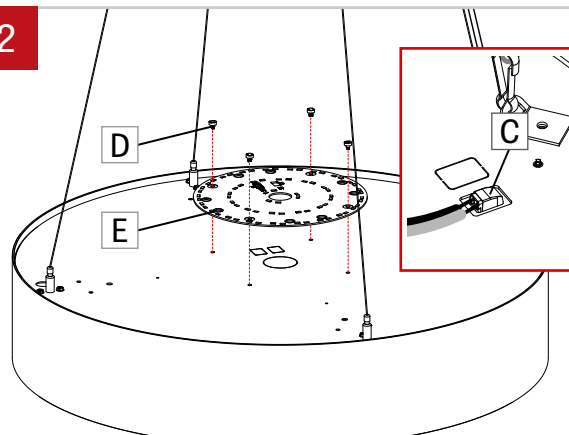


Disconnect wires from molex connector (C). Remove push pins (D) on the LED board (E) to separate it from the plate. Replace LED board (E) and secure it by using provided push pins (D). Reconnect wires from the driver to the molex connector (C).

3

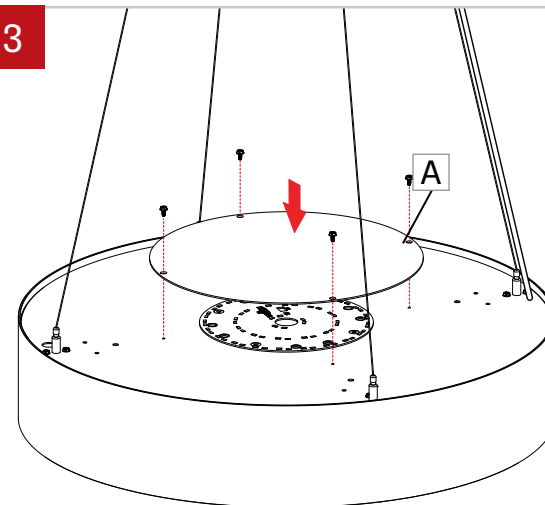


Screw back in place the dust cover (A).

4 DIRECT LED BOARD - FLUSH & REGRESSED

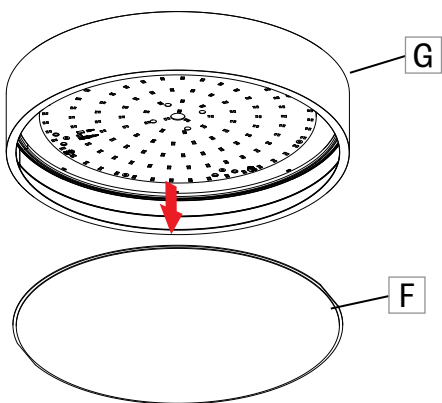


Push the lens (F) up and guide it out of the housing (G).

5

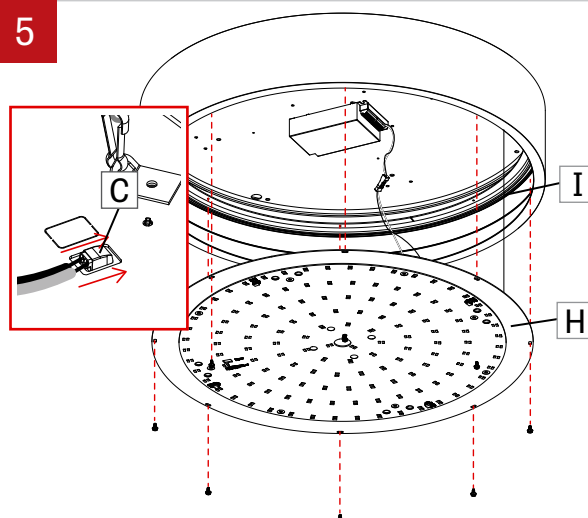


Unscrew the LED plate holder (H) and disconnect wires from molex connector (C) (on LED plate (H)). Remove security cable (I).

6

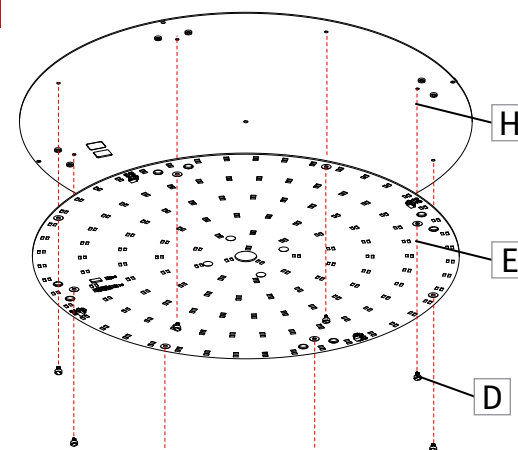


Remove push pins (D) on the LED board (E) to separate it from the LED holder (H). Replace LED board (E) and reinstall it on the LED plate (H). Secure it by using provided push pins (D).

7

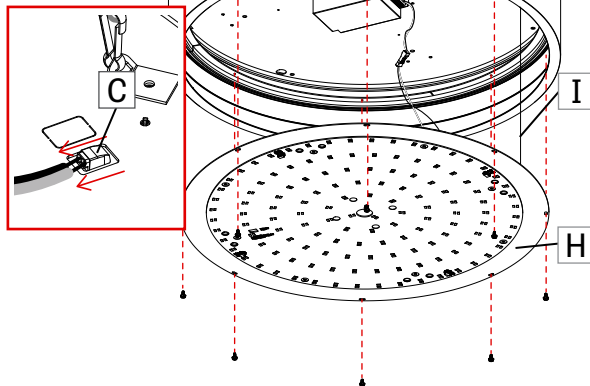

Attach security cable (I). Reconnect the wires from the driver to the molex connector (C) (on the LED plate). Screw the LED plate holder (H) back in place.


8

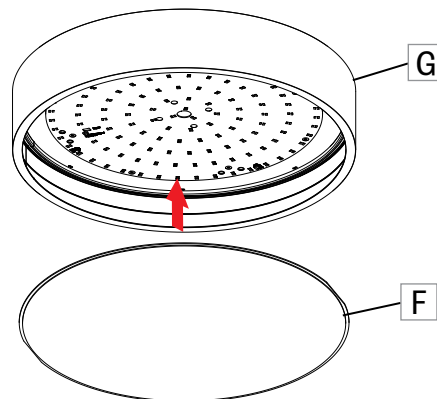

Align and tilt the lens (F) to insert it back into the housing (G).


9

DIRECT LED BOARD - DROP

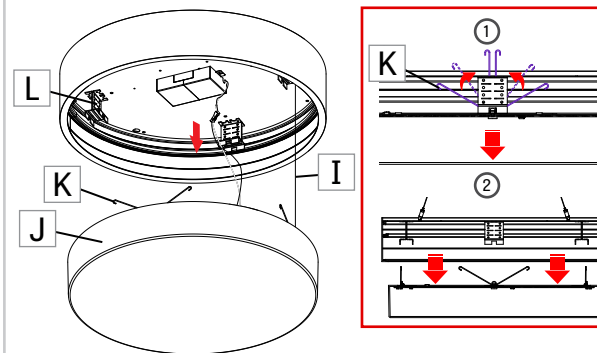


Pull down the diffuser (J) to get access to the springs (K). Squeeze the springs (K) to release them from the brackets (L). Once all the springs (K) have been released, slowly lower the diffuser (J) retained by security cable (I).

10

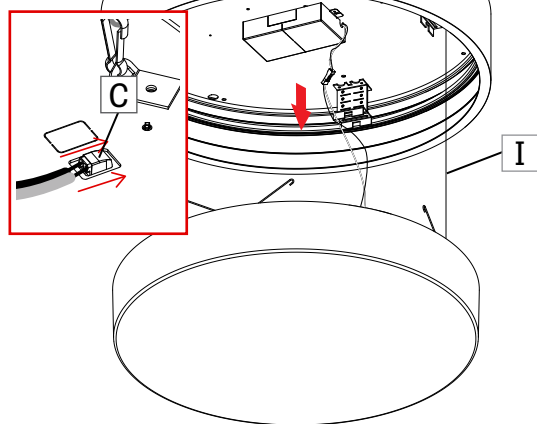


Disconnect wires from molex connector (C) (on LED plate) and remove security cable (I).

11

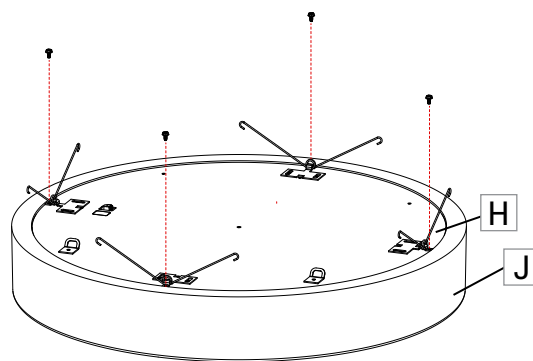


Unscrew the diffuser (J) to separate it from the LED plate (H).

12

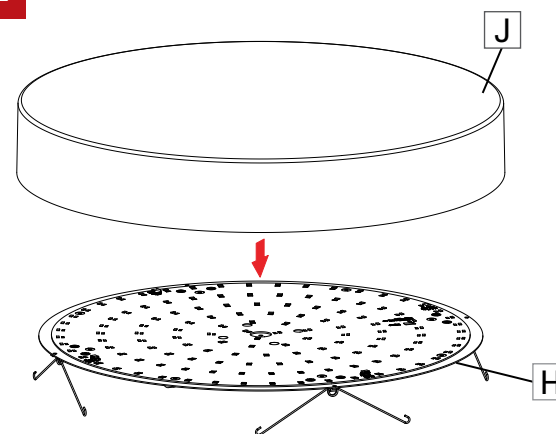


Separate LED plate (H) from the diffuser (J).

13

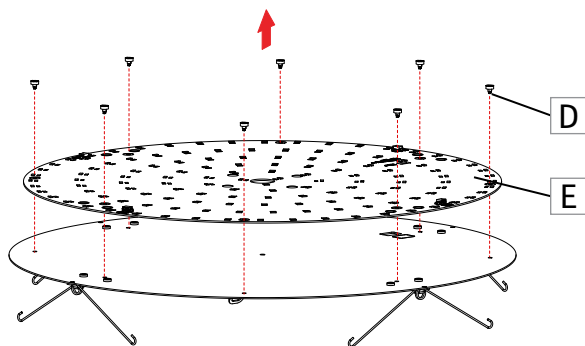


Remove push pins (D) on the LED board (E) to separate it from the LED holder.

14

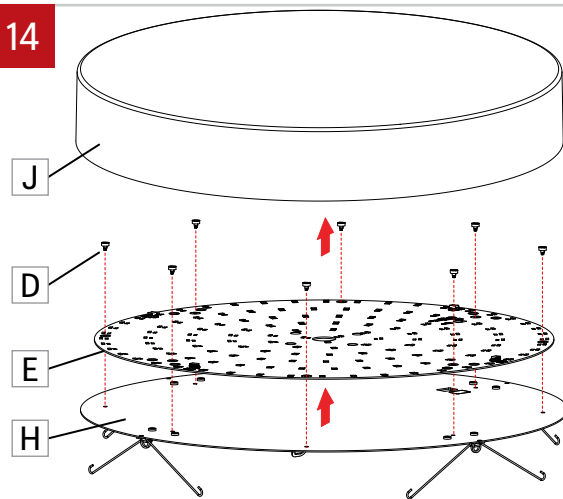


Replace LED board (E) and reinstall it on the LED plate (H). Secure it by using provided push pins (D). Place LEDs on the diffuser (J).

15

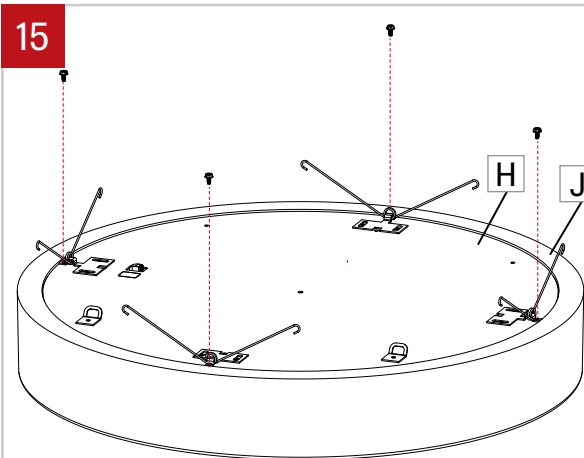


Screw the LED plate (H) on the diffuser (J).

16

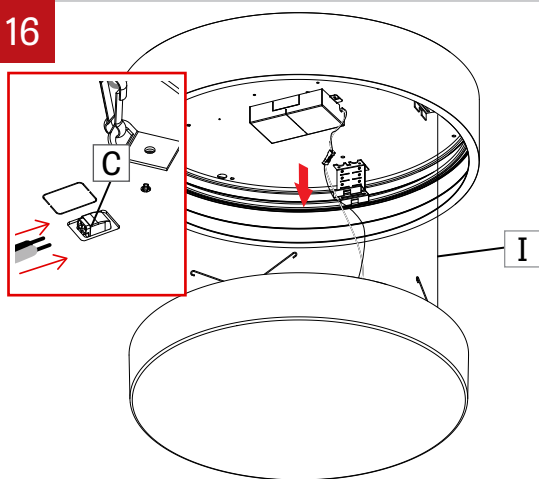

Reinstall security cable (I). Reconnect the wires from the driver to the moxex connector (C) (on the LED plate).

17

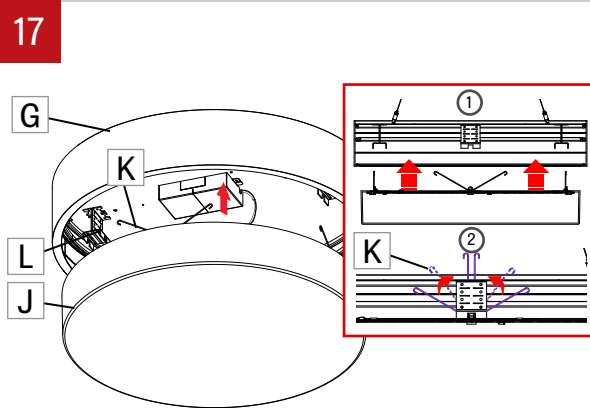

Squeeze, align and insert the springs (K) into the brackets (L) that are further inside the housing. Once all the springs (K) are properly installed, slowly push the diffuser (J) in the housing (G) as far as the brackets (L) allow.