


POP COLOR SQUARE 11 & 22

SURFACE - WALL - INSTRUCTIONS


NOTE: Wire dimming conductors as Class 1

1 FLUSH & REGRESSED

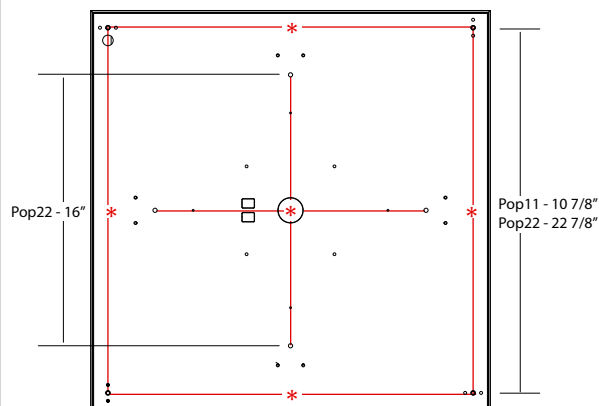


Locate mounting points [*] on the ceiling according to the client drawings.

2

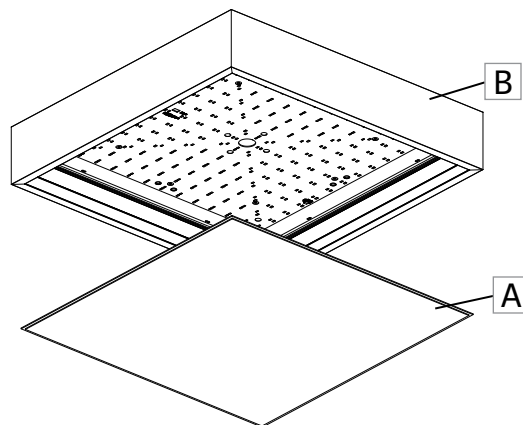


Push the lens (A) up and guide it out of the housing (B).

3

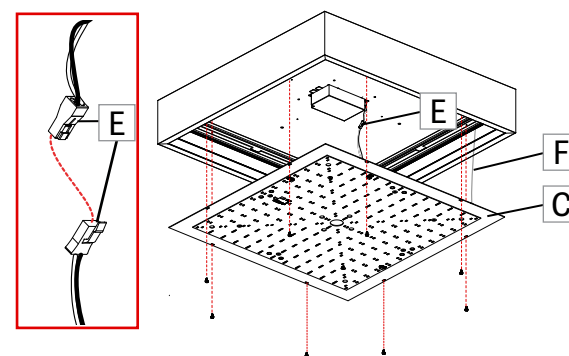


Unscrew the LED plate holder (C) to get access to the driver. Disconnect quick connectors (E) between driver and LED board. Remove security cable (F).

4

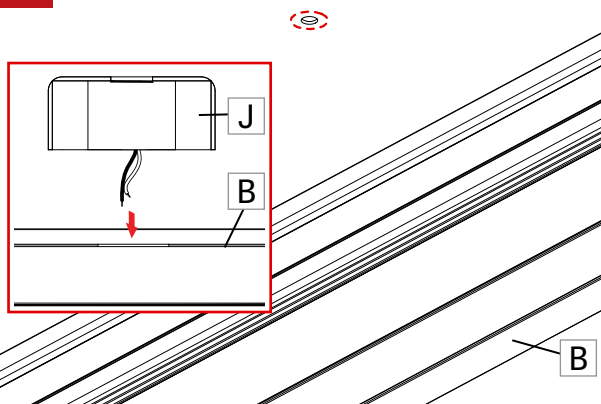


Pass the power wires from the junction box (J) through the hole in the housing (B). Then install the housing (B) on ceiling centered on the junction box according to the dimensions given in the client drawings. Screw the housing (B) to attach it.

5

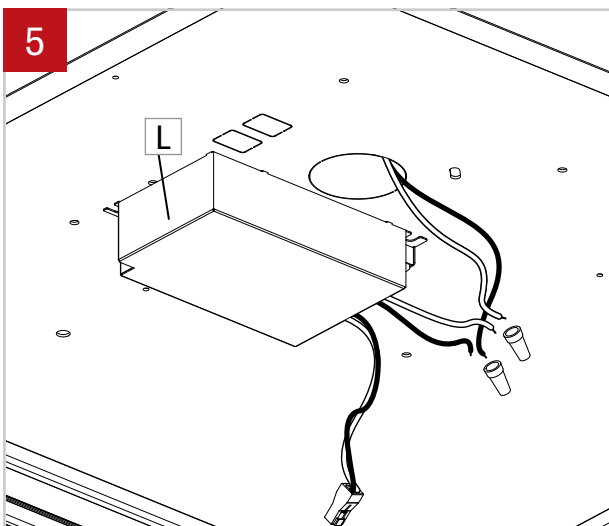

Make electrical connection between driver (L) and power wires from the junction box.

6

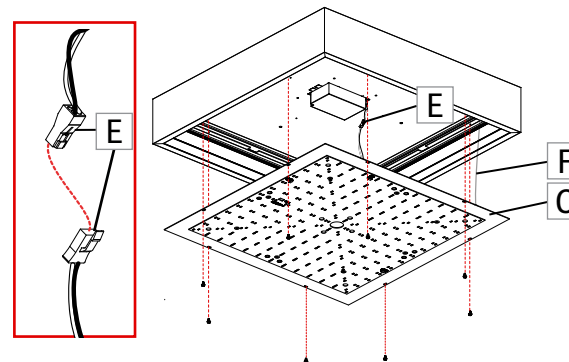


Attach security cable (F). Make wires connection between the driver and the LED board by connecting quick connectors (E). Screw the LED plate holder (C) back in place.

POP COLOR SQUARE 11 & 22

SURFACE - WALL - INSTRUCTIONS

7

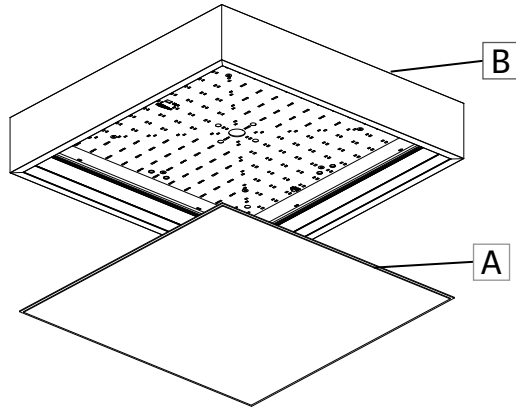


Align and tilt the lens (A) to insert it back into the housing (B).

POP COLOR SQUARE 11 & 22

SURFACE - WALL - INSTRUCTIONS


NOTE: Wire dimming conductors as Class 1

1 DROP

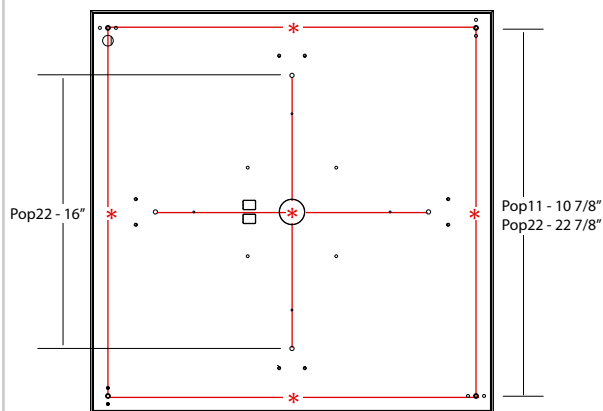


Locate mounting points [*] on the ceiling according to the client drawings.

2

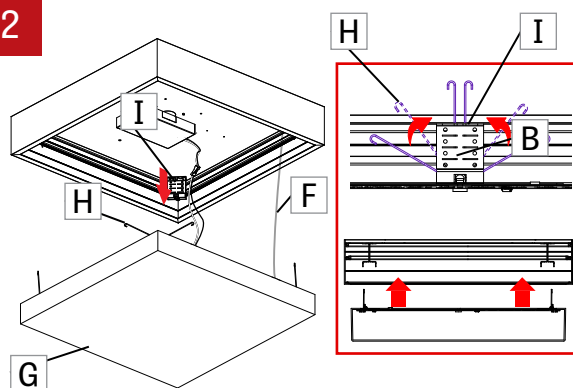


Pull down the diffuser (G) to get access to the springs (H). Squeeze the springs (H) to release them from the brackets (I) (at each corner of the housing). Once all the springs (H) have been released, slowly lower the diffuser (G) retained by security cable (F).

3

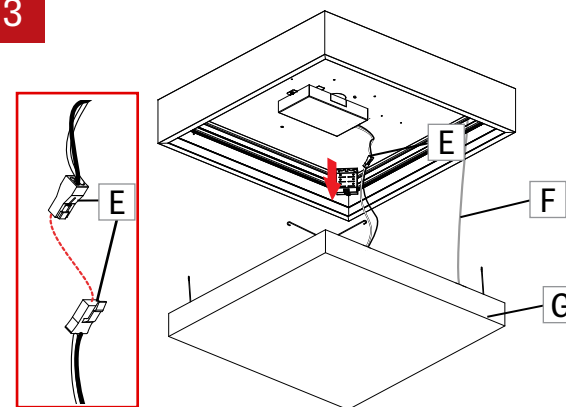


Disconnect quick connectors (E) between driver and diffuser (G). Remove security cable (F).

4

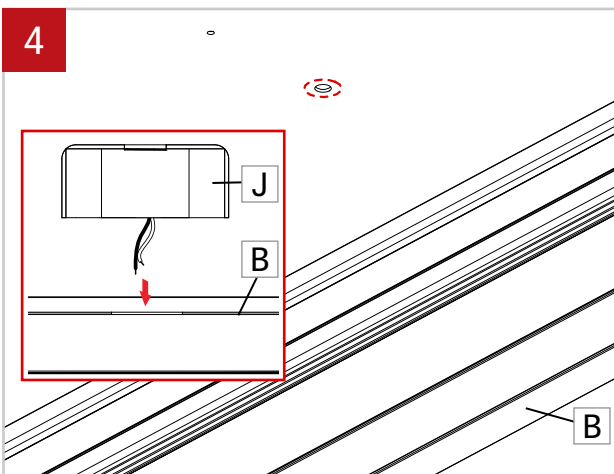


Pass the power wires from the junction box (J) through the hole in the housing (B). Then install the housing (B) on ceiling centered on the junction box according to the dimensions given in the client drawings. Screw the housing (B) to attach it.

5

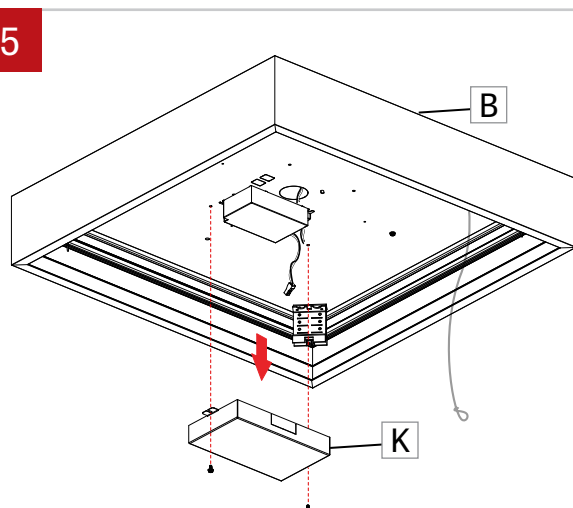

Remove driver box (K) from the housing (B).

6

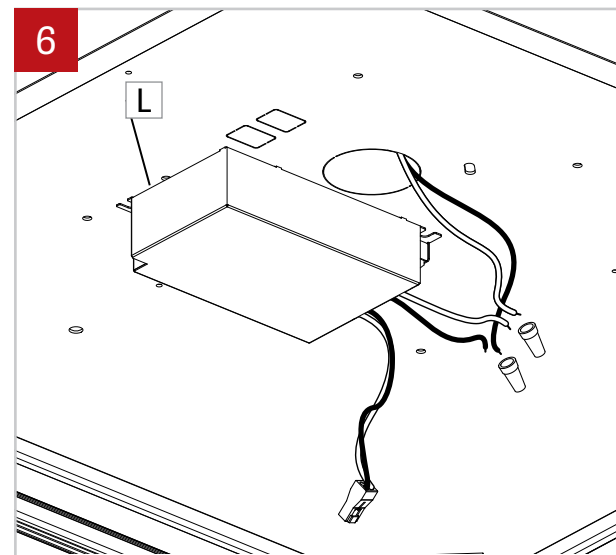


Make electrical connection between driver (L) and power wires from junction box.

POP COLOR SQUARE 11 & 22


SURFACE - WALL - INSTRUCTIONS

7

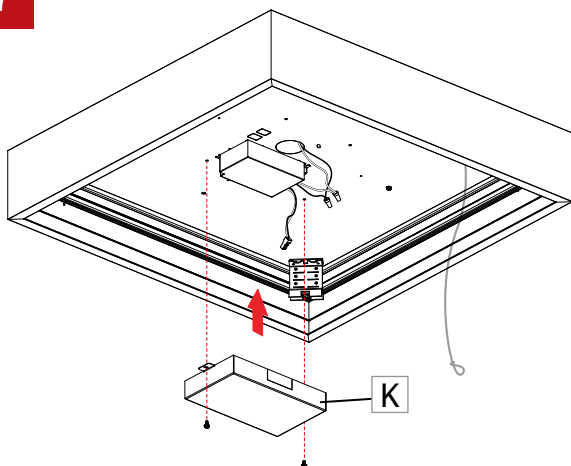


Screw back in place the driver box (K) and make sure to cover the wire connection with the junction box.

8

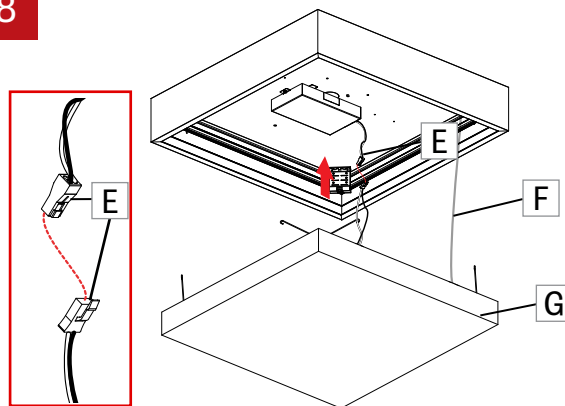

Attach security cable (F). Make wires connection between the driver and the diffuser (G) by connecting quick connectors (E).

9

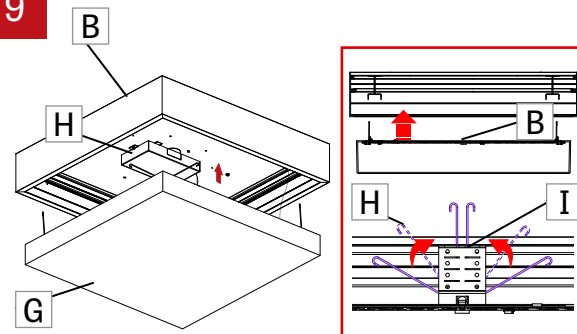

Squeeze, align and insert the spring (H) into the brackets (I) that are further inside the housing. Once all the springs (H) are properly installed, slowly push the diffuser (G) in the housing (B) as far as the brackets (I) allow.