


POP CORE SURFACE MOUNT


LED BOARD REPLACEMENT

IMPORTANT: Installation instructions are shown with Pop Round and applies to all Pop Round and Pop Square fixtures


NOTE: Wire dimming conductors as Class 1

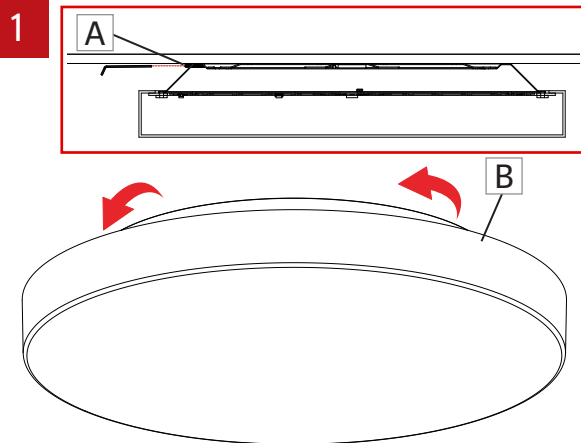


Make sure the power to the fixture is turned off.
If wall mount, remove the set screw (A) on the fixture (B) with an Allen key.
Turn the fixture (B) counterclockwise to unlock it.

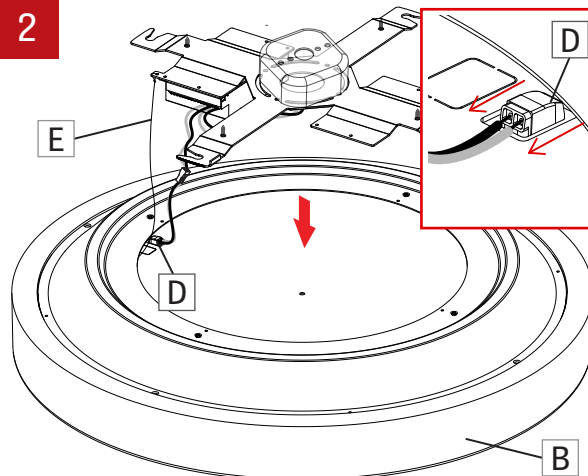


Lower the fixture (B) and disconnect wires from molex connector (D) (on LED plate holder). Then remove the safety cable (E).

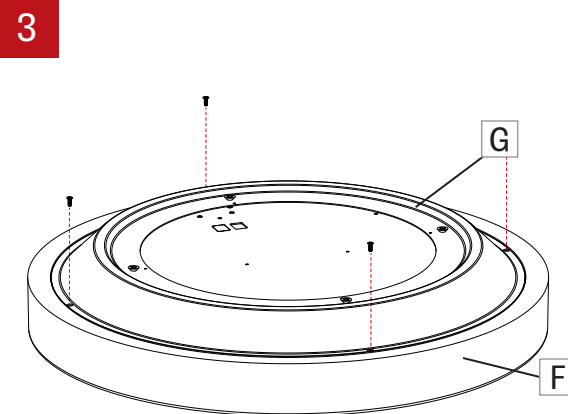


Unscrew the diffuser (F) to separate it from the top part (G).

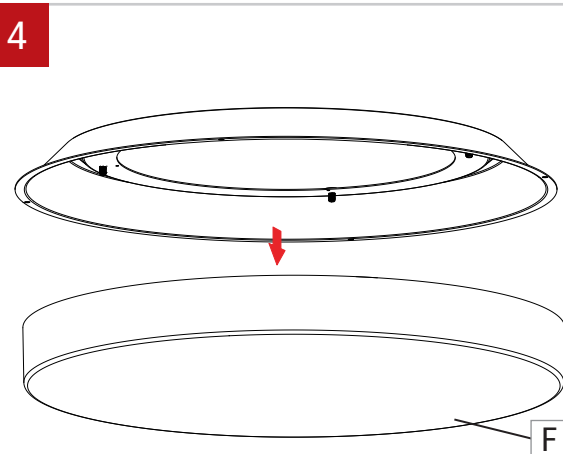

Carrefully lower the diffuser (F) .

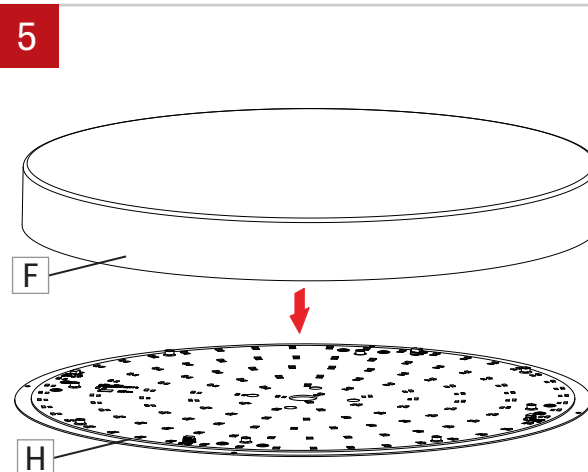


Separate LED plate (H) from the diffuser (F).

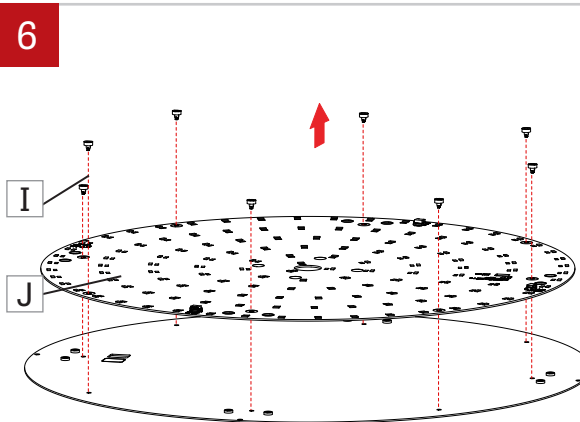


Remove push pins (I) on the LED board (J) to separate it from the LED holder.

POP CORE SURFACE MOUNT


LED BOARD REPLACEMENT

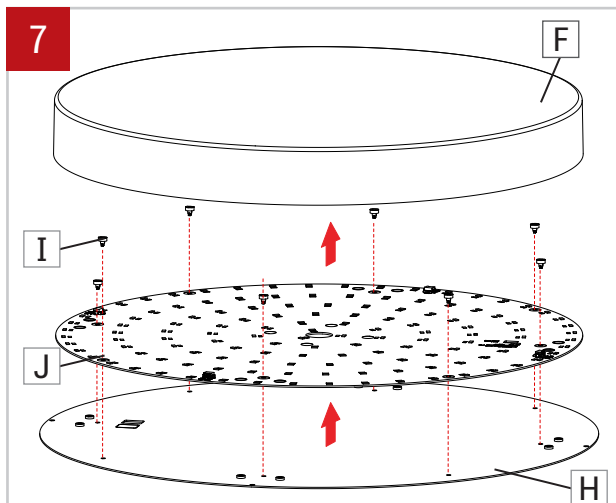


Replace LED board (J) and reinstall it on the LED plate (H). Secure it by putting back provided push pins (I). Place LEDs on the diffuser (F).

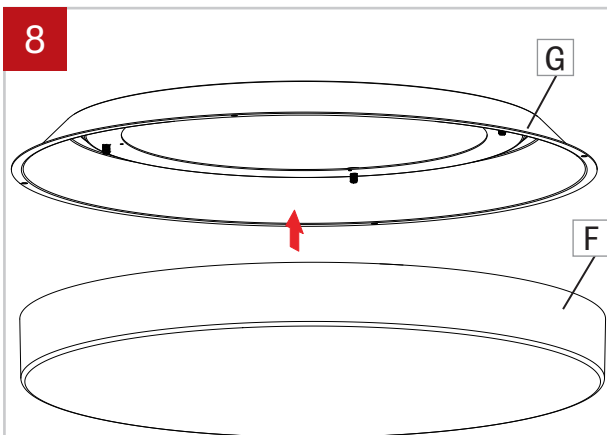


Reinstall the top part (G) on the diffuser (F).

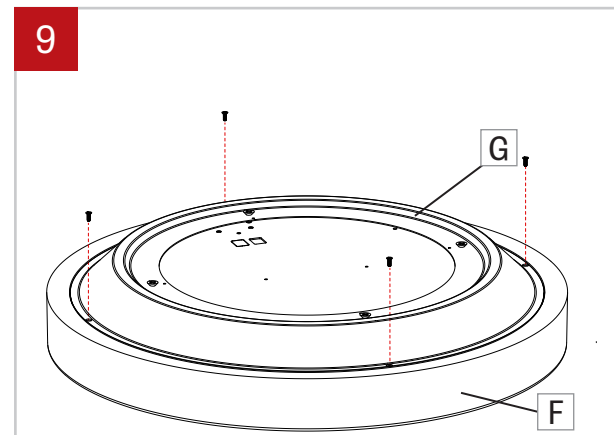

Screw back in place the top part (G) of the fixture on the diffuser (F).

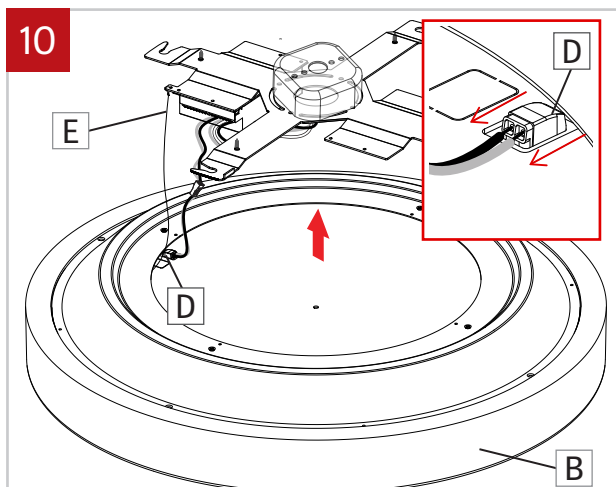

Install safety cable (E) back in place. Reconnect the wires from the driver to the mox connector (D). Carrefully lift up the fixture (B) to place it on the mouting bracket (C).

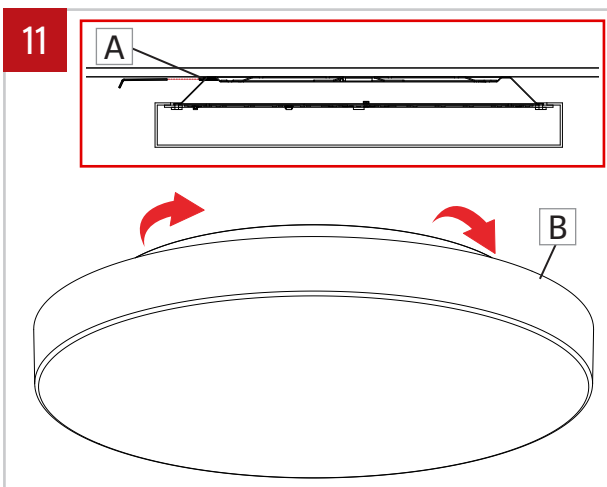

Place the fixture (B) on the mounting bracket and turn it clockwise to fix it.

If wall mount, lock the bracket by tightening the set screw (A) using an Allen key.