

AERA 3" FLEX CYLINDER

PENDANT
DIRECT



Project: _____
Type: _____

The Aera 3" Flex Cylinder is adjustable, tilting upwards to 90 degrees and rotating 355 degrees. Mountable as a recessed, surface, pendant, or wall fixture, it brings to the Aera family added flexibility and more options to customize lighting effects.

Beam Angles

15° 25° 35° 50° 80° 90°
Low UGR < 10 in 15°, 25°, 35°, and 50° beams

Performance

LUMEN OUTPUT ¹	WATTS	EFFICACY
1132 lm	10 W	113 lm/W
1545 lm	14 W	110 lm/W

¹Lumen packages are assuming 3500K, 80 CRI, 35° beam, bevel baffle, SDL lens option.

Light Source

Static White
Full Spectrum
SOLA - Dim-to-Warm
DUO - Tunable White

COB

2 Step Color Binning
Up to 95 CRI

Driver

1%, 0.1% Dimming Available
0-10V, TRIAC, ELV, Lutron EcoSystem, DALI, DMX
Emergency Battery (optional)

Mounting Options

Flat Conduit Direct

Aera Cylinder Family (Refer to other spec sheets)



2" / 3" / 4" / 5"
4" Seal
Pendant
Pendant Asymmetric
Pendant Wall Wash



2" / 3" / 4" / 5"
4" Seal
Wall
Wall Asymmetric



2" / 3" / 4" / 5"
4" Seal
Surface
Surface Asymmetric
Surface Wall Wash

Inflex Cylinder



3" / 4"
Pendant



3" / 4"
Surface

Flex Cylinder



3"
Pendant



3"
Recessed



3"
Surface



3"
Wall

AERA 3" FLEX CYLINDER

PENDANT
DIRECT



Project: _____

Type: _____

Order Guide

LUMINAIRE ID ¹	DISTRIBUTION	CYLINDER HEIGHT ²	CYLINDER FINISH	BAFFLE STYLE	BAFFLE FINISH
AE3FXCYP	D				
AE3FXCYP - Aera 3" Flex Cylinder Pendant ¹ Surface, Recessed, and Wall also available. Consult other spec sheets.	D - Direct	4.5IN - 4.5" 6IN - 6" ² See page 3 for dimensions.	FTMW - Textured matte white FTMB - Textured matte black FCHP - Champagne CF# - Custom finish, specify RAL#	BVL - Bevel PHL - Pinhole BVLD - Decorative bevel	FTMW - Textured matte white FTMB - Textured matte black FSPC - Specular FSSPC - Semi-specular FCHP - Champagne CF# - Custom finish, specify RAL#

LENS [*] See page 3 for details	LIGHT SOURCE	BEAM	COLOR QUALITY	CRI	COLOR TEMP.
At baffle (choose 1 option) Specify NOL for Pinhole SDL - Soft diffused lens, Solite FDL - Frosted diffused lens CL - Clear lens NOL - No lens	SW - Static white FS - Full spectrum SOLA - Dim-to-warm single channel control 35K to 22K DUO - Tunable white 2-channel control 65K to 27K	15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood 80DEG - 80° Very wide flood 90DEG - 90° Open flood 50DEG - 50° Wide flood	2STP ³ - 2 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse ³ Not available with full spectrum. 3STP - 3 Step MacAdam Ellipse	90CRI ⁴ - 90 CRI 95CRI - 95 CRI 80CRI - 80 CRI ⁴ Not available with full spectrum. 90CRI - 90 CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K SOLA - Dim-to-warm single channel control 35K to 22K DUO - Tunable white 2-channel control 65K to 27K

* **LSDL** or **LFDL** at light element cannot be combined with **SDL**, **FDL**, or **CL** at baffle. For **SOLA/DUO**, one of the following lenses must be specified: **SDL**, **FDL**, **LSDL**, or **LFDL**.

ACCESSORIES [*] See page 3 for details	VOLTAGE	WATTAGE ⁸	DIMMING ⁹

At light element ^{5,6} (choose up to 2 options) LSDL - Soft diffused lens, Solite LFDL - Frosted diffused lens LS - Linear spread HEX - Hex louver NA - None ⁵ If two options are specified, separate codes with a "+", e.g. LSDL+HEX . ⁶ LSDL and LFDL cannot be combined. LS and HEX cannot be combined.	120V - 120V 277V - 277V UNV - 120V-277V 347V ⁷ - 347V ⁷ Available with RD1 driver only. Please consult factory.	10W - 10 W output, up to 1132 lm 14W - 14 W output, up to 1545 lm ⁸ Lumen outputs are reduced with full spectrum, consult factory.	INTEGRAL ¹⁰ D1 - 1% 0-10V ELV ¹¹ - ELV 120V TRI ¹¹ - TRIAC 120V	REMOTE ¹² RD1 - 1% 0-10V RELV ¹¹ - ELV 120V RTRI ¹¹ - TRIAC 120V RLDE1 ¹³ - Lutron Hi-lume 1% Eco	RDA ¹³ - DALI RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V +EB ¹⁴ - Emergency battery
			⁹ PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹⁰ Not available with DMNC/DMRM canopy options. ¹¹ Available with 120V only. ¹² A remote driver box is provided, see page 4 for details. ¹³ On-site commissioning is required. ¹⁴ For emergency battery, code will be like the following example: RD1+EB	SOLA 12W - 12 W output, up to 725 lm DUO 11W - 11 W output, up to 525 lm	SOLA SD1 - Single 0-10V input SELV ¹¹ - ELV 120V STRI ¹¹ - TRIAC 120V


CANOPY TYPE ¹⁵	CANOPY FINISH	SUSPENSION ²⁰
FLR ¹⁶ - Flat round canopy, 4" octagonal junction box CDR ¹⁷ - Conduit feed, round canopy DMNC ¹⁸ - Direct mount, new construction DMRM ^{18,19} - Direct mount, remodel ¹⁵ See page 4 for details. ¹⁶ Driver is housed in j-box when specified with integral drivers. ¹⁷ Driver is housed in canopy when specified with integral drivers. ¹⁸ Available with remote driver only. ¹⁹ Single wiring entry only. No daisy chain connections allowed.	FTMW - Textured matte white FTMB - Textured matte black FSPC - Specular FSSPC - Semi-specular FCHP - Champagne CF# - Custom finish, specify RAL#	BKS##IN - Textured black stem WHS##IN - Textured white stem CF#S##IN - Custom finish stem ²⁰ Min 10" - max 72", specify length (##) in inches.

AERA 3" FLEX CYLINDER


PENDANT
DIRECT



Dimensions

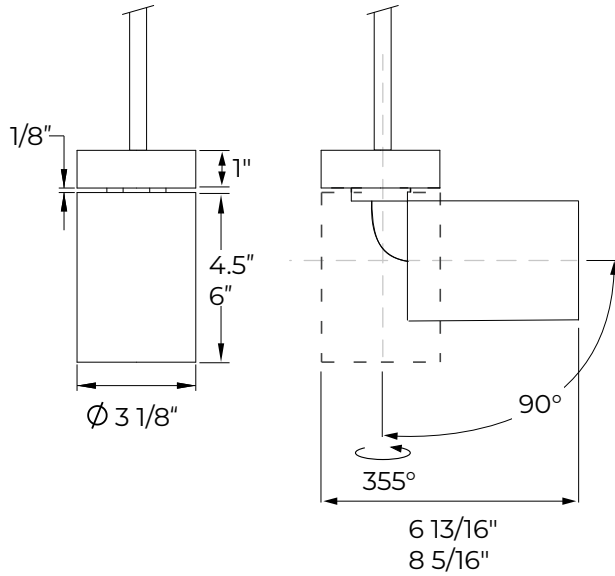

LENS AND ACCESSORIES

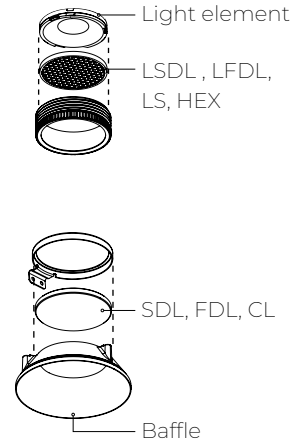

BAFFLE

BVL Bevel	PHL Pinhole	BVLD Decorative bevel
<p> Baffle finish Textured matte black </p>		
<p> $\text{Ø } 3\frac{1}{16}"$ $\text{Ø } 1\frac{13}{16}"$ 20° Cut-off 56° Shielding $7\frac{7}{8}"$ </p>	<p> $\text{Ø } 3\frac{1}{16}"$ $\text{Ø } 1\frac{13}{16}"$ Optic 40° Cut-off $1\frac{13}{16}"$ 56° Shielding </p>	<p> $\text{Ø } 3\frac{1}{8}"$ $\text{Ø } 1\frac{13}{16}"$ 23° Cut-off 58° Shielding $1"$ $3\frac{1}{16}"$ </p>

AERA 3" FLEX CYLINDER



PENDANT DIRECT

Mounting

CANOPY

INTEGRAL DRIVER		REMOTE DRIVER				
Order code	FLR Flat round canopy, 4" octagonal junction box	CDR Conduit feed, round canopy box	FLR Flat round canopy, 4" octagonal junction box	CDR Conduit feed, round canopy box	DMNC Direct mount, new construction	DMRM * Direct mount, remodel
Canopy type						
Canopy size	Ø 4 5/8" Height 1/4"	Ø 5 1/2" Height 1 15/16"	Ø 4 5/8" Height 1/4"	Ø 5 1/2" Height 1 15/16"	Ø 3 1/8" Height 2"	
Suspension	Stem		Stem			


* Single wiring entry only. No daisy chain connections allowed.

SUSPENSION


STEM
Stem
Stem Lengths
Min 10" Max 72"

REMOTE DRIVER BOX

RDB8 / RDB18 / RDB24



RDB24W

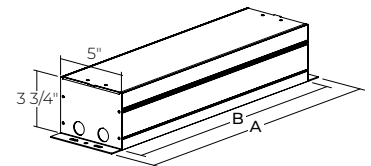

	RDB8	RDB18	RDB24	RDB24W
A	10"	20"	26"	26"
B	8"	18"	24"	24"
DRIVER	RD1 - 1% 0-10V RELV - ELV 120V RTRI - TRIAC 120V SOLA RSD1 - Single 0-10V input RSELV - ELV 120V RSTRI - TRIAC 120V	RLDE1 - Lutron Hi-lume 1% Eco RDA - DALI RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V	Emergency battery (+EB) with the following driver options. RD1+EB - 1% 0-10V RELV+EB - ELV 120V RTRI+EB - TRIAC 120V DUO RDMX - DMX RDDA - DALI DT6 RDDA8 - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RPSQO - Lutron T-Series 1% tunable white	Emergency battery (+EB) with the following driver options. RLDE1+EB - Lutron Hi-lume 1% Eco RDA+EB - DALI RELD1+EB - eldoLED 1% ECOdrive 0-10V RELD0+EB - eldoLED 0.1% SOLOdrive 0-10V


AERA 3" FLEX CYLINDER



PENDANT
DIRECT


Color Quality

COLOR QUALITY - 3500K	
TM-30 Rr	90
TM-30 Ra	100
CRI	90
R9	> 50




Photometrics


Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, baffle styles, baffle colors, lensing and accessories will change the lumen value.




15°




25°




35°



50°



80°



90°

Delivered Lumens for Bevel Baffles - At 35K, with SDL lens option

CRI	90 CRI						95 CRI						80 CRI						
	BEAM	15	25	35	50	80	90	15	25	35	50	80	90	15	25	35	50	80	90
10 W	987	1053	1058	937	843	843	760	811	815	721	649	649	1056	1127	1132	1003	902	902	902
14 W	1347	1438	1444	1280	1152	1152	1037	1107	1112	986	887	887	1441	1539	1545	1370	1233	1233	1233

Efficacy Based on Delivered Lumens

CRI	90 CRI						95 CRI						80 CRI						
	BEAM	15	25	35	50	80	90	15	25	35	50	80	90	15	25	35	50	80	90
10 W	99	105	106	94	84	84	76	81	81	72	65	65	106	113	113	100	90	90	90
14 W	96	103	103	91	82	82	74	79	79	70	63	63	103	110	110	98	88	88	88

MULTIPLIERS

CCT		BAFFLE STYLE AND COLOR		LENS * (At baffle)		ACCESSORIES * (At light element)		
2700K	0.9	Bevel	White	1	SDL - Soft diffused lens, Solite	1	LSDL - Soft diffused lens, Solite	1
3000K	0.95		Black	1	FDL - Frosted lens	0.8	LFDL - Frosted lens	0.8
3500K	1	Pinhole	White	0.92	CL - Clear lens	1.1	LS - Linear spread	0.84
			Black	0.92	NOL - No lens	1.1	HEX - Hex louver	0.86
4000K	1.05	Decorative bevel	White	1	* When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory. e.g. NOL + LSDL + HEX = 1.1 x 1 x 0.86 = 0.946			
	Black		1					

For SOLA and DUO, please consult factory.



AERA 3" FLEX CYLINDER


PENDANT
DIRECT



Technical Specifications

OPTIC

XPoint™ Refraction Technology optics provide precise optical control in a remarkably compact form. Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.



LIGHT SOURCE

Compact COB (Chip-On-Board) LED module, available in 2700K, 3000K, 3500K and 4000K with a choice of 80 CRI, 90 CRI, or 95 CRI, with elevated R9 value for 90 CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated. Optional full spectrum LEDs can be incorporated in the fixture to increase Cyanosis Observation Index (COI) and assist in regulating circadian rhythms.

CHROMAWERX

Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool (6500K) to warm (2700K) LED arrays - maintaining a CRI above 90. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency>84%, PF>0.9, THD<20%.

Integral: 0-10V, ELV, TRIAC.

Remote: 0-10V, ELV, TRIAC, Lutron Hi-Lume 1% EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron T-series (tunable white).

Emergency Battery Option: Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10W, the battery provides 6W of emergency light output. For fixtures 10W and over, the battery provides 10W.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire, or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing: Die-cast and extruded aluminum.

Stem: Rigid stem 10" to 72" standard length

Canopy: Flat, conduit feed and direct.

Finish: Textured matte white, black, and champagne. Custom colors also available (provide RAL #). Specular and semi-specular finishes are also available for Baffle.

Heat sink: Die-cast aluminum.

WEIGHT

4.5" - 1.8 lbs - 0.82 kg

6" - 2.4 lbs - 1.09 kg

BAFFLE

Die-cast aluminum

Baffle style: Bevel, pinhole, and decorative bevel

LENS AND ACCESSORIES



Soft diffused lens, Solite



Frosted diffused lens



Clear lens



Linear Spread



Hex Louver

ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

AERA 3" FLEX CYLINDER

PENDANT

DIRECT



CERTIFICATIONS

ETL - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.