


**IMPORTANT:** Installation instructions are shown with Quad Narrow and applies to all Quad sizes

**NOTE:** Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

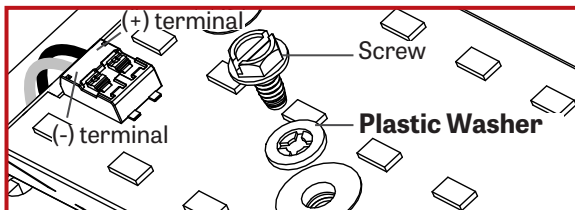


### 1 SINGLE FIXTURE

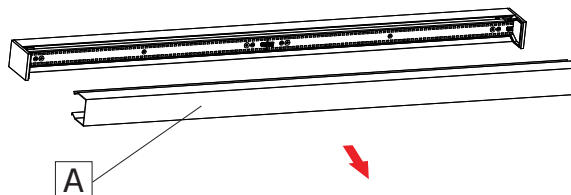


Remove lens (A).

### 2

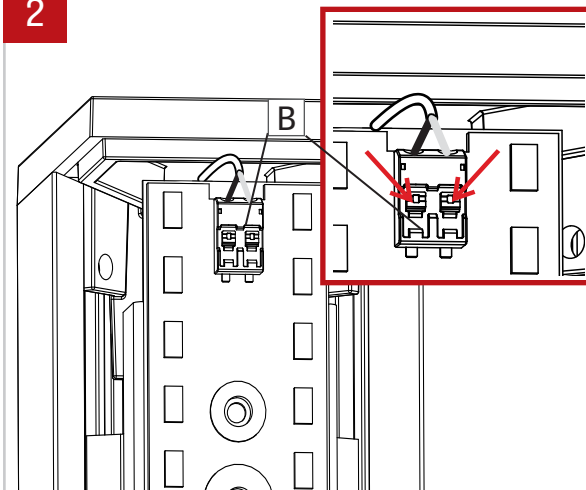


Disconnect LED molex connector (B) by taking a pointed object and pressing on the two tabs on the top.

### 3

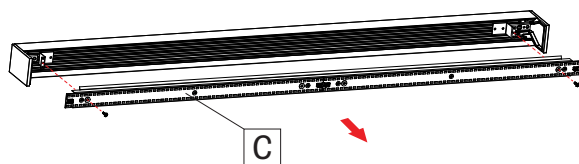


Unscrew the cartridge (C) and remove it from the fixture. Place the cartridge in a safe place.

### 4

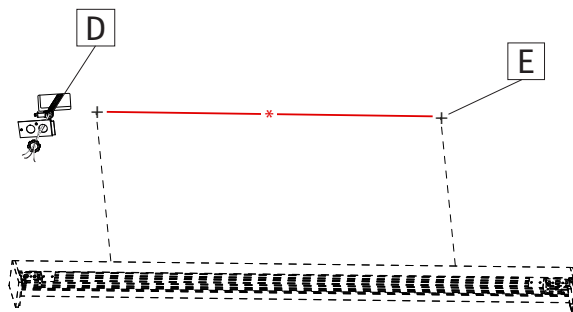


Locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions [\*] supplied in client drawings.

### 5

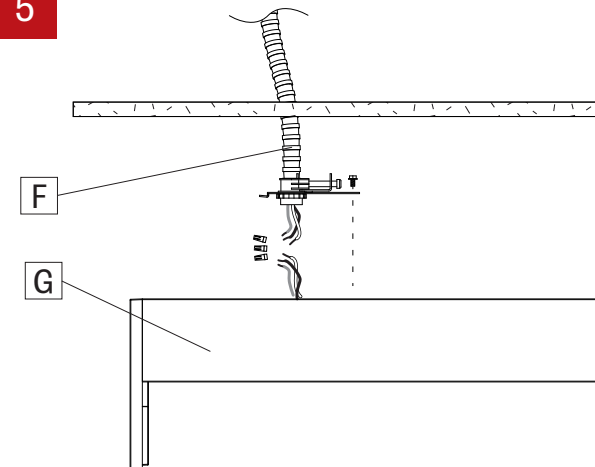


Make electrical connections between main power (F) and fixture (G).

6

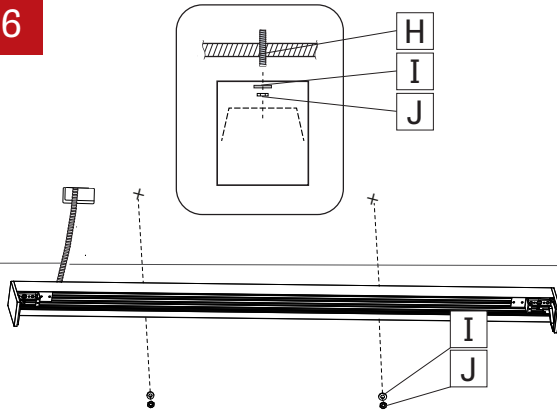


Fasten fixture to threaded studs (H) using washers (I) and nuts (J). (If there's no threaded stud present, the fixture can be screwed directly onto the ceiling).

7

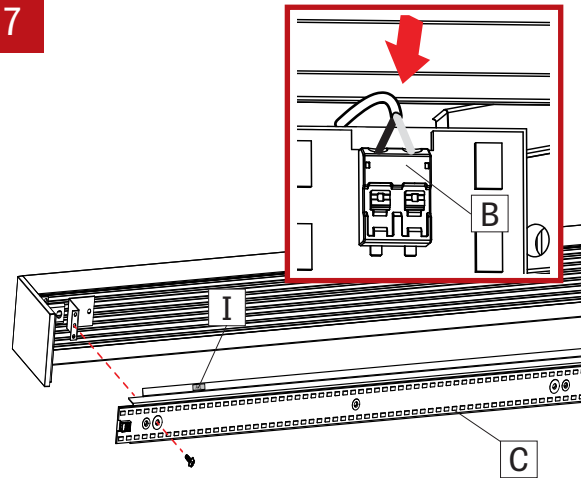

Reconnect LED module connector (B) to the cartridge (C). Reinstall the cartridge (C) by **using screws and plastic washers. Do not apply too much pressure.**


8

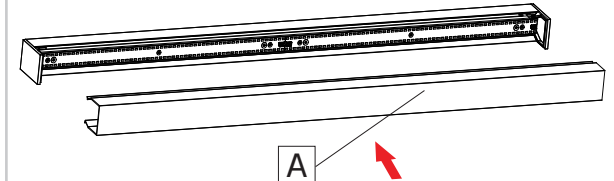

Reinstall the lens (A) back in place.


9

### CONTINUOUS SYSTEM

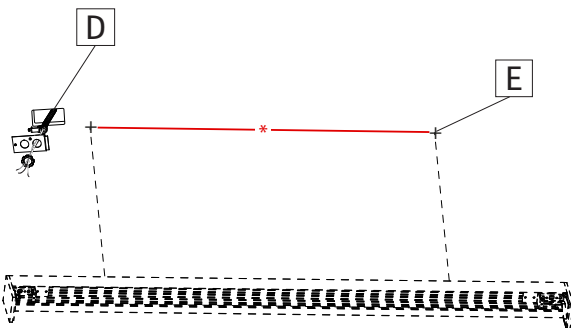


For a continuous system, locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions [\*] supplied in client drawing.

10

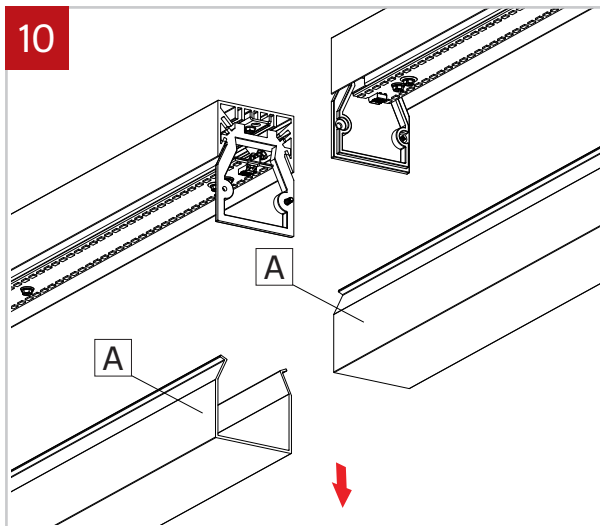


Remove lenses (A) from all fixture in the run.


11

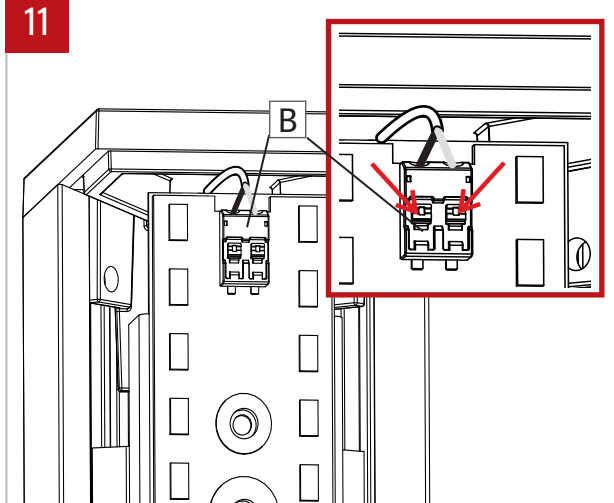


Disconnect LED module connector (B) by taking a pointed object and pressing on the two tabs on the top.

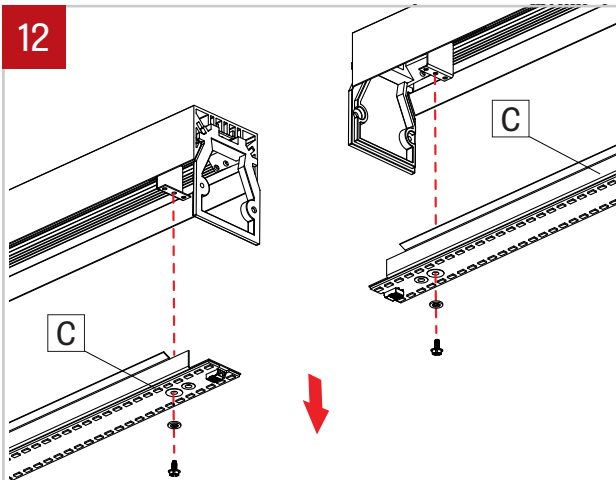


Unscrew the cartridges (C) and remove them from the fixtures. Place the cartridges in a safe place.

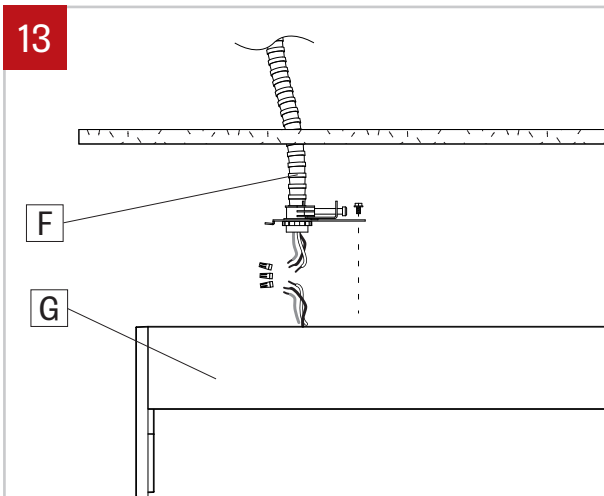


Make electrical connections between the first fixture (G) and main power (F).

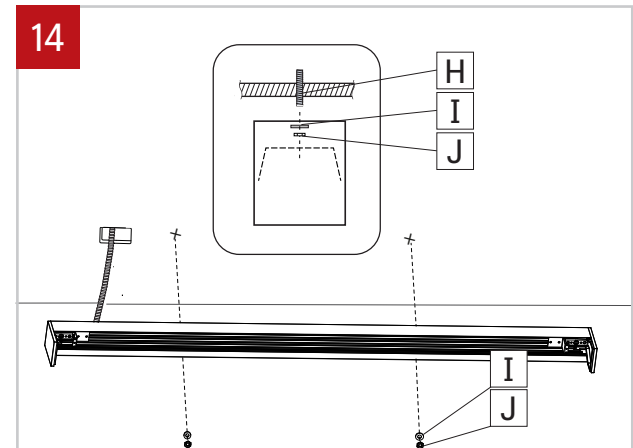


Fasten the first fixture to threaded studs (H) using washers (I) and nuts (J).

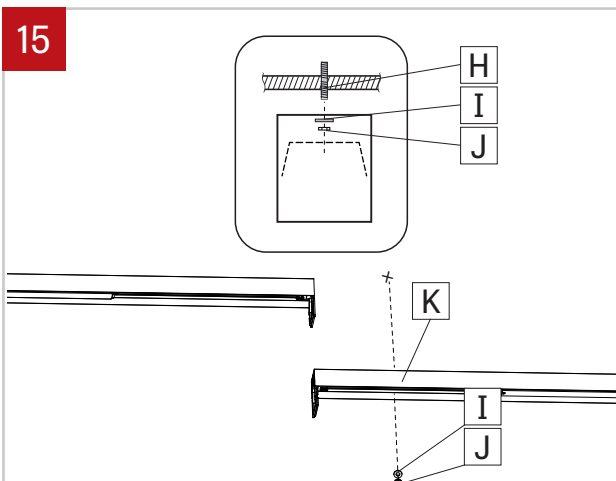

Locate mounting points of the second fixture (K) and install it. Fasten the second fixture to threaded studs (H) using washers (I) and nuts (J) without overtighten.

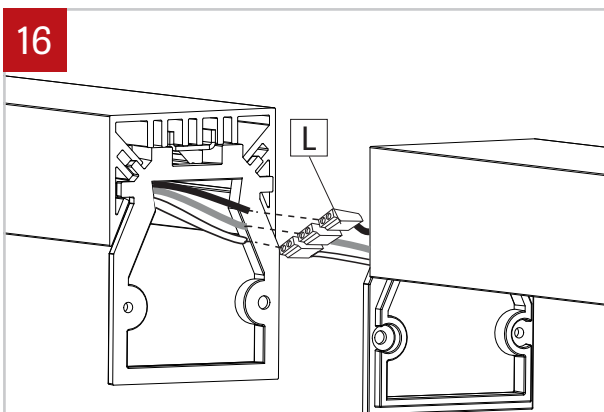


Connect wires between joining fixtures using quick connectors (L).

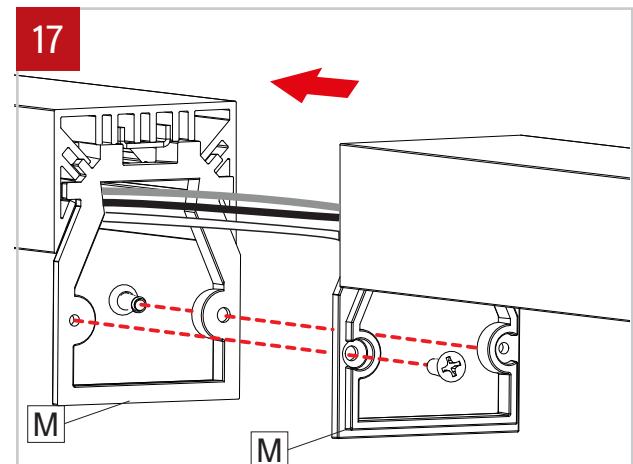

Join fixtures together and attach them by fastening screws on the joiners (M). Repeat steps 15 to 17 for all others fixtures. Then tighten all washers and nuts on the threaded studs to secure the fixtures.

18

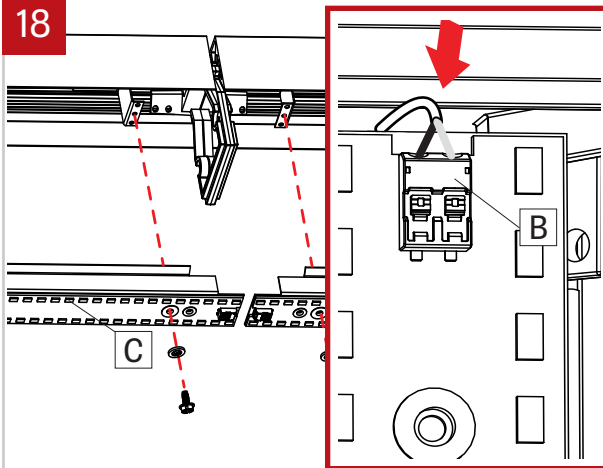

Reconnect LED moxex connector (B) to the cartridge (C). Reinstall the cartridges (C) and the lenses by **using screws and plastic washers. Do not apply too much pressure.**