



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

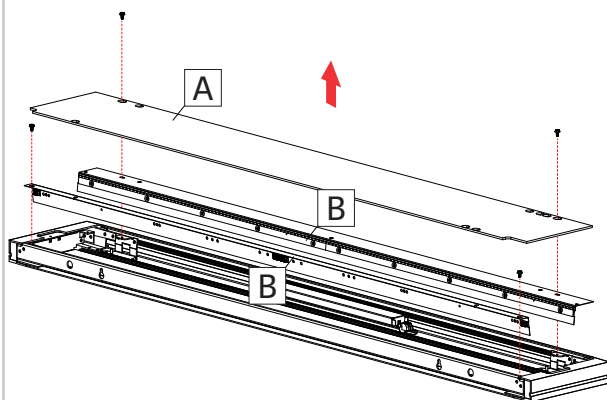


Unscrew and remove the dust cover (A) (if provided) and unscrew the side reflectors (B).

2

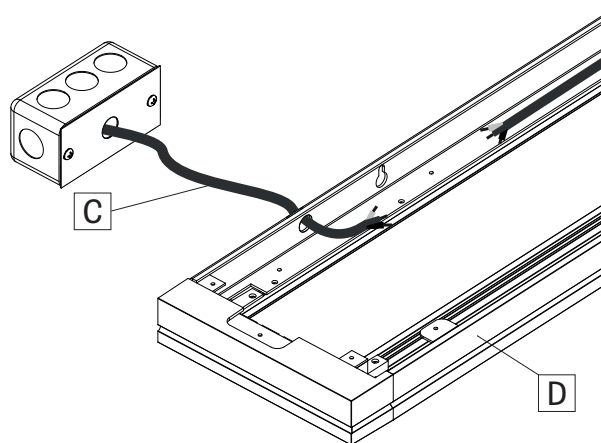


Insert wall power cable (C) inside the fixture (D).

3

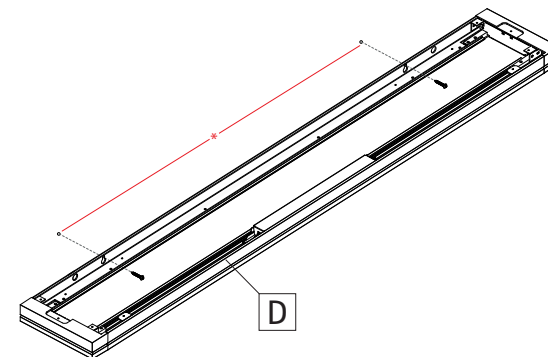


Install the fixture (D) on the wall according to the dimensions [*] given in the client drawings. Screw the fixture (D) to the wall without overtightening.

4

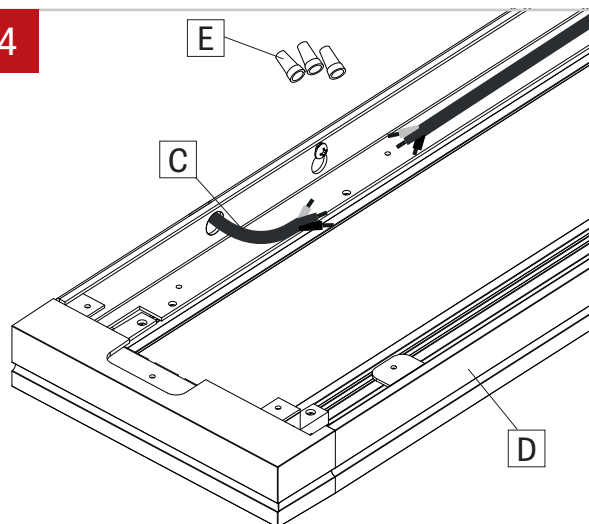

Make wire connection between fixture (D) and wall power cable (C) using wire nuts (E) (2x4 J-Box). Tighten all screws on the wall bracket.


5

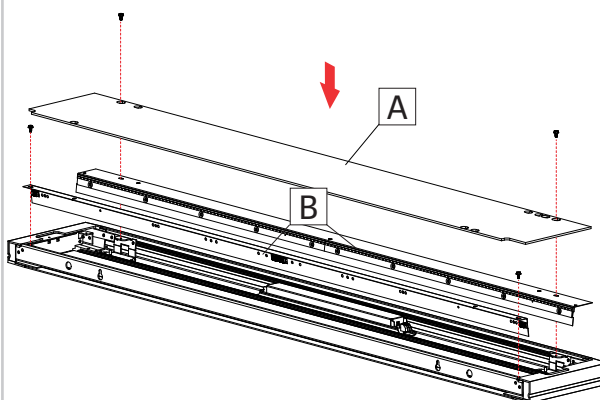

Reinstall side reflectors (B) into fixtures by fastening the screws. Reinstall the dust cover (A) (if provided).


6

CONTINUOUS SYSTEM

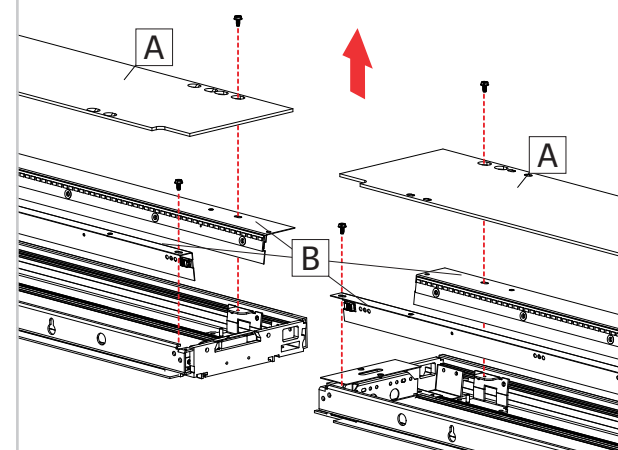


Unscrew and remove the dust cover (A) (if provided) and unscrew the side reflectors (B). Repeat for all fixtures in the run.

7

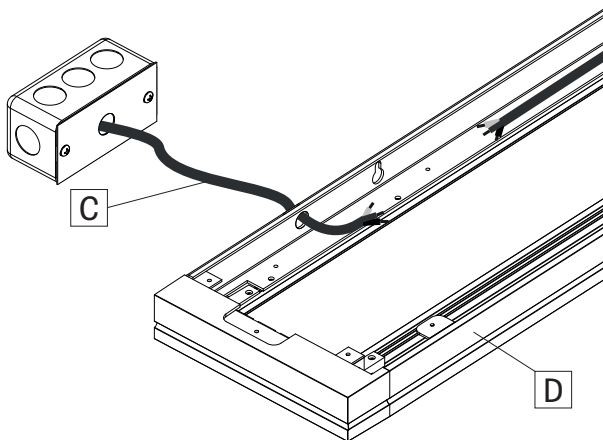


Insert wall power cable (C) inside the fixture (D).

8

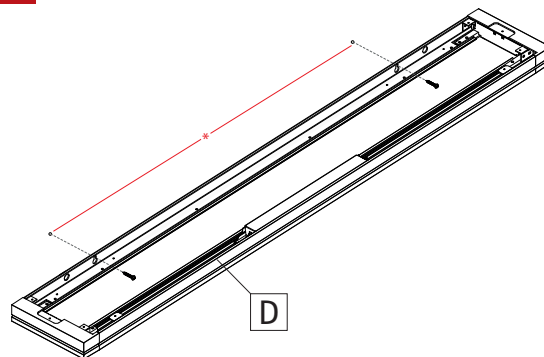


Install the first fixture (D) on the wall according to the dimensions [*] given in the client drawings. Screw the fixture (D) to the wall without overtightening.

9

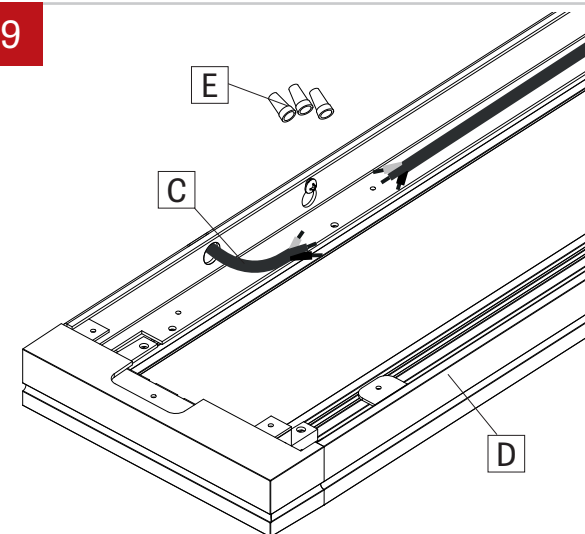


Make wire connection between fixture (D) and wall power cable (C) using wire nuts (E) (2x4 J-Box).

10

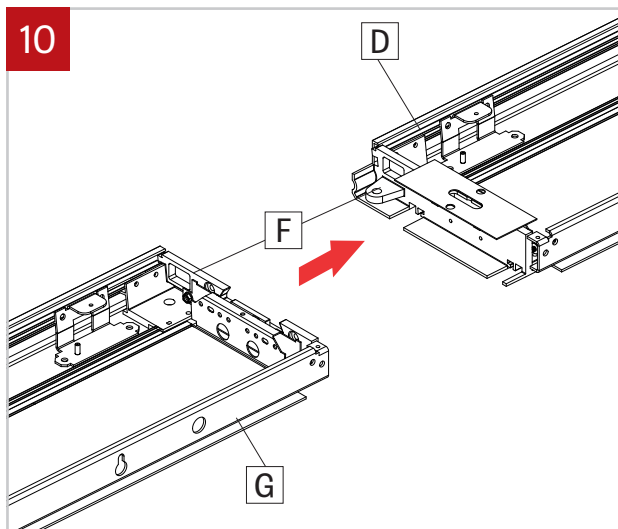


Align the joiners (F) at the end of the fixtures (D) and (G) and connect them.


11

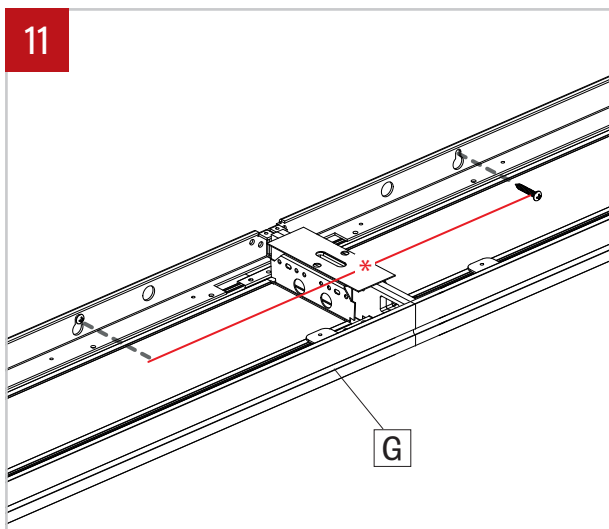


Locate mounting points of the second fixture (G) and install it. Fasten the second fixture (G) to the wall without overtightening.

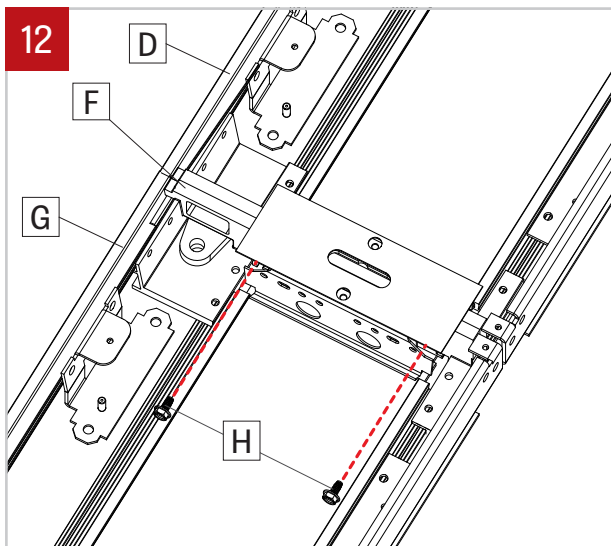

Secure the two fixtures (D) and (G) by fastening security screws (H) to the joiners (F).

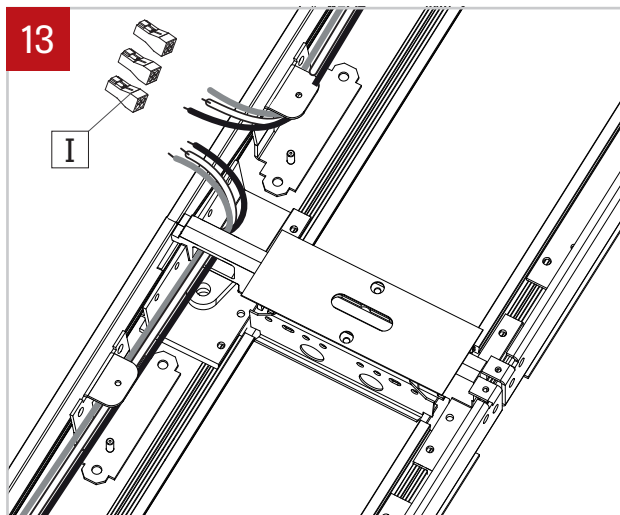

13 Connect wires between joining fixtures using quick connectors (I). Repeat steps 10 to 13 for all other fixtures in the run. Tighten all mounting screws.

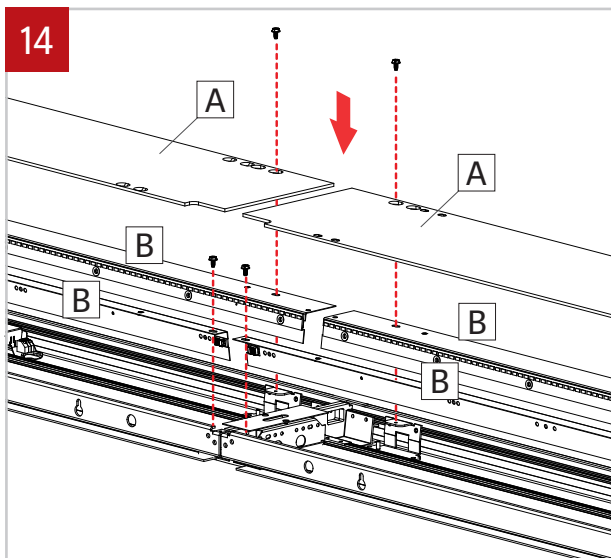

14 Reinstall reflectors (B) into fixtures by fastening the screws. Reinstall the dust cover (A) (if provided).