


**NOTE:** Wire dimming conductors as Class 1



Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

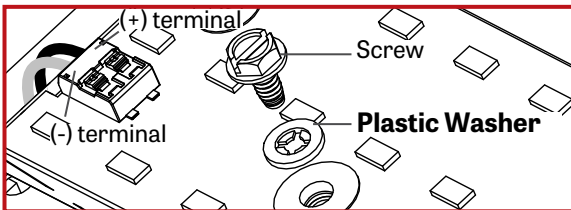


This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. la mise à terre électrique est obligatoire pour la sécurité.




Rize SW, BIOSST, BIOSDY, Full Spectrum and SOLA are non-IC rated. Do not install with insulation directly on the fixture. Rize DUO is IC rated.

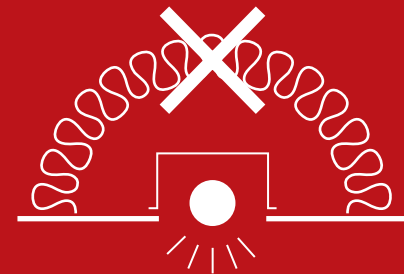


1

### MASTER FIXTURE

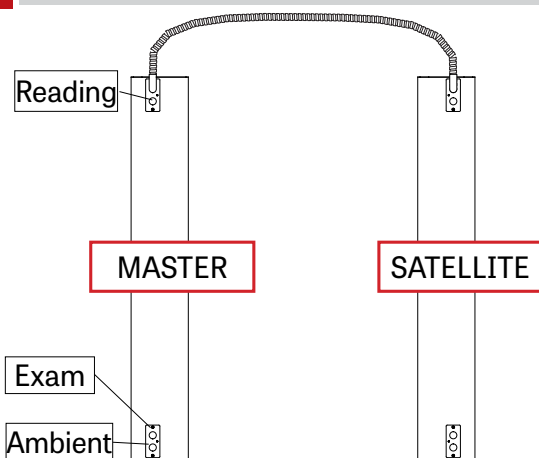


**Warning:** A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

2

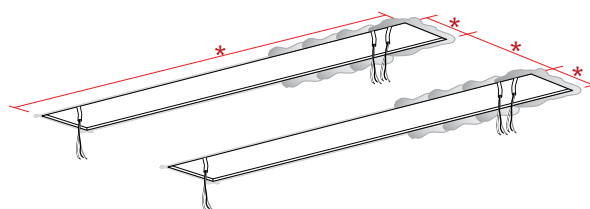


Prepare the areas where the fixtures are going to be installed. Cut holes in the drywall according to the dimensions [\*] in the client drawings. Tape and finish the edges of the drywall. Power feeds must be brought to the master fixture.

3

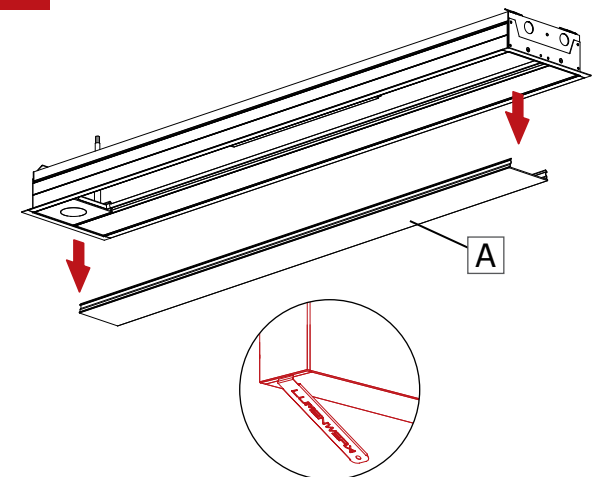


Remove the lens (A) with the included lens tool.

4

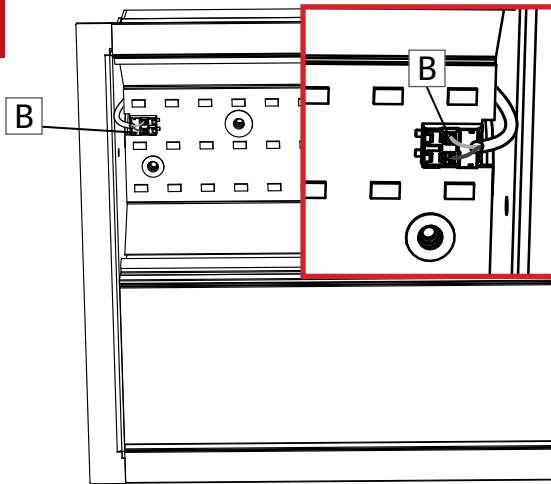


Disconnect LED mox connector (B) by taking a pointed object and pressing on the two tabs on the top.

5

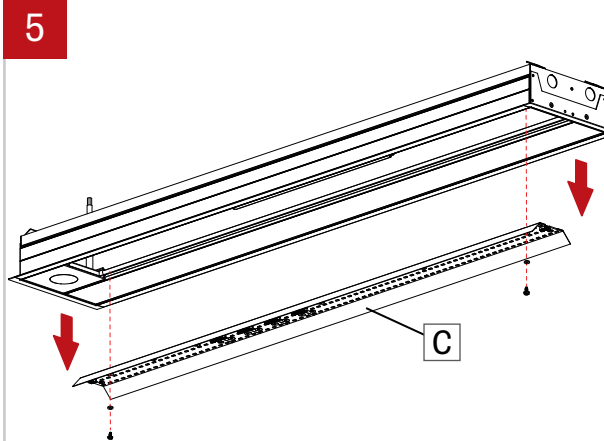


Remove the cartridge (C).

6

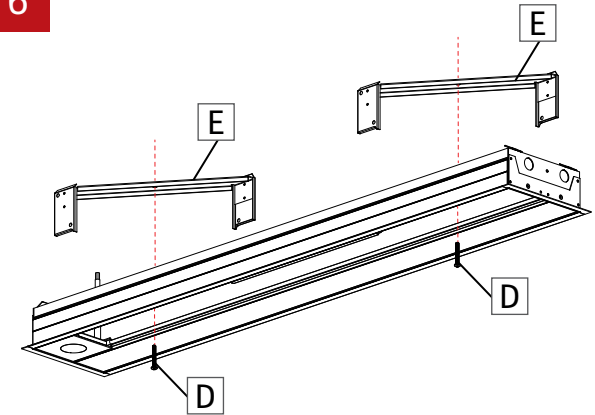


Remove the screws (D) from the drywall bracket (E). Install the drywall brackets (E) on the fixture and secure them by putting back in place the screws (D). Make sure that the screws are not overtighten and that the drywall brackets (E) don't rotate in place.

7

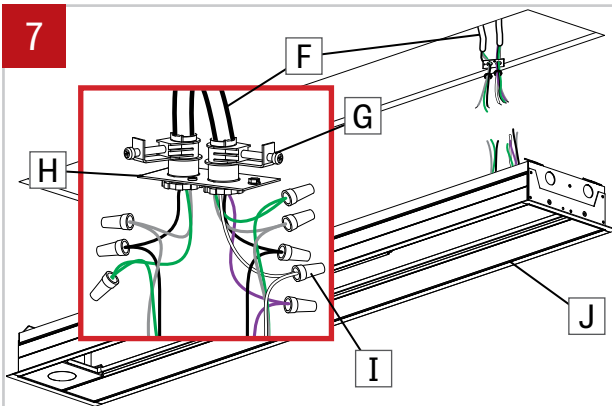


Install the first and the second power cables (F) (by other) through the BX connector (G) (by other) and install onto the power plate (H) provided. Make electrical connections between power cables (F) and fixture cables using electrical marettes (I). Reinstall the power plate (H) to the fixture (J).  
**Number of wires may vary.**

8

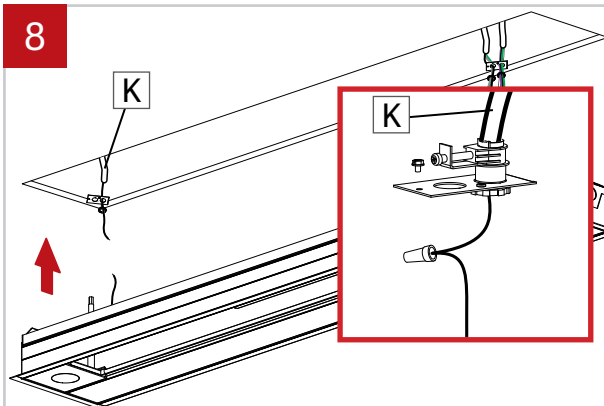


To install the third power cable (K) (by other), repeat step 6. Insert the fixture into pre-cut hole in drywall.  
**Number of wires may vary.**

9

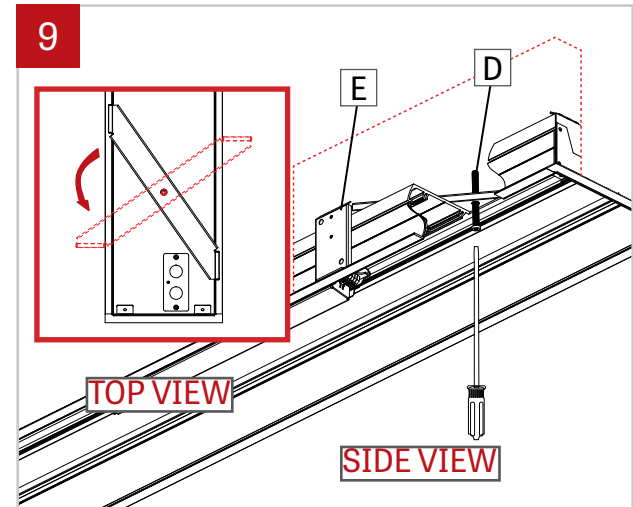


Tighten the drywall bracket screws (D) to rotate the drywall brackets (E) in place. Tighten the drywall bracket screws (D) to lock into place.

10

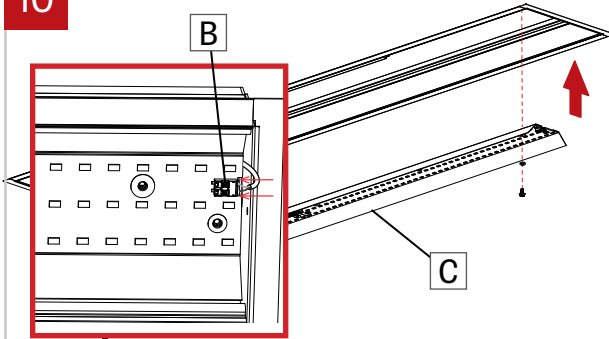

Reinstall the cartridge(s) (C) and reconnect the LED molex connector (B). **NOTE: connect blue wire into the negative (-) terminal and the red wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place by **using screw with plastic washer. Do not apply too much pressure.**


11

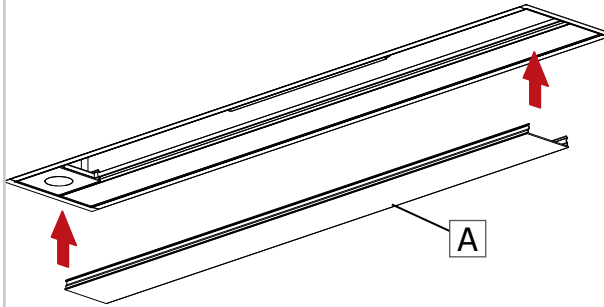

Put the lens (A) back in place.


12

SATELLITE FIXTURE

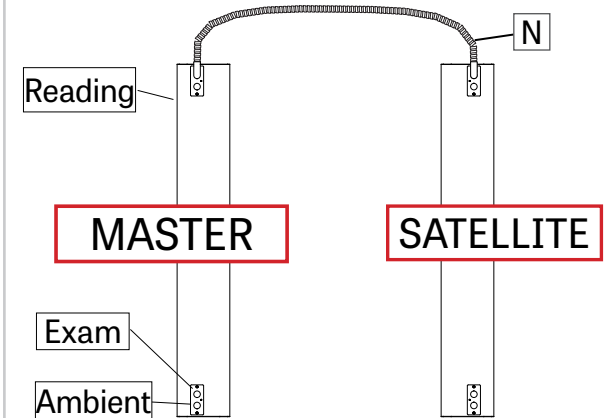


The BX Cable (N) is a 6' BX Flexwhip with 2x 90° 3/8 quick knock out

13

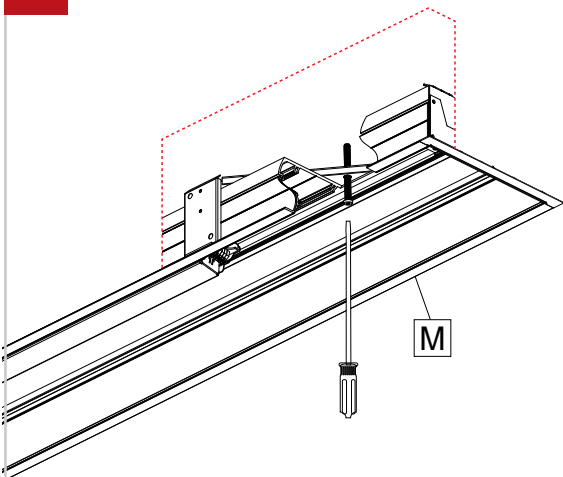


Install the satellite fixture (M) like the master fixture (L).

14

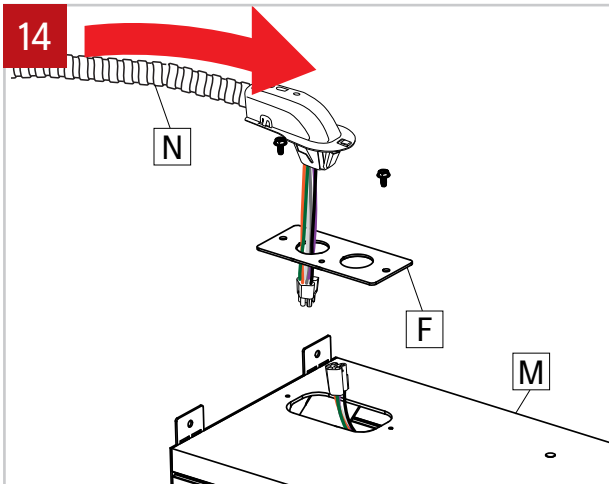

Bring the BX low voltage cable (N) that is already connected to the master fixture to the satellite fixture (M). Remove the power plate (F) and push the power knock out.

15

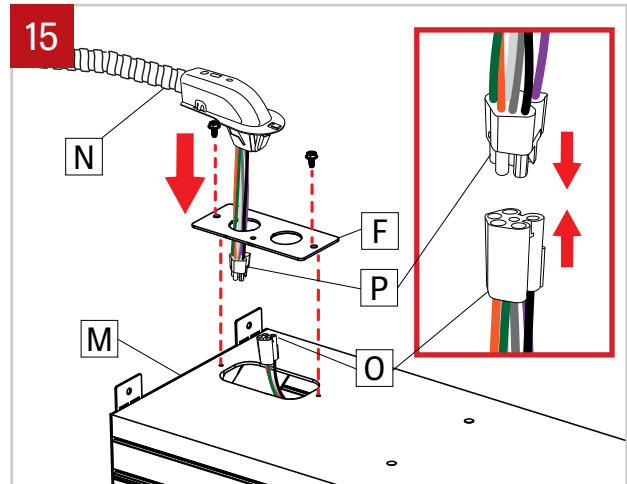

Bring the BX low voltage cable (N) that is already connected to the master fixture to the satellite fixture (M). Remove the power plate (F) and push the power knock out.