


# AERA 4" DOWNLIGHT

SQUARE RECESSED WALL WASH  
NEW CONSTRUCTION & REMODEL



Declare.

Wall Wash Trimless  
Drywall Mudplate



Wall Wash  
Flanged Trim



Aera recessed downlights are true to size, encased in minimalist housing, and suitable additions to any interior space where outstanding optical performance, maximal eye comfort, and/or an industry-leading wall wash are required.

## Ceiling Types



Drywall



Millwork



Wood Slat  
Consult factory



Acoustic Tile

## Installation Types

New Construction (Type Non-IC, Type-IC, CCEA)  
Remodel (Type Non-IC)

## Plenum Clearance



## Beam Angles



Low UGR < 10

Wall Wash

## Performance

LUMEN OUTPUT <sup>1</sup>	WATTS	EFFICACY
763 lm	14 W	54 lm/W
1216 lm	20 W	61 lm/W
1632 lm	28 W	58 lm/W

<sup>1</sup> Lumen packages are assuming 3500K, 80 CRI.

## Light Source

Static White  
Full Spectrum  
SOLA - Dim-to-Warm  
DUO - Tunable White



## COB

2 Step Color Binning  
Up to 95 CRI

## Drivers / Protocols

1%, 0.1% Dimming Available  
0-10V, TRIAC, ELV, Lutron EcoSystem, DALI, DMX  
Emergency Battery (optional)



Smart / Wireless Compatible

## Aera Family (Refer to other spec sheets)

### Downlight



2" / 3" / 4"  
Round / Square  
Recessed Adjustable



2" / 3" / 4"  
Round / Square  
Recessed



2" / 3" / 4"  
Round / Square  
Recessed Wall Wash

### Multi-aperture



2" / 3" / 4"  
Round / Square  
Recessed Adjustable



2" / 3" / 4"  
Round / Square  
Recessed



2" / 3" / 4"  
Round / Square  
Recessed Wall Wash

### Cylinder



2" / 3" / 4" / 5"  
4" Seal  
Pendant  
Pendant Asymmetric  
Pendant Wall Wash



2" / 3" / 4" / 5"  
4" Seal  
Wall  
Wall Asymmetric



2" / 3" / 4" / 5"  
4" Seal  
Surface  
Surface Asymmetric  
Surface Wall Wash

www.lumenwerx.com  
T (514) 225-4304

© Lumenwerx, ULC. All rights reserved.



Lumenwerx reserves the right to modify  
product specifications without notification.  
AERA4-DOWNLIGHT-SQUARE-RECESSED-WW-SPEC-REV7

March 6, 2025



# AERA 4" DOWNLIGHT

## SQUARE RECESSED WALL WASH NEW CONSTRUCTION & REMODEL



Project: \_\_\_\_\_

Type: \_\_\_\_\_

### Order Guide

#### 1 - Housing (Example: AE4SRWW-TRM-SW-OF-ASB-120V-14W-D1-NA)

LUMINAIRE ID <sup>1</sup>	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTION <sup>4</sup>
<b>AE4SRWW</b>				
<b>AE4SRWW</b> - Aera 4" Square Recessed Wall Wash  <sup>1</sup> Recessed (fixed) and Recessed Adjustable also available. Consult other spec sheets.	<b>TRM</b> - Flanged trim <b>TLMW</b> - Trimless drywall mudplate <b>TLMW</b> <sup>2</sup> - Trimless millwork  <sup>2</sup> For remodel (RM) installation type, TLMW adapter must be installed from above the ceiling or before ceiling is installed.	<b>SW</b> - Static white <b>FS</b> - Full spectrum static white  <b>SOLA</b> - Dim-to-warm single channel control <b>DUO</b> - Tunable white 2-channel control	<b>OF</b> - Open Frame Type Non-IC <b>IC</b> <sup>3</sup> - Type-IC <b>RM</b> - Remodel Type Non-IC <b>CP</b> <sup>3</sup> - Chicago Plenum Type-IC (CCEA) <b>AT</b> <sup>3</sup> - Airtight Type-IC  <sup>3</sup> Not available with 28 W output and higher.	<b>ASB</b> <sup>5</sup> - Adjustable standard bar hangers <b>FMB</b> <sup>5</sup> - Flush mount bars <b>ACB</b> <sup>5</sup> - Adjustable commercial bar hangers <b>AHC</b> <sup>5</sup> - Adjustable hat channel bars <b>NA</b> - No bar hangers  <sup>4</sup> See page 6 for more details. <sup>5</sup> Not available with RM installation type.
VOLTAGE	WATTAGE <sup>7</sup>	DIMMING <sup>9</sup>	OPTION <sup>20</sup>	
			<b>NA</b>	
<b>120V</b> - 120V <b>277V</b> - 277V <b>UNV</b> - 120V-277V <b>347V</b> <sup>6</sup> - 347V  <sup>6</sup> Available with RD1 driver only. Please consult factory.	<b>14W</b> - 14 W output, up to 763 lm <b>20W</b> - 20 W output, up to 1216 lm <b>28W</b> <sup>8</sup> - 28 W output, up to 1632 lm  <sup>7</sup> Lumen outputs are reduced with full spectrum, consult factory. <sup>8</sup> Not available with IC/CP/AT.  <b>SOLA</b> <sup>8</sup> <b>28W</b> - 28 W output, up to 1615 lm  <b>DUO</b> <sup>8</sup> <b>28W</b> - 28 W output, up to 1650 lm	<b>INTEGRAL</b>  <b>D1</b> - 1% 0-10V <b>ELV</b> <sup>10</sup> - ELV 120V <b>TRI</b> <sup>10</sup> - TRIAC 120V <b>LDE1</b> <sup>11,12</sup> - Lutron Hi-lume 1% Eco <b>DA</b> <sup>11,12</sup> - DALI <b>ELD1</b> <sup>11</sup> - eldoLED 1% ECOdrive 0-10V <b>ELDO</b> <sup>11</sup> - eldoLED 0.1% SOLOdrive 0-10V <b>PEQO</b> <sup>12,13,14</sup> - Lutron Hi-lume Premier 0.1% EcoSystem <b>DEB</b> <sup>14</sup> - 0-10V with onboard emergency battery backup  <sup>9</sup> PoE (Power-over-Ethernet) compatible. Consult factory for details. <sup>10</sup> Available with 120V only. <sup>11</sup> Not available with RM installation type. <sup>12</sup> On-site commissioning is required. <sup>13</sup> Not available with 28 W output. <sup>14</sup> Available with OF housing only.  <b>SOLA</b> <b>SD1</b> - Single 0-10V input <b>SELV</b> <sup>10</sup> - ELV 120V <b>STRI</b> <sup>10</sup> - TRIAC <b>DD1</b> - Dual 0-10V input for CCT/intensity 120V  <b>DUO</b> <sup>11</sup> <b>DMX</b> <sup>12</sup> - DMX <b>DDA</b> <sup>12</sup> - DALI DT6 <b>DDA8</b> <sup>12</sup> - DALI DT8 <b>DD1</b> - Dual 0-10V input for CCT/intensity 120V <b>LD2</b> <sup>12</sup> - Lutron DALI-2 digital	<b>REMOTE</b> <sup>15</sup>  <b>RD1</b> - 1% 0-10V <b>ELV</b> <sup>16</sup> - ELV 120V <b>RTRI</b> <sup>16</sup> - TRIAC 120V <b>RLDE1</b> <sup>17</sup> - Lutron Hi-lume 1% Eco <b>RDA</b> <sup>17</sup> - DALI <b>RELD1</b> - eldoLED 1% ECOdrive 0-10V <b>RELD0</b> - eldoLED 0.1% SOLOdrive 0-10V <b>RPEQO</b> <sup>17,18</sup> - Lutron Hi-lume Premier 0.1% EcoSystem <b>+EB</b> <sup>19</sup> - Emergency battery  <sup>15</sup> A remote driver box is provided, see page 5 for details. <sup>16</sup> Available with 120V only. <sup>17</sup> On-site commissioning is required. <sup>18</sup> Not available with 28 W output. <sup>19</sup> For emergency battery, code will be like the following example: RD1+EB  <b>SOLA</b> <b>RSD1</b> - Single 0-10V input <b>RSELV</b> <sup>16</sup> - ELV 120V <b>RSTRI</b> <sup>16</sup> - TRIAC <b>RDD1</b> - Dual 0-10V input for CCT/intensity 120V  <b>DUO</b> <b>RDMX</b> <sup>17</sup> - DMX <b>RDDA</b> <sup>17</sup> - DALI DT6 <b>RDDA8</b> <sup>17</sup> - DALI DT8 <b>RDD1</b> - Dual 0-10V input for CCT/intensity 120V <b>RLD2</b> <sup>17</sup> - Lutron DALI-2 digital	<b>NA</b> - None  <sup>20</sup> To specify an ENERGY STAR certified fixture, see page 3.  To specify a JAB compliant fixture, see page 4.

#### 2 - Light & Baffle (Example: AE4SRWWB-SW-14W-WW-2STP-90CRI-27K-TRM-WW-FTMW-FTMW-NA)

LUMINAIRE ID	LIGHT SOURCE	WATTAGE <sup>21</sup>	BEAM	COLOR QUALITY	CRI	COLOR TEMP.
	Specify same as Housing	Specify same as Housing				
<b>AE4SRWWB</b>			<b>WW</b>			
<b>AE4SRWWB</b> - Aera 4" Square Recessed Wall Wash	<b>SW</b> - Static white <b>FS</b> - Full spectrum static white  <b>SOLA</b> - Dim-to-warm single channel control <b>DUO</b> - Tunable white 2-channel control	<b>14W</b> - 14 W output, up to 763 lm <b>20W</b> - 20 W output, up to 1216 lm <b>28W</b> <sup>22</sup> - 28 W output, up to 1632 lm  <sup>21</sup> Lumen outputs are reduced with full spectrum, consult factory. <sup>22</sup> Not available with IC/CP/AT.  <b>SOLA</b> <sup>22</sup> <b>28W</b> - 28 W output, up to 1615 lm  <b>DUO</b> <sup>22</sup> <b>28W</b> - 28 W output, up to 1650 lm	<b>WW</b> - Wall wash  <b>2STP</b> <sup>23</sup> - 2 Step MacAdam Ellipse <b>3STP</b> - 3 Step MacAdam Ellipse  <sup>23</sup> Not available with full spectrum static white.  <b>3STP</b> - 3 Step MacAdam Ellipse	<b>2STP</b> <sup>23</sup> - 2 Step MacAdam Ellipse <b>3STP</b> - 3 Step MacAdam Ellipse  <sup>23</sup> Not available with full spectrum static white.  <b>3STP</b> - 3 Step MacAdam Ellipse	<b>80CRI</b> <sup>24</sup> - 80+ CRI <b>90CRI</b> <sup>24</sup> - 90+ CRI <b>95CRI</b> <sup>27</sup> - 95+ CRI  <sup>24</sup> Not available with full spectrum static white. <sup>27</sup> Not available with 2400K and 5000K.  <b>90CRI</b> - 90+ CRI	<b>24K</b> - 2400K <b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>50K</b> - 5000K  <b>SOLA</b> <b>30K18K</b> - 3000K to 1800K <b>27K18K</b> - 2700K to 1800K <b>DUO</b> <b>65K27K</b> - 6500K to 2700K <b>50K27K</b> - 5000K to 2700K
TRIM STYLE	LENS	BAFFLE FINISH	TRIM FLANGE FINISH	OPTION <sup>26</sup>		
Specify same as Housing			Specify NA for Trimless	<b>NA</b>		
<b>TRM</b> - Flanged trim <b>TLMW</b> - Trimless drywall mudplate <b>TLMW</b> <sup>25</sup> - Trimless millwork  <sup>25</sup> For remodel (RM) installation type, TLMW adapter must be installed from above the ceiling or before ceiling is installed.	<b>WW</b> - Wall wash diffuser	<b>FTMW</b> - Matte white <b>FTMB</b> - Matte black <b>FSPC</b> - Satin silver <b>FSSPC</b> - Matte silver <b>FCHP</b> - Champagne <b>FDBZ</b> - Dark bronze <b>FPF</b> - Primer finish <b>CF#</b> - Custom finish, specify RAL#	<b>FTMW</b> - Matte white <b>FTMB</b> - Matte black <b>FSPC</b> - Satin silver <b>FSSPC</b> - Matte silver <b>FCHP</b> - Champagne <b>FDBZ</b> - Dark bronze <b>FPF</b> - Primer finish <b>CF#</b> - Custom finish, specify RAL# <b>NA</b> - Not applicable	<b>NA</b> - None  <sup>26</sup> To specify an ENERGY STAR certified fixture, see page 3. To specify a JAB compliant fixture, see page 4.		

# AERA 4" DOWNLIGHT

## SQUARE RECESSED WALL WASH NEW CONSTRUCTION & REMODEL ENERGY STAR Order Guide



Project: \_\_\_\_\_  
Type: \_\_\_\_\_



### 1 - Housing (Example: AE4SRWW-TRM-SW-OF-ASB-120V-14W-D1-ES)

LUMINAIRE ID <sup>1</sup>	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTION <sup>2</sup>
<b>AE4SRWW</b>		<b>SW</b>		
<b>AE4SRWW</b> - Aera 4" Square Recessed Wall Wash  <sup>1</sup> Recessed (fixed) and Recessed Adjustable also available. Consult other spec sheets.	<b>TRM</b> - Flanged trim <b>TLMP</b> - Trimless drywall mudplate <b>TLMW</b> - Trimless millwork	<b>SW</b> - Static white	<b>OF</b> - Open Frame Type Non-IC <b>IC</b> - Type-IC <b>RM</b> - Remodel Type Non-IC <b>CP</b> - Chicago Plenum Type-IC (CCEA) <b>AT</b> - Airtight Type-IC	<b>ASB</b> - Adjustable standard bar hangers <b>FMB</b> - Flush mount bars <b>ACB</b> - Adjustable commercial bar hangers <b>AHC</b> - Adjustable hat channel bars <b>NA</b> - None  <sup>2</sup> See page 6 for more details.

VOLTAGE	WATTAGE	DIMMING	OPTION
	<b>14W</b>		<b>ES</b>
<b>120V</b> - 120V <b>277V</b> - 277V <b>UNV</b> - 120V-277V	<b>14W</b> - 14 W output, up to 763 lm	<b>INTEGRAL</b>  <b>D1</b> - 1% 0-10V <b>ELV</b> <sup>3</sup> - ELV 120V <b>TRI</b> <sup>3</sup> - TRIAC 120V  <sup>3</sup> Available with 120V only.	<b>REMOTE</b> <sup>4</sup>  <b>RD1</b> - 1% 0-10V <b>RELV</b> <sup>5</sup> - ELV 120V <b>RTRI</b> <sup>5</sup> - TRIAC 120V <b>RLDE1</b> <sup>6</sup> - Lutron Hi-lume 1% Eco  <sup>4</sup> A remote driver box is provided, see page 5 for details. <sup>5</sup> Available with 120V only. <sup>6</sup> On-site commissioning is required.

### 2 - Light & Baffle (Example: AE4SRWWB-SW-14W-WW-2STP-90CRI-27K-TRM-WW-FTMW-FTMW-ES)

LUMINAIRE ID	LIGHT SOURCE Specify same as Housing	WATTAGE Specify same as Housing	BEAM	COLOR QUALITY	CRI	COLOR TEMP.
<b>AE4SRWWB</b>	<b>SW</b>	<b>14W</b>	<b>WW</b>	<b>2STP</b>		
<b>AE4SRWWB</b> - Aera 4" Square Recessed Wall Wash	<b>SW</b> - Static white	<b>14W</b> - 14 W output, up to 763 lm	<b>WW</b> - Wall wash	<b>2STP</b> - 2 Step MacAdam Ellipse	<b>90CRI</b> - 90 CRI <b>80CRI</b> - 80 CRI	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K

TRIM STYLE Specify same as Housing	LENS	BAFFLE FINISH	TRIM FLANGE FINISH Specify NA for Trimless	OPTION
	<b>WW</b>			<b>ES</b>
<b>TRM</b> - Flanged trim <b>TLMP</b> - Trimless drywall mudplate <b>TLMW</b> - Trimless millwork	<b>WW</b> - Wall wash diffuser	<b>FTMW</b> - Matte white <b>FTMB</b> - Matte black <b>FSPC</b> - Satin silver <b>FSSPC</b> - Matte silver <b>FCHP</b> - Champagne <b>FDBZ</b> - Dark bronze <b>FPF</b> - Primer finish <b>CF#</b> - Custom finish, specify RAL#	<b>FTMW</b> - Matte white <b>FTMB</b> - Matte black <b>FSPC</b> - Satin silver <b>FSSPC</b> - Matte silver <b>FCHP</b> - Champagne <b>FDBZ</b> - Dark bronze <b>FPF</b> - Primer finish <b>CF#</b> - Custom finish, specify RAL# <b>NA</b> - Not applicable	<b>ES</b> - ENERGY STAR

# AERA 4" DOWNLIGHT

SQUARE RECESSED WALL WASH  
NEW CONSTRUCTION & REMODEL  
Title 24 JA8  
Order Guide



Project: \_\_\_\_\_  
Type: \_\_\_\_\_



## 1 - Housing (Example: AE4SRWW-TRM-SW-AT-ASB-120V-14W-D1-JA8)

LUMINAIRE ID <sup>1</sup>	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTION <sup>2</sup>
<b>AE4SRWW</b>		<b>SW</b>	<b>AT</b>	
<b>AE4SRWW</b> - Aera 4" Square Recessed Wall Wash  <sup>1</sup> Recessed (fixed) and Recessed Adjustable also available. Consult other spec sheets.	<b>TRM</b> - Flanged trim <b>TLMP</b> - Trimless drywall mudplate <b>TLMW</b> - Trimless millwork	<b>SW</b> - Static white	<b>AT</b> - Airtight Type-IC	<b>ASB</b> - Adjustable standard bar hangers <b>FMB</b> - Flush mount bars <b>ACB</b> - Adjustable commercial bar hangers <b>AHC</b> - Adjustable hat channel bars <b>NA</b> - None  <sup>2</sup> See page 6 for more details.

VOLTAGE	WATTAGE	DIMMING		OPTION
	<b>14W</b>			<b>JA8</b>
<b>120V</b> - 120V <b>277V</b> - 277V <b>UNV</b> - 120V-277V	<b>14W</b> - 14 W output, up to 763 lm	<b>INTEGRAL</b>  <b>D1</b> - 1% 0-10V <b>ELV</b> <sup>3</sup> - ELV 120V <b>TRI</b> <sup>3</sup> - TRIAC 120V <b>LDE1</b> <sup>4</sup> - Lutron Hi-lume 1% Eco  <sup>3</sup> Available with 120V only. <sup>4</sup> On-site commissioning is required.	<b>REMOTE</b> <sup>5</sup>  <b>RD1</b> - 1% 0-10V <b>RELV</b> <sup>6</sup> - ELV 120V <b>RTRI</b> <sup>6</sup> - TRIAC 120V <b>RLDE1</b> <sup>7</sup> - Lutron Hi-lume 1% Eco  <sup>5</sup> A remote driver box is provided, see page 5 for details. <sup>6</sup> Available with 120V only. <sup>7</sup> On-site commissioning is required.	<b>JA8</b> - JA8 compliant

## 2 - Light & Baffle (Example: AE4SRWWB-SW-14W-WW-2STP-90CRI-27K-TRM-WW-FTMW-FTMW-JA8)

LUMINAIRE ID	LIGHT SOURCE Specify same as Housing	WATTAGE Specify same as Housing	BEAM	COLOR QUALITY	CRI	COLOR TEMP.
<b>AE4SRWWB</b>	<b>SW</b>	<b>14W</b>	<b>WW</b>		<b>90CRI</b>	
<b>AE4SRWWB</b> - Aera 4" Square Recessed Wall Wash	<b>SW</b> - Static white	<b>14W</b> - 14 W output, up to 763 lm	<b>WW</b> - Wall wash	<b>2STP</b> - 2 Step MacAdam Ellipse <b>3STP</b> - 3 Step MacAdam Ellipse	<b>90CRI</b> - 90 CRI	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K

TRIM STYLE Specify same as Housing	LENS	BAFFLE FINISH	TRIM FLANGE FINISH Specify NA for Trimless	OPTION
	<b>WW</b>			<b>JA8</b>
<b>TRM</b> - Flanged trim <b>TLMP</b> - Trimless drywall mudplate <b>TLMW</b> - Trimless millwork	<b>WW</b> - Wall wash diffuser	<b>FTMW</b> - Matte white <b>FTMB</b> - Matte black <b>FSPC</b> - Satin silver <b>FSSPC</b> - Matte silver <b>FCHP</b> - Champagne <b>FDBZ</b> - Dark bronze <b>FPP</b> - Primer finish <b>CF#</b> - Custom finish, specify RAL#	<b>FTMW</b> - Matte white <b>FTMB</b> - Matte black <b>FSPC</b> - Satin silver <b>FSSPC</b> - Matte silver <b>FCHP</b> - Champagne <b>FDBZ</b> - Dark bronze <b>FPP</b> - Primer finish <b>CF#</b> - Custom finish, specify RAL# <b>NA</b> - Not applicable	<b>JA8</b> - JA8 compliant

# AERA 4" DOWNLIGHT

## SQUARE RECESSED WALL WASH NEW CONSTRUCTION & REMODEL



### Housing


#### INSTALLATION TYPES

OF - Open Frame Type Non-IC	IC - Type-IC	CP - Chicago Plenum Type-IC (CCEA) AT - Airtight Type-IC
RM - Remodel Type Non-IC		
Integral	Remote	


- For height dimension C, see the PLENUM CLEARANCE & CUT-OUT DIMENSIONS table below.
- For OF, IC, CP, and AT installation types with remote dimming, a remote driver box is provided.

#### REMOTE DRIVER BOX

RDB8 / RDB18 / RDB24




RDB24W

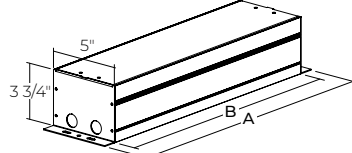

	RDB8	RDB18	RDB24	RDB24W
A	10"	20"	26"	26"
B	8"	18"	24"	24"
DRIVER	<b>RD1</b> - 1% 0-10V <b>RELV</b> - ELV 120V <b>RTRI</b> - TRIAC 120V <b>RPEQ0</b> - Lutron Hi-lume Premier 0.1% EcoSystem  <b>SOLA</b> <b>RSD1</b> - Single 0-10V input <b>RSELV</b> - ELV 120V <b>RSTRI</b> - TRIAC 120V	<b>RLDE1</b> - Lutron Hi-lume 1% Eco <b>RDA</b> - DALI <b>RELD1</b> - eldoLED 1% ECOdrive 0-10V <b>RELD0</b> - eldoLED 0.1% SOLOdrive 0-10V	Emergency battery (+EB) with the following driver options. <b>RD1+EB</b> - 1% 0-10V <b>RELV+EB</b> - ELV 120V <b>RTRI+EB</b> - TRIAC 120V  <b>DUO</b> <b>RDMX</b> - DMX <b>RDDA</b> - DALI DT6 <b>RDDA8</b> - DALI DT8 <b>RDD1</b> - Dual 0-10V input for CCT/intensity <b>RLD2</b> - Lutron DALI-2 digital	Emergency battery (+EB) with the following driver options. <b>RLDE1+EB</b> - Lutron Hi-lume 1% Eco <b>RDA+EB</b> - DALI <b>RELD1+EB</b> - eldoLED 1% ECOdrive 0-10V <b>RELD0+EB</b> - eldoLED 0.1% SOLOdrive 0-10V

#### PLENUM CLEARANCE & CUT-OUT DIMENSIONS

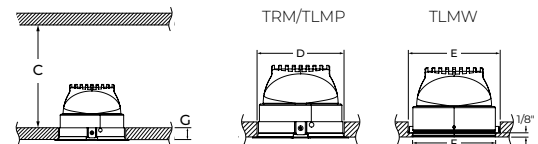

		PLENUM CLEARANCE HEIGHT	
		REMOTE & INTEGRAL	
		D1/ELV/TRI	LDE1/DA/ELD1/ELDO/PEQ0
C	OF	4 1/8"	6"
	IC	4" (14 W) 6 3/8" (20 W)	6 3/8"
	CP/AT	4 7/8" (14 W) 6 7/8" (20 W)	6 7/8"
	RM	4 1/8"	NA
CUT-OUT DIMENSIONS			
D	TRM/TLMP	4 1/2" x 4 1/2"	
E	TLMW	4 1/2" x 4 1/2"	
F		4 1/16" x 4 1/16" with 1/8" lip	
MAXIMUM CEILING THICKNESS			
G	TRM/ TLMP	1 3/8"	
	TLMW	5/8"	

# AERA 4" DOWNLIGHT


SQUARE RECESSED WALL WASH  
NEW CONSTRUCTION & REMODEL



## Housing


### MOUNTING OPTIONS

#### ASB - Adjustable Standard Bar Hangers

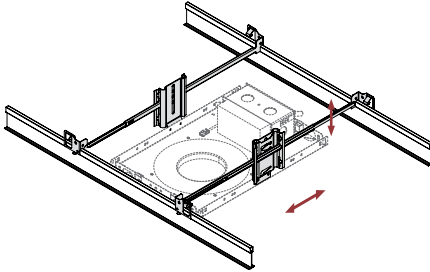


Adjustable Standard Bar hangers can be used in both commercial and residential applications and are adjustable to various heights in both Grid Ceiling and Drywall mounting. ASB hangers are less rigid and versatile than ACB hangers.

#### FMB - Flush Mount Bars

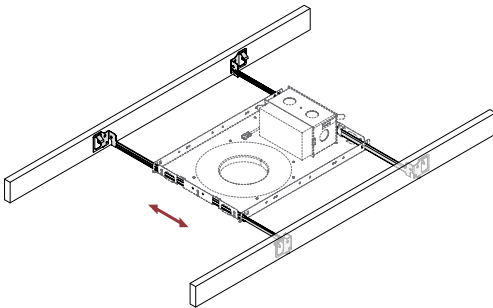

Flush Mount Bars are best used in residential applications, fitting snug to the surface and suitable for Wood, Metal, and Drywall mounting. The flush mounted bars are static and can't be adjusted.


#### ACB - Adjustable Commercial Bar Hangers

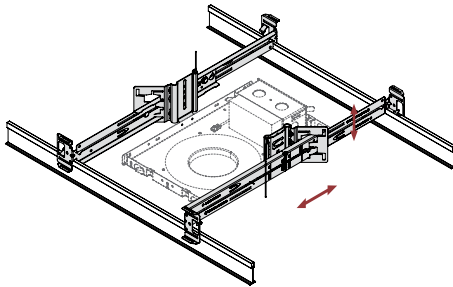

Adjustable Commercial Bar hangers can be used in both commercial and residential applications and are by far the most versatile mounting bar we offer with its adjustability to various heights. ACB hangers are suitable for Grid Ceiling, Drywall, Metal, Wood and Frame mounting.

- Extremely rigid
- Fits into C-Channel notches in a Butterfly Bracket

#### AHC - Adjustable Hat Channel Bars

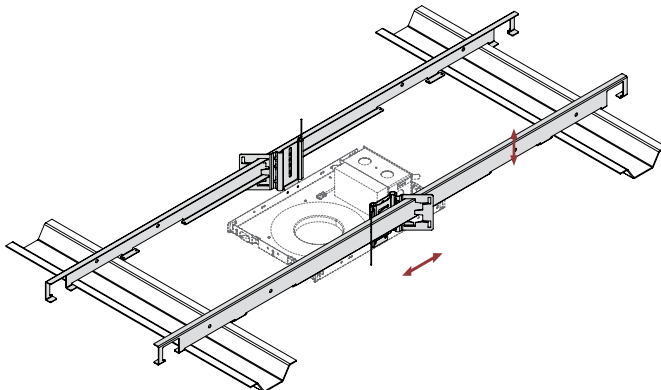


Adjustable Hat Channel bars can be used in both commercial and residential applications and come with a butterfly clip to adjust to various heights. AHC bars can be hung downward by 90 degrees in vertical position, and once wired, can be shifted onto the horizontal mounting plane. AHC bars are suitable for both Drywall and wood ceiling applications.

# AERA 4" DOWNLIGHT



SQUARE RECESSED WALL WASH  
NEW CONSTRUCTION & REMODEL

## Light & Baffle

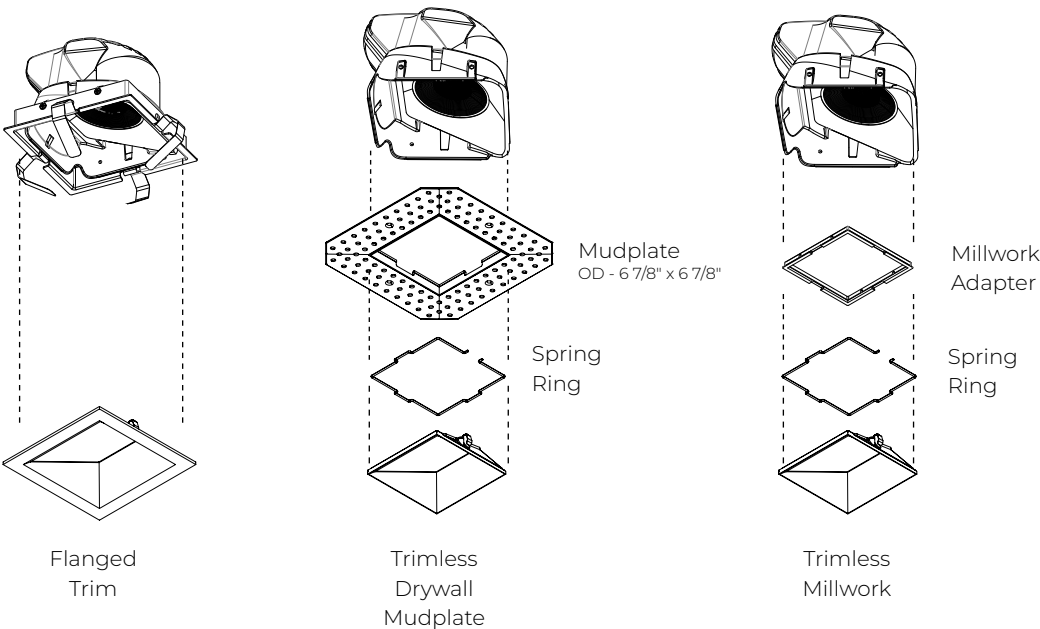

Wall Wash	
TRM Flanged Trim	TLMP/TLMW Trimless Drywall Mudplate /Trimless Millwork

# AERA 4" DOWNLIGHT


SQUARE RECESSED WALL WASH  
NEW CONSTRUCTION & REMODEL



## Color Quality


### COLOR QUALITY - 3500K

TM-30 R <sub>t</sub>	90
TM-30 R <sub>g</sub>	100
CRI	90
R9	> 50



## Photometrics

Values calculated with white wall wash baffle, and based on 3500K for static white.



### STATIC WHITE

CRI	90 CRI		95 CRI		80 CRI	
	lm	lm/W	lm	lm/W	lm	lm/W
14 W	713	51	549	39	763	54
20 W	1136	57	875	44	1216	61
28 W	1525	54	1174	42	1632	58

### SOLA

		lm	lm/W
28 W	3000K	1615	58
	2700K	1615	58

### DUO

		lm	lm/W
28 W	6500K	1650	59
	5000K	1650	59
	2700K	1450	52

## MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. CCT and baffle colors will change the lumen value.

CCT		BAFFLE STYLE AND COLOR	
STATIC WHITE		Flanged trim	1
2400K	0.87	Trimless	1
2700K	0.94	White	1
3000K	0.98	Black	1
3500K	1		
4000K	1.05		
5000K	1.05		



# AERA 4" DOWNLIGHT

## SQUARE RECESSED WALL WASH


### NEW CONSTRUCTION & REMODEL



### Photometrics

UNIFORMITY  
Values calculated based on 3500K and white wall wash baffle.

24" from Wall - 36" Spacing

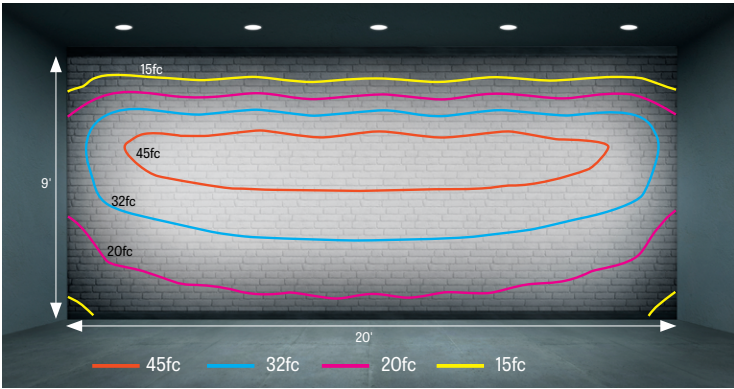

### Foot-candles

FC ON WALL		24" FROM WALL - 24" SPACING			24" FROM WALL - 36" SPACING			24" FROM WALL - 48" SPACING			24" FROM WALL - 60" SPACING		
ABOVE FINISHED FLOOR	9'	90 CRI	95 CRI	80 CRI	90 CRI	95 CRI	80 CRI	90 CRI	95 CRI	80 CRI	90 CRI	95 CRI	80 CRI
	8'	11	9	12	7	5	7	6	5	6	5	4	6
	7'	51	39	54	31	24	33	27	20	28	25	19	26
	6'	70	54	74	45	34	48	36	28	39	33	25	35
	5'	61	47	65	40	31	43	31	24	33	27	21	29
	4'	47	36	50	31	24	34	24	18	25	20	15	21
	3'	36	28	39	25	19	26	18	14	20	15	12	16
	2'	29	22	31	20	15	21	14	11	15	12	9	13
	1'	24	18	26	16	13	18	12	9	13	10	8	11
		21	16	22	14	11	15	10	8	11	9	7	9

# AERA 4" DOWNLIGHT


## SQUARE RECESSED WALL WASH NEW CONSTRUCTION & REMODEL



### Technical Specifications

#### OPTIC

XPoint™ Refraction Technology optics provide precise optical control in a remarkably compact form. Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.

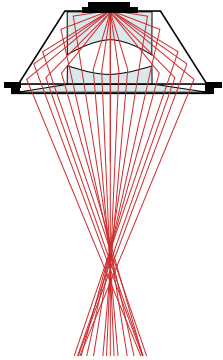

#### LIGHT SOURCE

##### Static white

Compact COB (Chip-On-Board) LED module, available in 2400K, 2700K, 3000K, 3500K, 4000K, and 5000K with a choice of 80 CRI, 90 CRI, or 95 CRI, with elevated R9 value for 90 CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

##### Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region which helps increase Cyanosis Observation Index (COI) and assist in regulating circadian rhythms. The cyan region in full spectrum LED is richer at the 480 nm range.

##### Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. Two color temperature range options are offered: 3000K to 1800K, and 2700K to 1800K. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

##### Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool to warm LED arrays - maintaining a CRI above 90. Two color temperature range options are offered: 6500K to 2700K, and 5000K to 2700K. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

#### ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency >84%, PF >0.9, THD <20%.

**Integral:** 0-10V, ELV, TRIAC, Lutron Hi-Lume 1% EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron DALI-2 digital

**Remote:** 0-10V, ELV, TRIAC, Lutron Hi-Lume 1% EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron DALI-2 digital

**Emergency battery options - Integral:** Factory installed, long-life, high-temperature, LED driver with integrated emergency backup using a recyclable LiFePO4 battery pack. Features a remote test switch with charge indicator, minimum of 90 minutes operation and 10 W per downlight emergency lighting output. Recharge time of 12 hours.

**Emergency battery options - Remote:** Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10 W, the battery provides 6 W of emergency light output. For fixtures 10 W and over, the battery provides 10 W.

#### PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

# AERA 4" DOWNLIGHT

## SQUARE RECESSED WALL WASH NEW CONSTRUCTION & REMODEL



### CONSTRUCTION

#### Housing

For new construction, 20 gauge powder coated steel. Open frame, type-IC, or Chicago Plenum (CCEA) rated. 18 gauge galvanized steel junction box with ½" trade size knockouts. Adjustable hanger bars and butterfly brackets are included. Adjustable commercial hat channel and flush mounted brackets are also available.

#### Light element

**LED module:** Integral COB module. 90 CRI and 2 SDCM, Standard with options of 80 CRI, or 95 CRI. L80 > 60,000 hours.

**XPoint™ Refraction Technology optic:** Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.

**Thermal management:** Die-cast aluminum heat sink to maximize thermal dissipation.

**Baffle:** Die-cast aluminum mounted with retaining spring clips

**Trim style:** Trimmed and trimless with mudplate or millwork adapter

**Finish:** Matte white, matte black, satin silver, matte silver, champagne, dark bronze, and primer finish. Custom colors also available (provide RAL #). For the primer finish option, fixture must be turned off and the lens masked before applying paint.

### WEIGHT

**Open frame:** 4.5 lbs - 2 kg

**Type-IC/Chicago Plenum:** 8 lbs - 3.6 kg

**Remodel:** 3.5 lbs - 1.6 kg

### ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

### CERTIFICATIONS

**ETL:** Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

**Chicago Plenum:** City of Chicago approved (CCEA) when specified with CP installation type option.

**IC rated:** Suitable for direct contact with insulation when specified with IC, CP or AT installation type options.

**ENERGY STAR:** ENERGY STAR certified

**Title 24 JA8:** California Building Standards Code

**Declare:** [LBC Red List Approved](#)

### WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.