


IMPORTANT: Installation instructions are shown for Selka with LIG and applies to all Selka configurations.


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

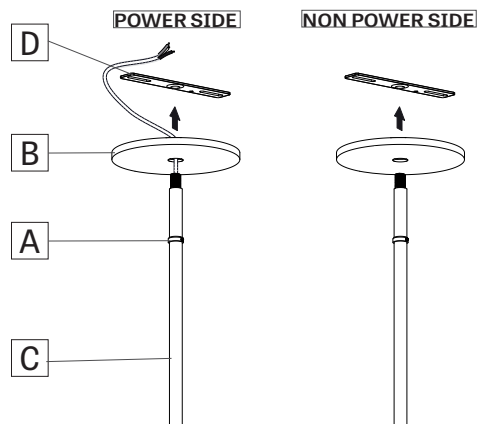


Make sure that the power to the fixture is turned off. Slide the slip ring (A) and the canopy (B) onto the stem (C) and leave some space. Screw the junction box crossbar (D) onto the stem (C).

2 FOR EMERGENCY CIRCUIT

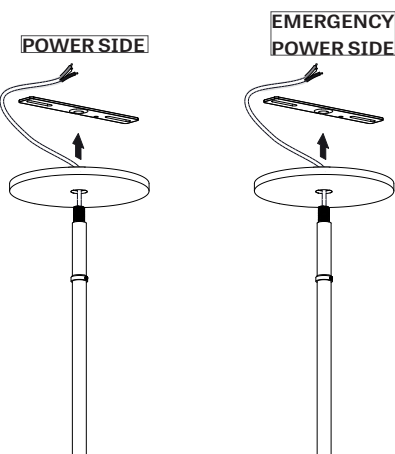


In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

3 FOR FIXTURE IN GRID CEILING

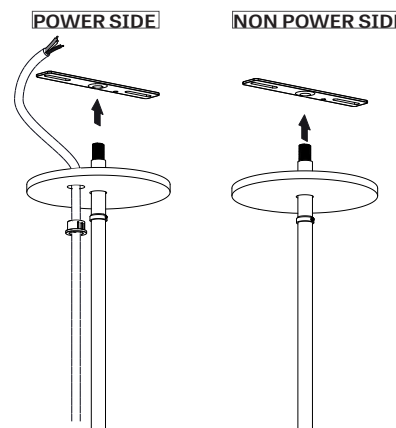


In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.

4

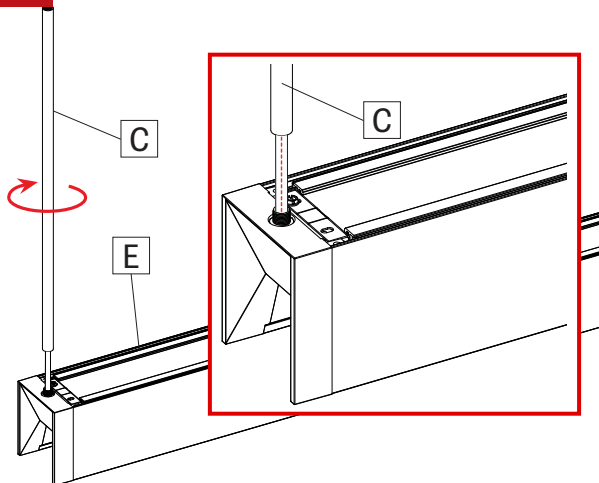


Screw the stems (C) on the first fixture (E). Then install it on the second fixture.

5 POWER SIDE

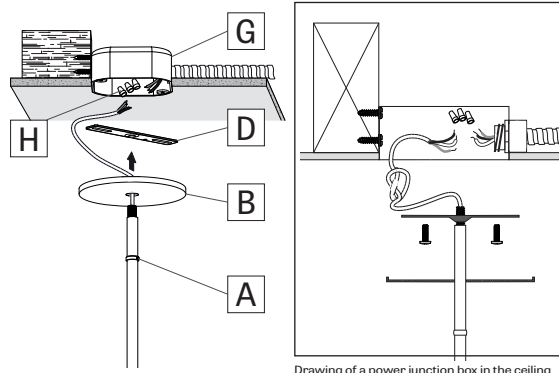


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Make wire connection with electrical marettes (H). Then slide the canopy (B) and thighten the set up with the slip ring (A).

6 NON POWER SIDE

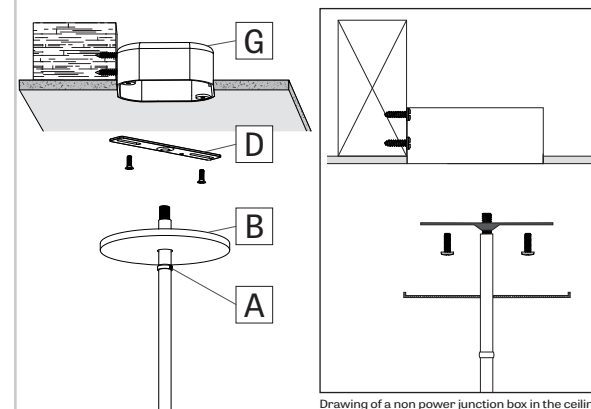


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Then slide the canopy (B) and thighten the set up with the slip ring (A).


7 CONTINUOUS SYSTEM

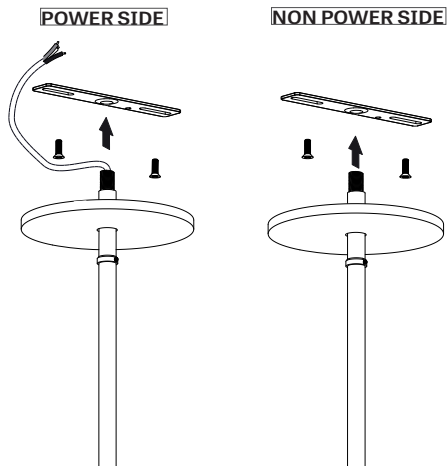


For a continuous system, repeat steps 1 to 6 for all mounting hardware.

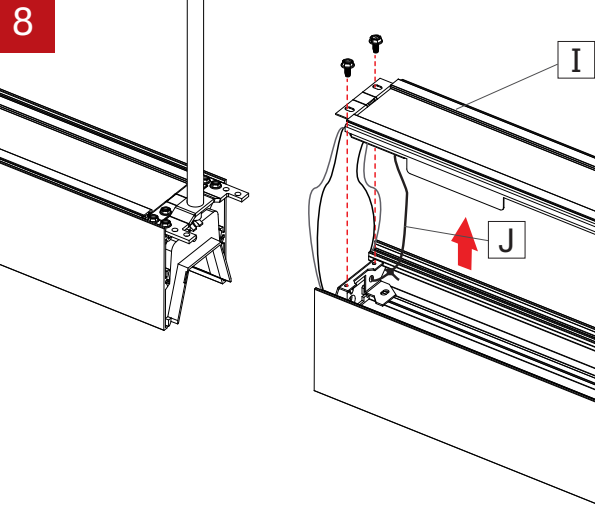


Pull off all the end cartridges (I) of the following fixtures in the run and let them hang to the side via safety cables (J).

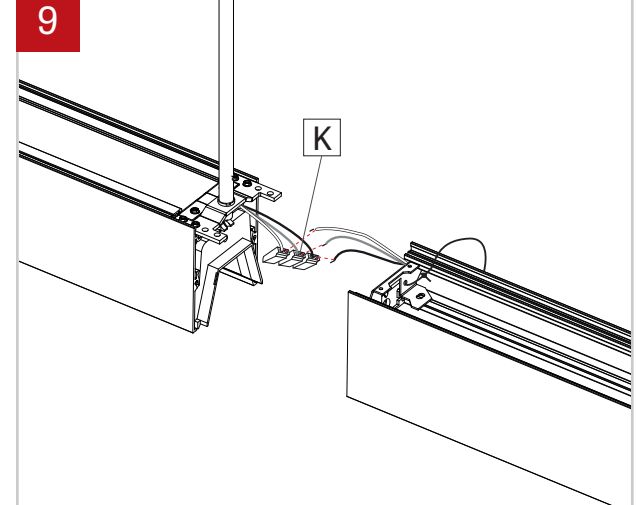


Connect wires between joining fixtures using quick connectors (K). Push wires inside the second fixture.

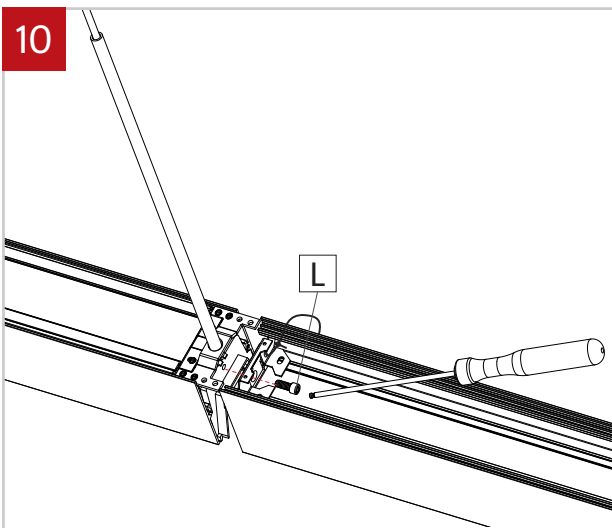

Secure fixtures together with supplied set screws (L). Repeat steps 7 to 10 for all following fixtures in the run.

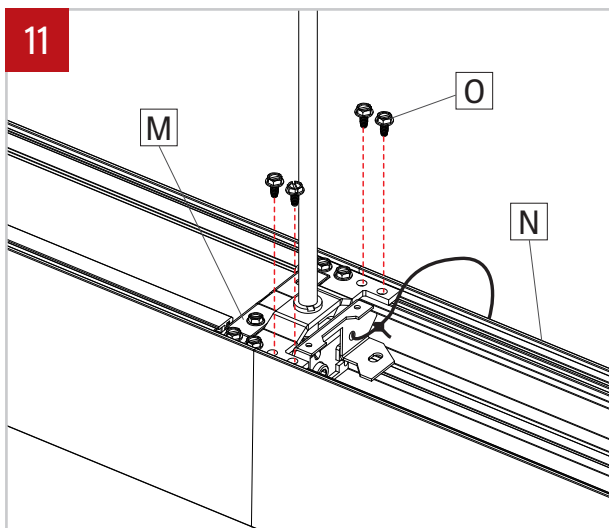

Fix the cover bracket (M) to the second fixture (N) with provided screws (O).

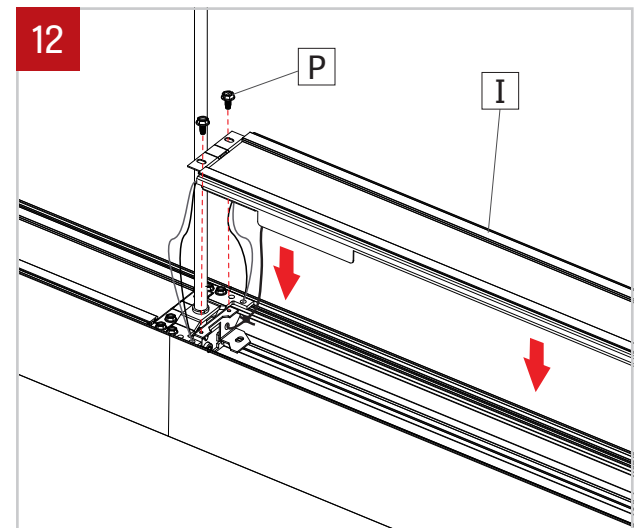

Reinstall the cartridges (I) by using screws (P).