


IMPORTANT: Installation inst. are shown with Shalo 3 S and apply to the Shalo 3 V and T as well


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

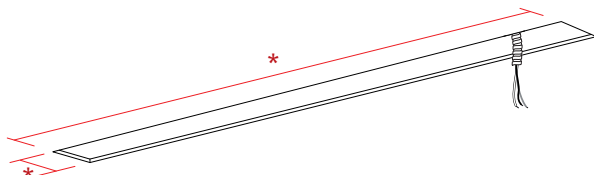


Frame around the area where the fixture will be installed. Leave a hole in the drywall according to the dimensions [*] given in the client drawings.

2

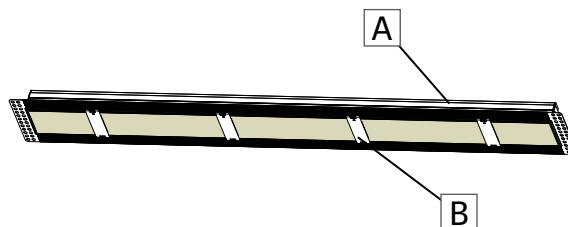

Make sure the power to the fixture (A) is turned off. Do not remove the lens protective tape or the spacer brackets (B) before installing the fixture in the ceiling. The spacer brackets (B) are meant to keep the opening of the fixture until it is attached in the ceiling


3

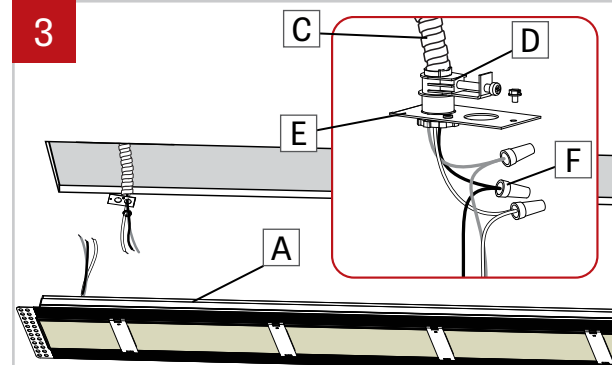


Install BX cable (C) (by other) through the BX connector (D) (by other) and install onto the power plate (E) provided. Make electrical connections between BX cable (C) and fixture cables using electrical marettes (F). Reinstall the power plate (E) to the fixture (A).

Note: Wire 0-10VDC dimming leads as Class 1.

4

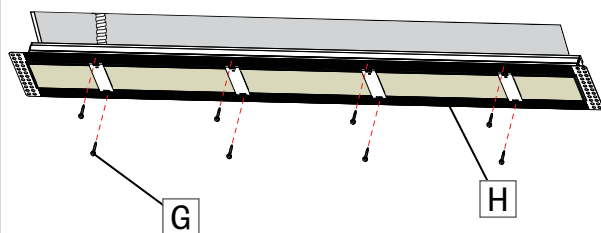


Fasten drywall screws (G) (by others) through the holes of the flanges (H).

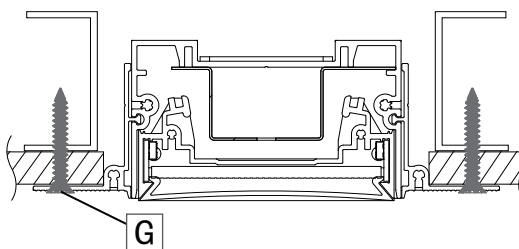


Make sure the mounting screws (G) are well tightened. Framing around the fixture is necessary for a good installation.

5

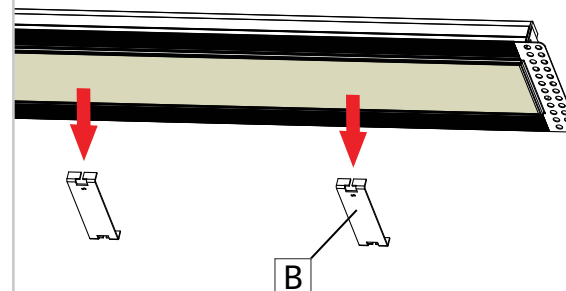


Once fixture is attached to the ceiling, remove the spacer brackets (B).

6

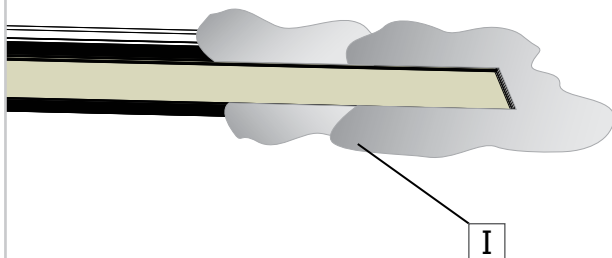

Plaster and sand over mud flange (I) to create a smooth finish.


7

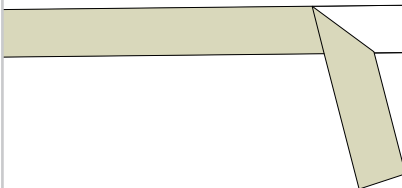

Once the mud is totally dry and painted, remove gently the lens cover.


8

CONTINUOUS SYSTEM

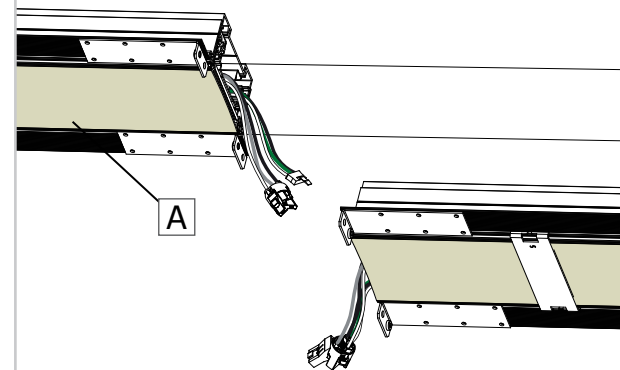


For a continuous system, follow steps 1 to 5 for the first fixture (A) in the run.

9

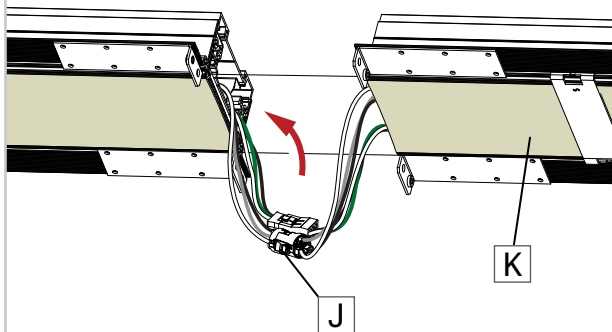


Connect the quick connectors (J) between the first two sections. Push the quick connectors inside the first section. Insert the second section (K) into the drywall hole

10

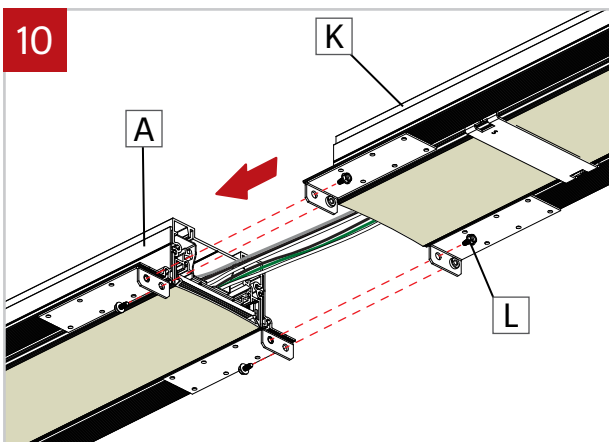


Slide the second fixture (K) against the fixture (A). Make sure there are no electrical wires caught between the 2 fixtures. There should be no gap between the 2 aluminum extrusions. Attach the 2 fixtures together by fastening the joiner screws (L) provided.

11

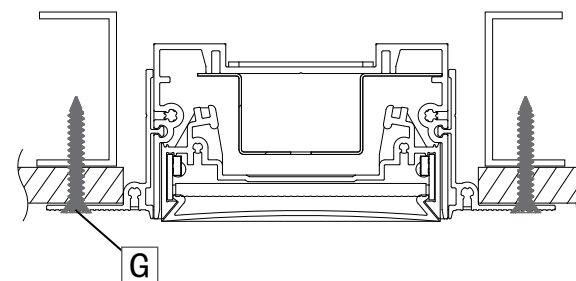


Fasten the second fixture to the ceiling using drywall screws (G) (by others). Make sure the mounting screws (G) are well tightened.

12

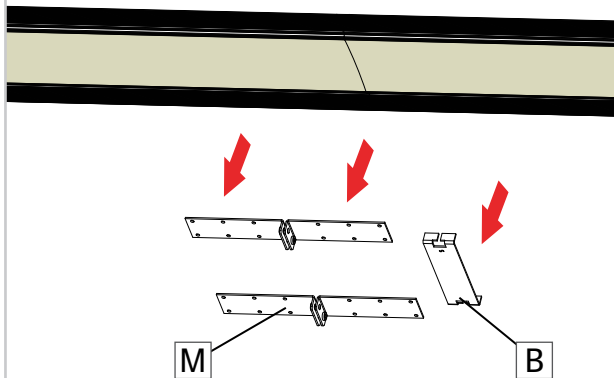


Once fixture is attached to the ceiling, remove the spacer brackets (B) and the joiners (M).

13

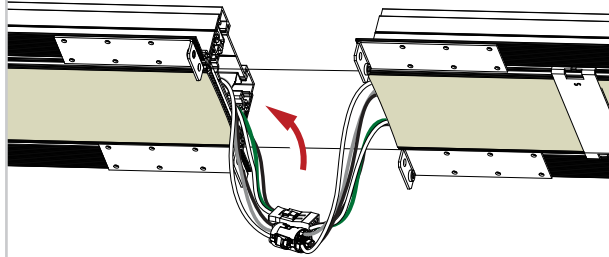


Repeat steps 9 to 12 for all remaining fixtures in the run.

14

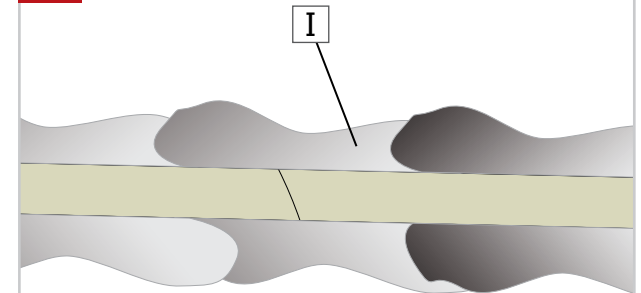

Plaster and sand over mud flange (I) to create a smooth finish.

15

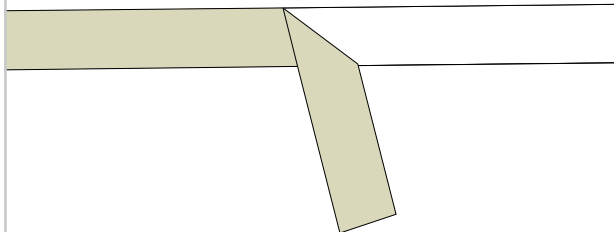

Once the mud is totally dry and painted, remove gently the lens covers.