


IMPORTANT: Installation inst. are shown with Shalo 3 S and apply to the Shalo 3 V and T as well


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

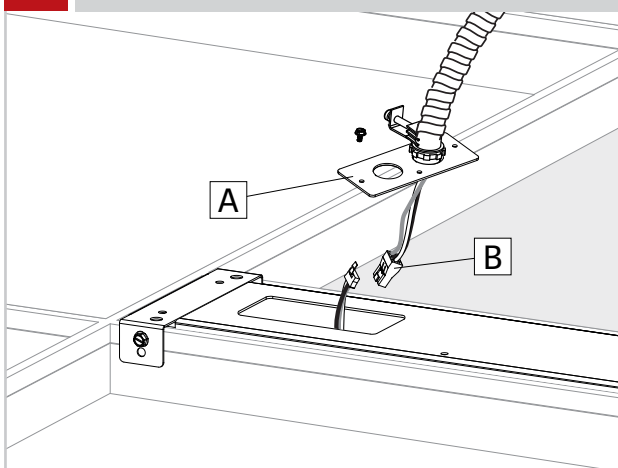


Remove the power plate (A). Disconnect the quick connectors (B) between the driver and BX cable.

2

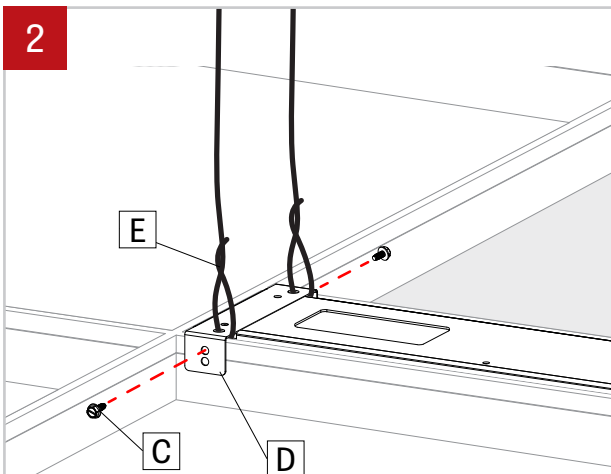


Unscrew and remove the screws (C) from the brackets (D). Remove the wires (E) from structure.

3

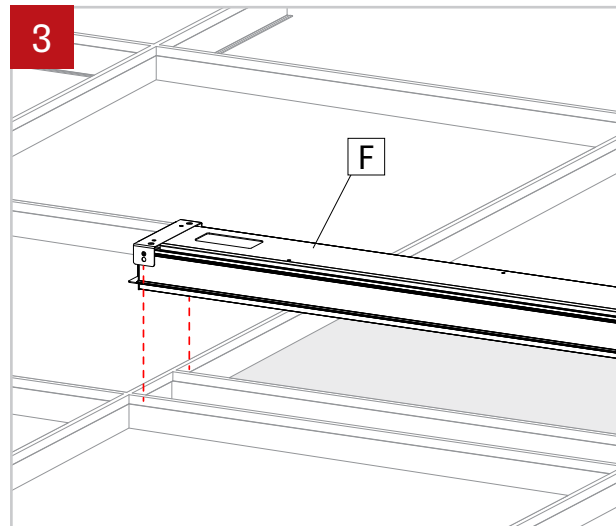


Remove the fixture and replace the fixture (F).

4

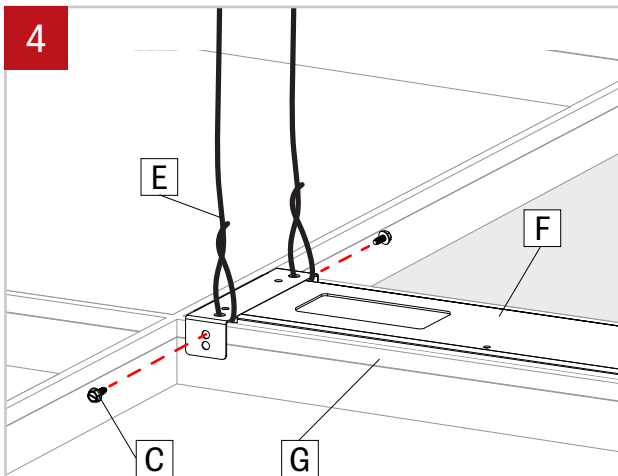


Fix the fixture (F) to the T-Bars (G) with screws (C) (by others). **Optional: Secure the fixture from structure above using wires (by others) (H).**

5

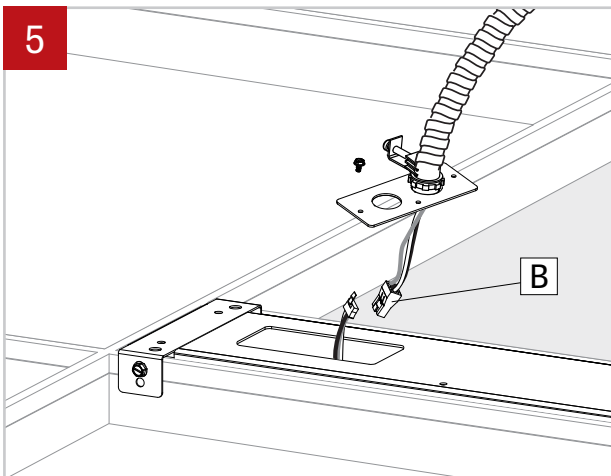


Connect the quick connectors (B) between the driver and BX cable.

6

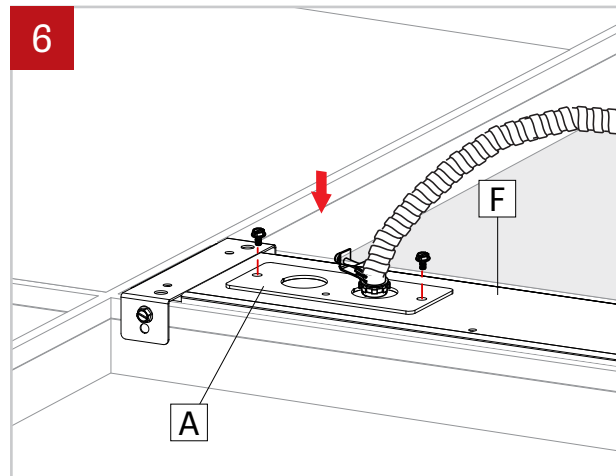


Push connected wires inside the fixture. Reinstall power plate (A) onto fixture (F) by refastening screws to power plate (A) and fixture (F).

7 CONTINUOUS SYSTEM / FIRST FIXTURE

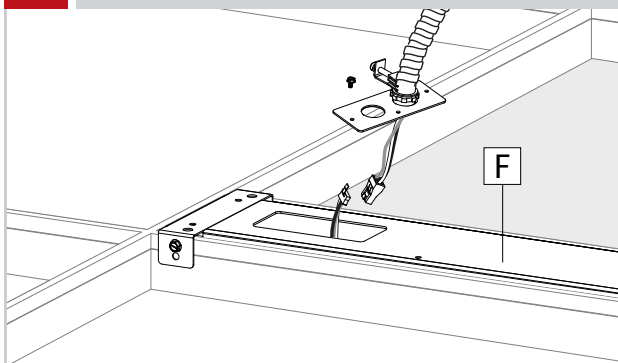


For the first fixture (F) in a run, repeat step 1 and 2.

8

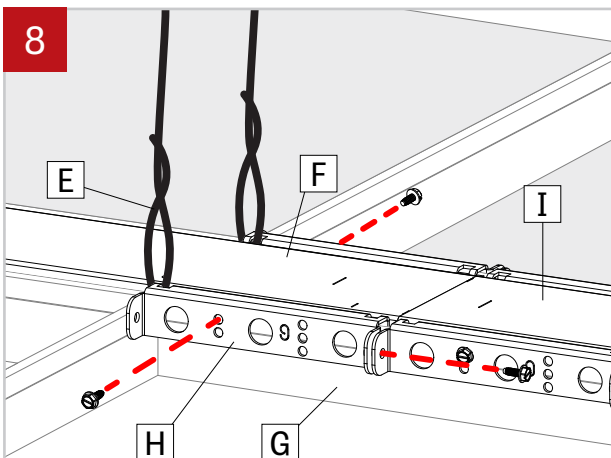


Unscrew the brackets (H) from the T-Bars (G). Remove the wires (E) from the brackets (H). Unscrew the fixture (F) that needs to be replaced from the another one (I).

9

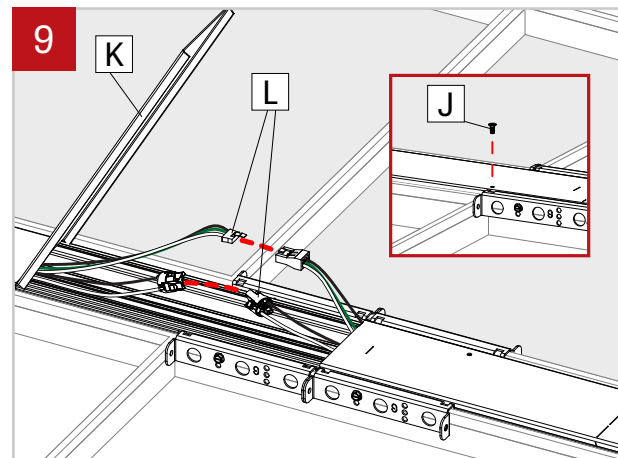

Unscrew and remove the screw (J) and lift the end of the aluminum cover (K). Disconnect the quick connectors (L).


10

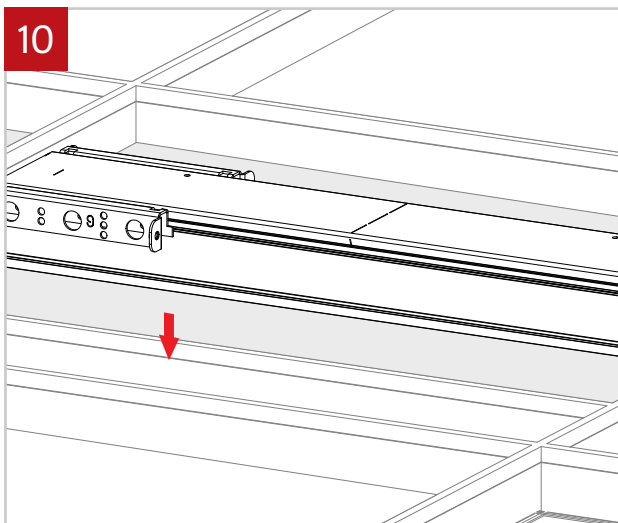

Remove the fixture and replace the fixture.


11

FIRST FIXTURE

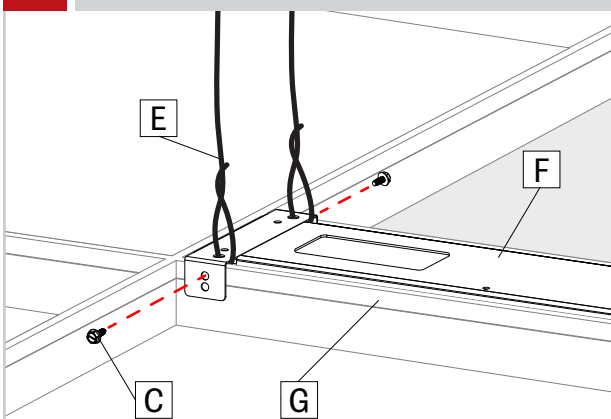

For the first fixture (F) in a run, repeat step 4 to 6.

12

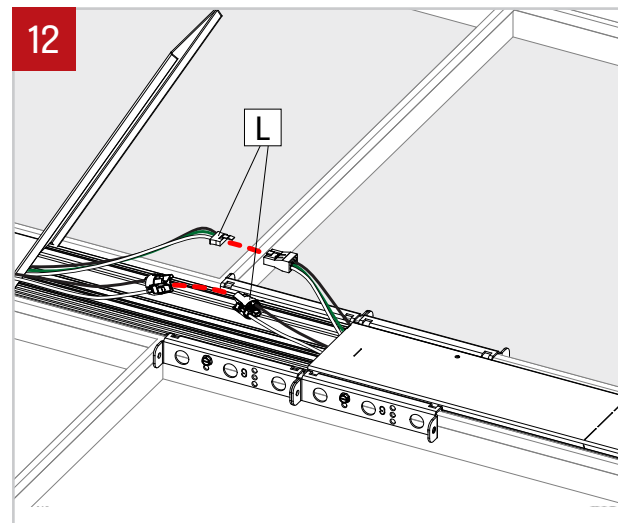

Connect the quick connectors (L) to make electrical connections.

