

TOGO 48 PENDANT

LUMENWERX
WWW.LUMENWERX.COM



DESCRIPTION

Togo provides generous ambient illumination from a minimal and elegant ring form. Nestled in a crisp 4" high opaque band, the distinctive, annular diffuser glows inwardly. The diffuser's softly rounded compound curve lends Togo a slender appearance. Available in 18", 24", 36" and 48" diameters. Togo delivers efficient, widespread, direct/indirect illumination (65/35) with spacing criteria of 1.6 and a range of light outputs.

Togo's outer housing of extruded aluminum is welded and buffed to a seamless band that can be painted in our nine standard finishes, or an RAL custom color, to coordinate with virtually any interior finish.

The Togo driver mounts remotely, either above or below the ceiling. In addition to a conventional power cord, Togo also offers an ultra-clean mounting detail with integrated and power suspension cables.

Controls include dimming to 1% in 0-10V, line voltage, and digital protocols. Night light and emergency circuiting are available.

Togo supports the full range of Chromawerx Sola, Duo, and Quadro options for tunable white and RGBW expressive color.



Please see code on page 2 for all nine standard finishes.

LUMENWERX
WWW.LUMENWERX.COM

PROJECT: _____
TYPE: _____
NOTES: _____

| TOGP | 48IN | ULO | | 90 |
|---------------------|--------------|--------------------------------|---|------------|
| LUMINAIRE ID | SIZE | OPTIC | LIGHT SOURCE | CRI |
| TOGP - Togo Pendant | 48IN - Ø 48" | ULO - Uniform Lambertian Optic | SW - Static white SOLA - Dim-to-warm single channel control 22K to 35K DUO - Tunable white 2 channel control 27K to 65K QUADRO - Four-channel RGB with 3500K white | 90 - 90CRI |

| | | | | 1 |
|--|---|--|---|---|
| LUMEN PACKAGES | COLOR TEMP. ² | VOLTAGE | DRIVER | ELECTRICAL |
| <p>#####lm - L5000lm - M7000lm - H9000lm</p> <p>L-Low, M-Medium, H-High, consult factory for other (static white, Duo and Sola only)</p> <p>109W ¹ - 109W output (Quadro only)</p> | <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>40 - 4000K</p> | <p>120 - 120V</p> <p>277 - 277V</p> <p>UNV - 120V-277V</p> <p>347V ³ - 347V</p> | <p><u>Static white</u></p> <p>D1 - 1% 0-10V</p> <p>DA ⁴ - DALI</p> <p>LDE1 ⁴ - Lutron Hi-lume 1% Eco</p> | <p>1 - 1 circuit</p> |
| <p>¹ Two power cords will be required.</p> | <p>² Not applicable for Duo, Sola and Quadro.</p> | <p>³ Available with D1 and RDB only.</p> | <p><u>Sola</u></p> <p>SD1 - Single 0-10V input</p> <p><u>Duo</u></p> <p>DD1 - Dual 0-10V input for CCT/intensity</p> <p>DA ⁴ - DALI</p> <p>PSQ0 ⁴ - Lutron T-series 1% Tunable White</p> <p>DMX ^{4,5} - DMX</p> <p><u>Quadro</u></p> <p>DMX ^{4,5} - DMX</p> | |
| | | | | <p>⁴ On-site commissioning is required.</p> <p>⁵ To specify, see pages 7 to 13.</p> |

| MOUNTING | | | | FINISH | OPTIONS |
|---|--|--|--|--|---|
| DRIVER BOX ⁶ | CANOPY FINISH | POWER | HEIGHT ¹² | W - Matte white AL - Aluminum BK - Black RAL 1028 - Yellow RAL 2004 - Orange RAL 3020 - Red RAL 4010 - Magenta RAL 5002 - Blue RAL 6018 - Green CF# - Custom finish, specify RAL# | TPF - Top plate finish, specify if differs from white |
| RCD ^{7,9} - Round Canopy Driver Box RDB - Remote Driver Box | AL - Aluminum B - Black W - Matte white CF# - Custom finish, specify RAL# | POC ^{10,11} - Integrated suspension power-over-aircraft cable BAC - Black power cord + aircraft cable WAC - White power cord + aircraft cable ¹⁰ For more information, see page 3. ¹¹ Not available with DMX. | ##IN - Distance from the canopy to the fixture in inches ¹² Minimum mounting heights: - With RCD: 37" - With RDB: 39.25" | | |
| See website for the Pendant Mounting Guide | | | | | |

See page 3 for ordering code detailed information

To specify see pages 7 to 13

To specify see pages 7 to 13



TOGP - Togo Pendant

TOGP - Togo Pendant

TOGO48-PENDANT-SPEC-REV4

Page: 2 / 13

February 14, 2024

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification




TOGO 48 PENDANT

MOUNTING OPTIONS



All mounting options below are available with either conventional aircraft cables and jacketed Class II power cord (CPC), or elegant integral power-over-aircraft cables (POC).

ROUND CANOPY DRIVER BOX





RCD - Round Canopy Driver Box
Driver is furnished in a 6" or 9" diameter, 2" deep enclosure that also supports suspension and power cables. Enclosure is available in standard finishes (see ordering code).

REMOTE DRIVER BOX IN DRYWALL



RDB - Drywall Remote Driver
Driver is in a 20"x4"x2" enclosure with brackets for mounting to ceiling joists or other supporting members. The 5 1/2" diameter x 1 5/8" deep wiring compartment canopy conceals and supports suspension and power cables. It is available in standard finishes (see ordering code).

REMOTE DRIVER BOX IN GRID



RDB - Ceiling Remote Driver for grid ceiling
Driver is in a 20"x4"x2" enclosure with brackets for mounting to ceiling runners. The 5 1/2" diameter x 1 5/8" deep wiring compartment conceals and supports for suspension and power cables.

INTEGRATED SUSPENSION AND POWER-OVER-AIRCRAFT CABLE (POC)


The integrated suspension and power-over-aircraft cable option provides an elegant mounting option without the familiar jacketed power cord.

Current from the driver to the LED arrays flows through seven-strand galvanized copper conductors. A dielectric polymer coating insulates the cable, which is supported by insulated holders at the ceiling and luminaire mounting plate.

Our standard integrated power-over-cable supports all dimming and control protocols available through the driver options without additional conductors.



Seven-strand galvanized copper conductors.
Cable diameter - 0.06" (1.55mm)

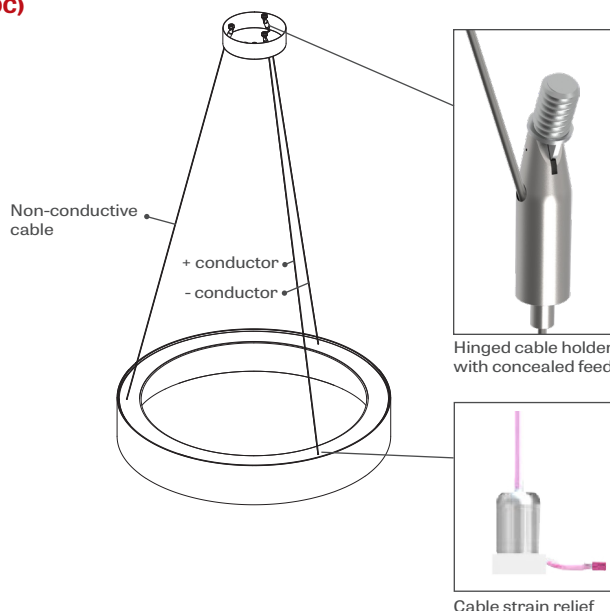

TOGO 48 PENDANT

OPTIC

Uniform Lambertian Optic (ULO) - Thermoformed from seamless impact-modified white PMMA, the ULO optic provides even luminosity, with up to 88% transmission. The tapered, compound curve minimizes the luminaire form.

Combined with the LED array running around the inside of the supporting band, the annular form and ULO optic creates a widespread 67% direct and 33% direct light distribution with spacing criteria of 1.6.

LIGHT SOURCE - LED - STATIC WHITE

Custom array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K, and 4000K with 90 CRI with elevated R9 value. Color consistency is maintained to 3 SDCM. LEDs are operated at a reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and results have shown L80 lumen maintenance are greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

PERFORMANCE AT 4000K

| LED output | Color Temp | Watts | Nominal Delivered Lumens | Efficacy LPW |
|---------------|------------|-------|--------------------------|--------------|
| low output | 4000K | 51.5 | 5000 | 97 |
| medium output | 4000K | 74.5 | 7000 | 94 |
| high output | 4000K | 99 | 9000 | 91 |

CHROMAWERX - TUNABLE WHITE


Custom linear array of alternating color temperature mid-flux LEDs are mounted directly to the housing for optimal thermal performance. For the Duo products, a color temperature range from 2700K-6500K is achievable with color points on or below the black body curve. For the Sola products, a color temperature range from 2700K-3500K is controlled synchronously with intensity. Color consistency between fixtures is maintained within 3SDCM. LEDs are operated at a reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance are greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Chromawerx Sola is a single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple digital or analog control sends a common signal to dual output digital drivers, which are programmed to adjust a specially populated LED array to emulate the effect of dimming a filament source. Dimming range is programmable, but the default option runs from 3500K at 100% full power to 2200K at 5% full power.

Chromawerx Duo is a two-channel control. It uses analog or digital protocols for synchronous control of both warm and cool LED arrays, enabling the user to set color temperature and light output. Commonly called "tunable white", Chromawerx two-channel control provides the range of warm (2700K) to cool (6500K) color that can be useful for helping to entrain circadian rhythms, stimulate alertness for improved educational and work productivity, and compensate for jet lag, among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures.


ANSI C78.377-2015

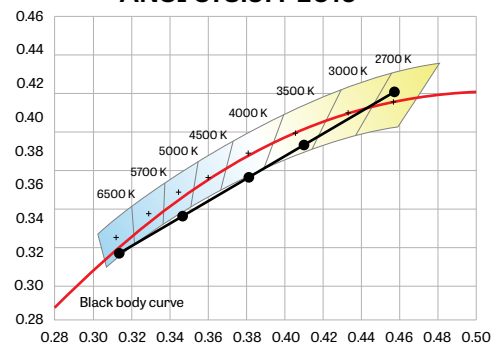

TOGO 48 PENDANT

CHROMAWERX - RGBW

Chromawerx Quadro is a four-channel control that operates an RGBW LED array and addresses the need for more expressive color in architectural applications. The DMX driver supports familiar programming tools for both dynamic multi-hued color and precise white color point control. While a typical user interface will be a DMX controller by others, Lumenwerx also offers a simple control station for stand-alone color changing applications.

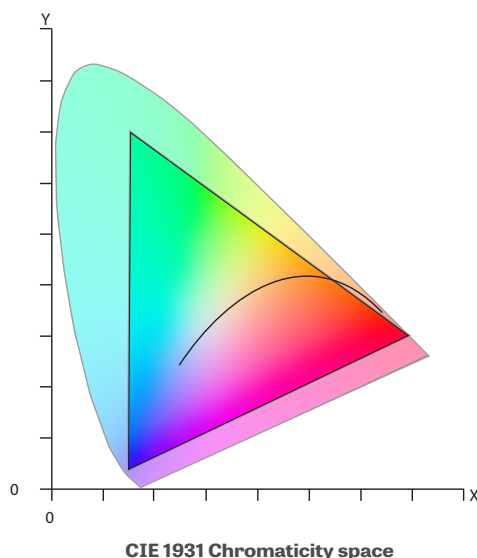

ELECTRICAL REMOTE

All remote drivers are furnished with factory enclosure for recessed installation in drywall and grid ceilings.

DALI (Duo Only)

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using an existing DALI control system (supplied by others), one control channel adjusts the fixture color temperature, and the other control channel adjusts fixture brightness. Dimming range from 100%-0%. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

0-10V (Sola)

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using a single 0-10V control signal, the fixture warms in color temperature as it dims down to 1% and 2200K. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

0-10V (Duo)

Factory-set adjustable output current LED driver with universal (120-277VAC) input. Controlled via two individual 0-10V signals, one for setting the intensity of the fixture down to a minimum of 1% and the other for adjusting the CCT of the fixture (default range of 2700K-6500K). Rated life of 50,000 hours at 70°C maximum driver case temperature and 100% load conditions. Typical efficiency of 86%, PF>0.9, THD<20% at 100% load conditions.

DMX (Quadro & Duo only)

Factory-set, adjustable output current, multi-channel LED driver with universal (120-277VAC) input. Using DMX wall controls (optionally supplied by Lumenwerx) or an existing DMX control system, either two channels of LEDs (warm-white & cool-white) for Duo or four channels of LEDs (Red/Green/Blue/White) for Quadro are independently adjustable. Each DMX driver has multiple output channels that can be independently addressed at the factory or on-site using built-in RDM (Remote Device Management) functionality. Dimming range from 100%-0%. At maximum driver load, efficiency<89%, PF>0.9, THD<20%.

FINISH

Interior - 95% reflective, matte white powder coating

Exterior - Side trim is offered in a range of vibrant color powder coatings.

CONSTRUCTION

Housing - Rolled and seamlessly welded aluminum extrusion 0.125 in thick, wide variety of colored powder coating

Diffuser - Uniform Lambertian Optic, thermoformed impact modified acrylic, completely enclosed

WEIGHT

Togo 48 - 15lbs - 6.8kg

CERTIFICATIONS


ETL - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

TOGO 48 PENDANT


5000 LUMEN AT 90CRI - LOW OUTPUT

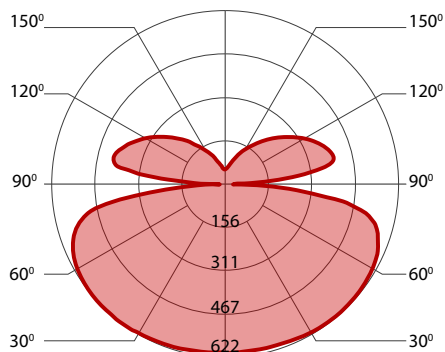

PERFORMANCE

| LED output | Color Temp | Watts | Nominal Delivered Lumens | Efficacy LPW |
|------------|------------|-------|--------------------------|--------------|
| low output | 2700K | 57 | 5000 | 88 |
| low output | 3000K | 54.5 | 5000 | 92 |
| low output | 3500K | 52.5 | 5000 | 95 |
| low output | 4000K | 51.5 | 5000 | 97 |
| low output | 5000K | 48.5 | 5000 | 103 |
| low output | 6500K | 49 | 5000 | 102 |


7000 LUMEN AT 90CRI - MEDIUM OUTPUT

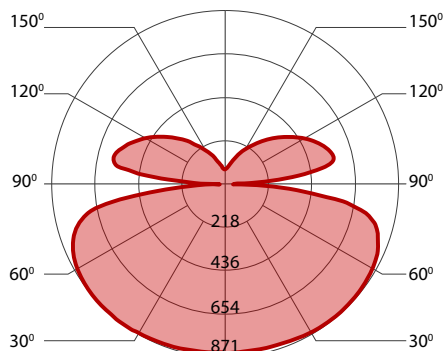

PERFORMANCE

| LED output | Color Temp | Watts | Nominal Delivered Lumens | Efficacy LPW |
|---------------|------------|-------|--------------------------|--------------|
| medium output | 2700K | 81.5 | 7000 | 86 |
| medium output | 3000K | 78.5 | 7000 | 89 |
| medium output | 3500K | 76 | 7000 | 92 |
| medium output | 4000K | 74.5 | 7000 | 94 |
| medium output | 5000K | 70 | 7000 | 100 |
| medium output | 6500K | 70.5 | 7000 | 99 |

9000 LUMEN AT 90CRI - HIGH OUTPUT

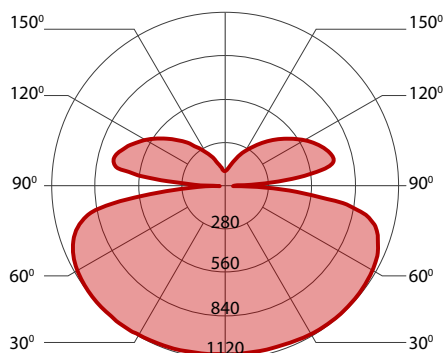

PERFORMANCE

| LED output | Color Temp | Watts | Nominal Delivered Lumens | Efficacy LPW |
|-------------|------------|-------|--------------------------|--------------|
| high output | 2700K | 108.5 | 9000 | 83 |
| high output | 3000K | 103.5 | 9000 | 87 |
| high output | 3500K | 101 | 9000 | 89 |
| high output | 4000K | 99 | 9000 | 91 |
| high output | 5000K | 93 | 9000 | 97 |
| high output | 6500K | 93.5 | 9000 | 96 |

TOGO 48 PENDANT

CHROMAWERX TUNABLE WHITE AND DIM TO WARM

DUO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES

Do you require a wall controller provided by Lumenwerx?

NO

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓

DMX controller supplied by Lumenwerx

How many zones do you have?
A zone consists of one or more luminaires behaving identically.



1 Zone



2 Zones

How to calculate the required number of drivers:

Per fixture

1x Driver / 50W per side

To Calculate # of drivers

1 - 4 Zones

5 or more Zones

Do you have more than 32 drivers in total?

NO

YES

Order a standard Lumenwerx wall controller.

WALL CONTROLLER

WCW - wall controller white
WCB - wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.

Refer to your DMX integrator for the installation. ✓

Subject to factory evaluation. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

TOGO 48 PENDANT

CHROMAWERX QUADRO - RGBW

QUADRO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES

Do you require a wall controller provided by Lumenwerx?

NO

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓

DMX controller supplied by Lumenwerx

How many zones do you have?

A zone consists of one or more luminaires behaving identically.



1 Zone



2 Zones

How to calculate the required number of drivers:

Per fixture

1x

Driver

5000lm
per side

To Calculate
of drivers

1 Zone

2 to 3 Zones

4 or more Zones

Do you have more than
32 drivers in total?

NO

YES

Order a standard Lumenwerx wall controller type 1.

WALL CONTROLLER

WC1W - Single zone wall controller white
WC1B - Single zone wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.

Refer to your DMX integrator for the installation. ✓

Subject to factory evaluation. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

Order a standard Lumenwerx wall controller type 2.

WALL CONTROLLER

WC2W - 3 zone wall controller white
WC2B - 3 zone wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.

Refer to your DMX integrator for the installation. ✓


Subject to factory evaluation. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

TOGO 48 PENDANT

CHROMAWERX TUNABLE WHITE AND RGBW

GENERIC DMX NETWORK ARCHITECTURE

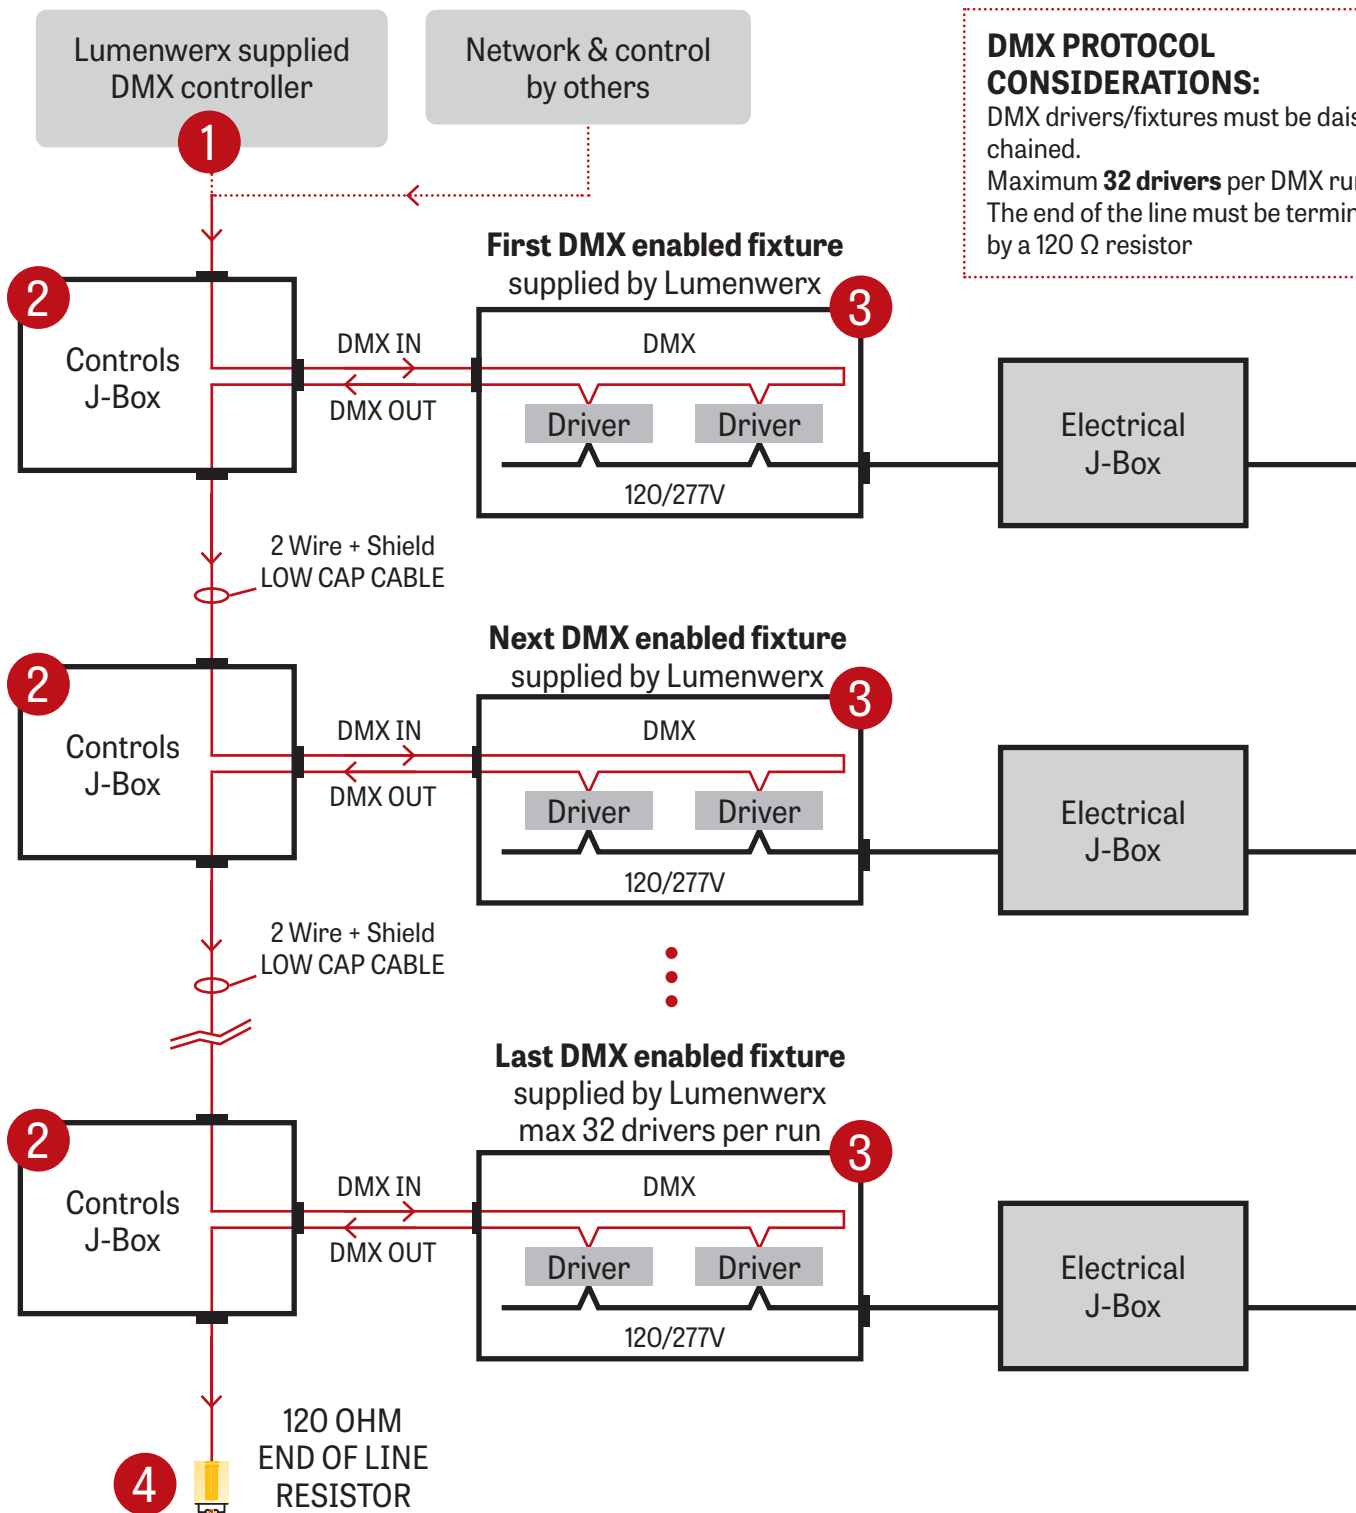

TOGO 48 PENDANT


CHROMAWERX TUNABLE WHITE AND RGBW

1 LUMENWERX SUPPLIED DMX CONTROLLER


To the first fixture

2 Wire +
Shield Low Cap Cable

Back Panel

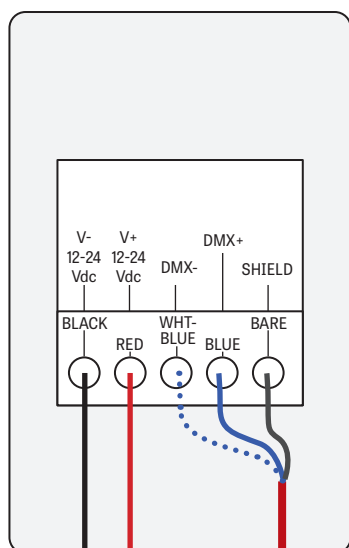


RGBW Front Panel

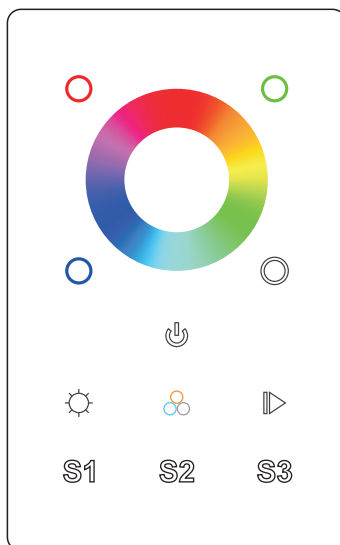

Controller image may differ

TW Front Panel

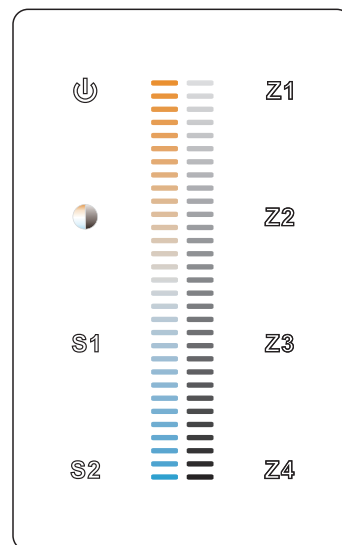

Controller image may differ

I.E.: Cerco Cable 7539-10
Belden 9841
Belden 8241

Power Supply
120-277VAC / 24VDC

DC out

N
L

Neutral

DC in
BROWN

Line


Ground

Electrical
J-Box


TOGO 48 PENDANT

CHROMAWERX TUNABLE WHITE AND RGBW

2 J-BOX DMX DAISY CHAIN DETAIL

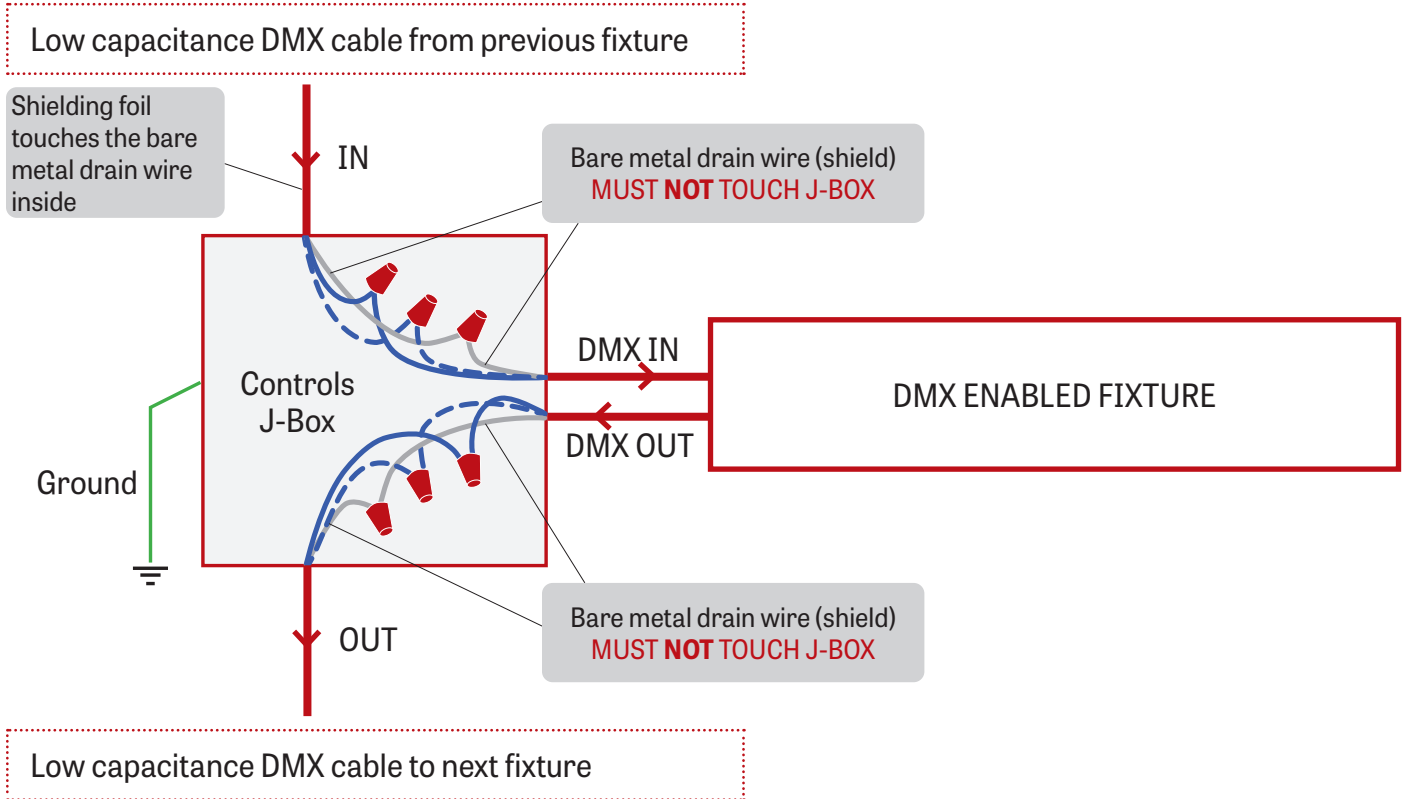


3 DMX CONNECTION PENDANT & WALL REMOTE DRIVER

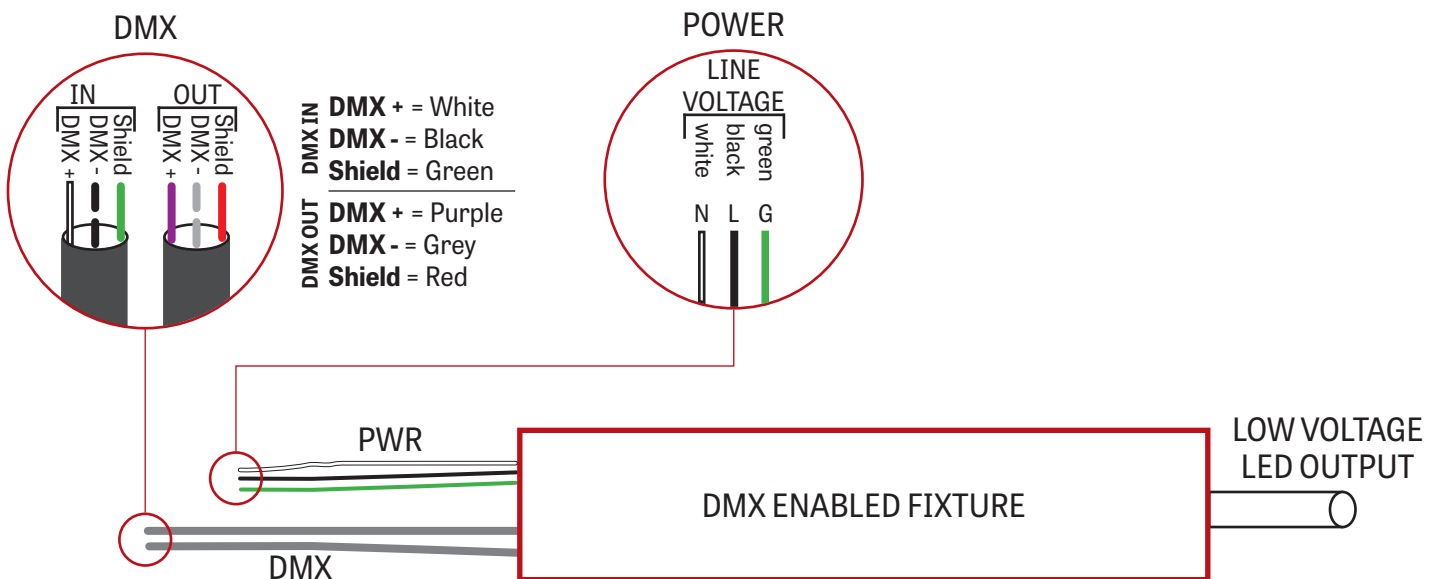

TOGO 48 PENDANT

CHROMAWERX TUNABLE WHITE AND RGBW

4 LAST DMX CONNECTION DETAIL

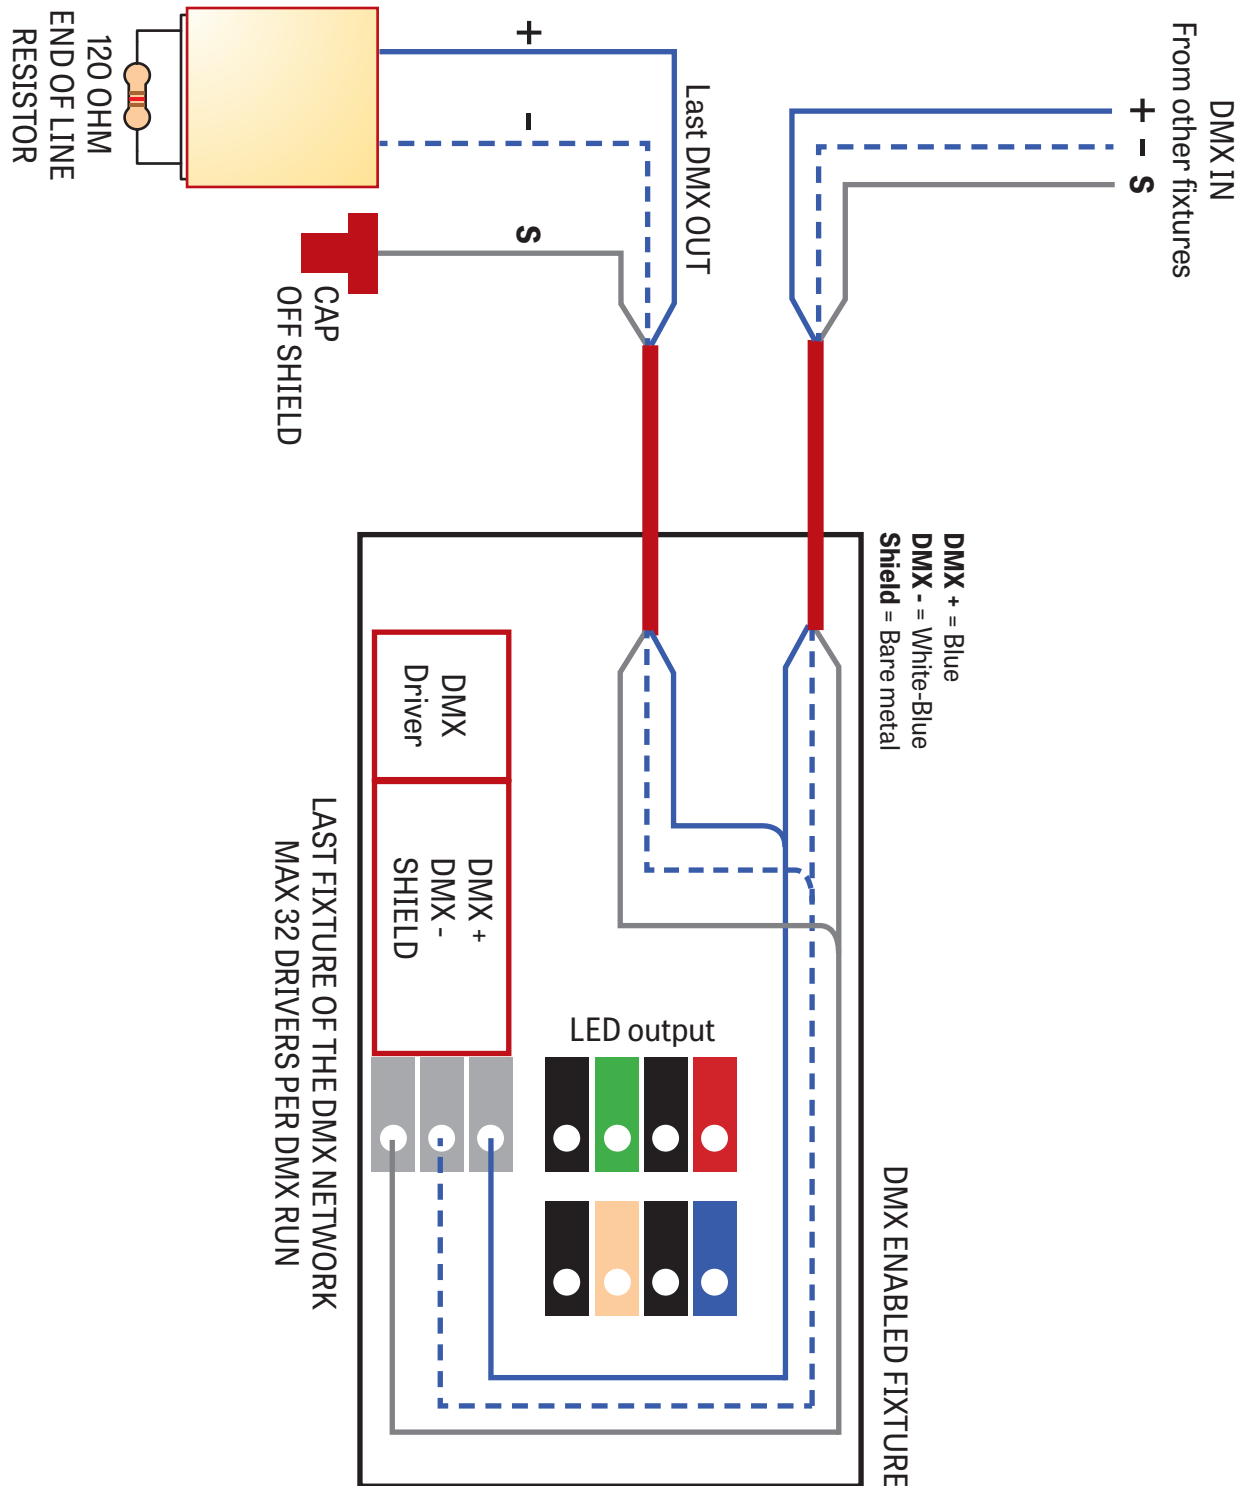

TOGO 48 PENDANT


CHROMAWERX TUNABLE WHITE AND RGBW

DMX WALL CONTROLLER - TUNABLE WHITE

Default DMX Addresses:

1. WARM | 2. COOL

WC

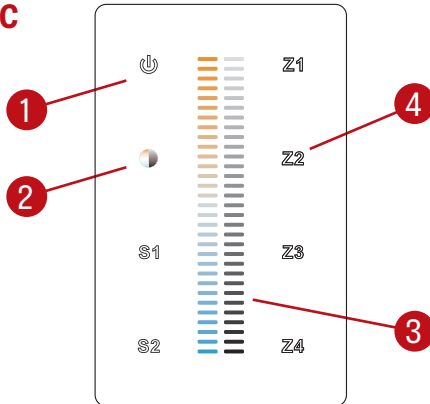


- (1) Power: Use this button to turn ON or OFF the fixture.
- (2) Brightness/CCT: Use the color/brightness toggle button to choose between color/brightness. When Blue: brightness is selected; when Yellow: color is selected.
- (3) Slider: Depending on the mode chosen in step 2, the slider will allow the user to set desired color or brightness.
- (4) Zone select: Up to 4 zones can be selected, either independently or together. Once selected, the commands will be sent to the zone identified by a Blue LED.

DMX WALL CONTROLLER - RGBW

Default DMX Addresses:


1. RED | 2. GREEN | 3. BLUE | 4. WHITE

WC1

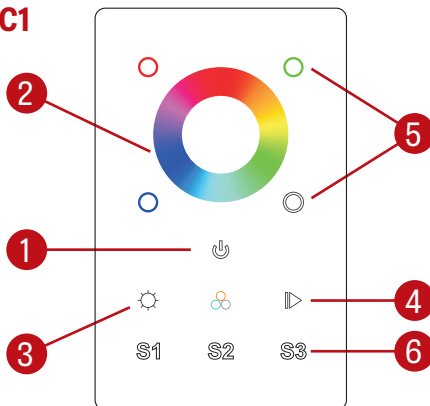

- (1) Power: Use this button to turn ON or OFF the RGBW fixture.
- (2) Color Wheel: The wheel is used to rapidly select a color (RGB colors only).
- (3) Brightness (RGB): Hold down this button to either increase or decrease the brightness of the current RGB selection. White will not be affected by the RGB brightness button.
- (4) Color Cycle: This button will start an animation, rotating between reds, greens, and blues, the arrows allow the user to speed up or slow down the animation.
- (5) Individual Colors: By pressing and holding a color, it will be possible to brighten or dim it. Quickly pressing a color will either turn it OFF or turn it ON to its previous dim level. White: In order to activate or deactivate and dim the White channel, the White button needs to be used.
- (6) Scenes: By holding down one of the scenes button, the current color selection is saved. It can be later accessed by quickly pressing on one of the Scene buttons.

WC2

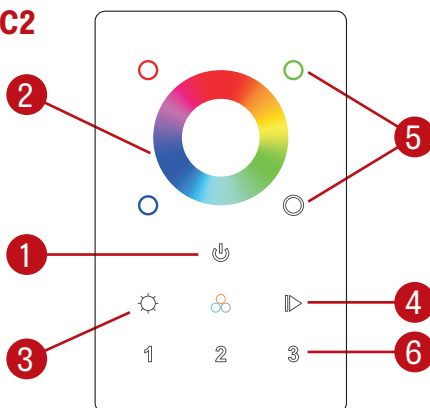

- (1) Power: Use this button to turn ON or OFF the RGBW fixture.
- (2) Color Wheel: The wheel is used to rapidly select a color (RGB colors only).
- (3) Brightness: Hold down this button to either increase or decrease the brightness of the current RGB selection. White will not be affected by the RGB brightness button.
- (4) Color Cycle: This button will start an animation, rotating between reds, greens, and blues, the arrows allow the user to speed up or slow down the animation.
- (5) Individual Colors: By pressing a color, it will be possible to brighten or dim that specific color. White: In order to activate or deactivate and dim the White channel, the White button needs to be used.
- (6) Zone: By holding down one of the zone buttons, a zone can be selected and controlled.