



**NOTE:** Wire dimming conductors as Class 1

1

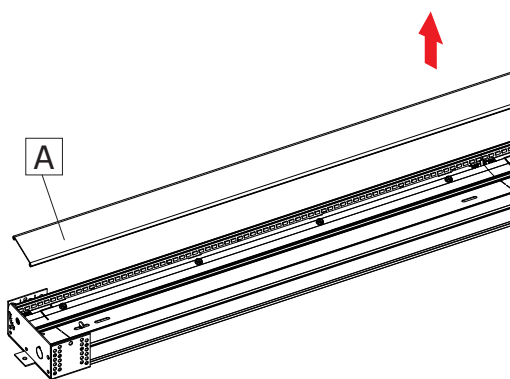


Remove the optics (A) on the fixture.

2

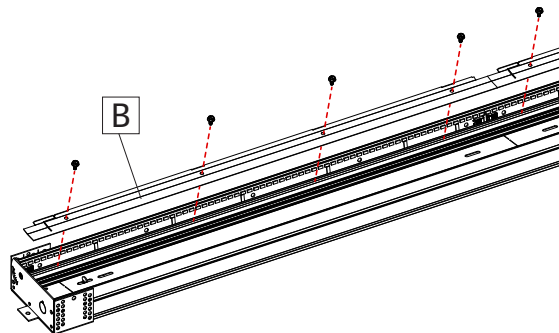


Unscrew and remove the specular reflectors (B).

3

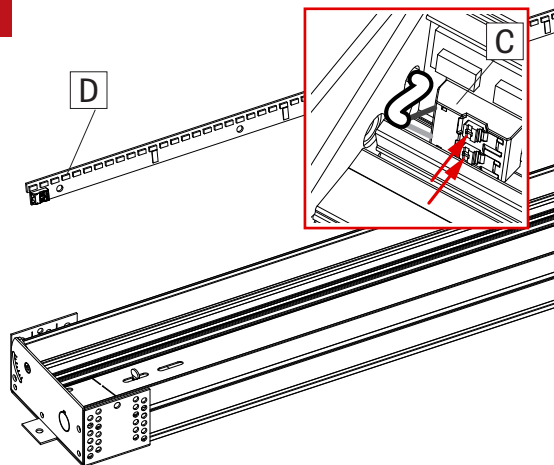


Disconnect molex connector (C) by taking a pointed object and pressing it on the two tabs on the top. Remove LED boards (D) from the fixture.

4

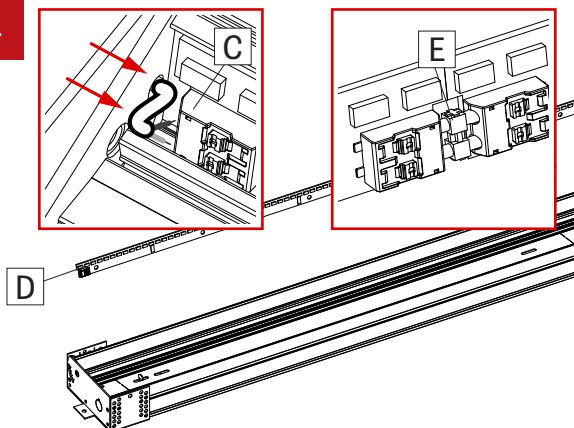


Replace LED boards (D) and reconnect LED molex connector (C). **NOTE: connect white wire into the negative (-) terminal and black wire into (+) positive terminal.** Place the LED boards (D) back in place and connect them with the board-to-board connector (E).

5

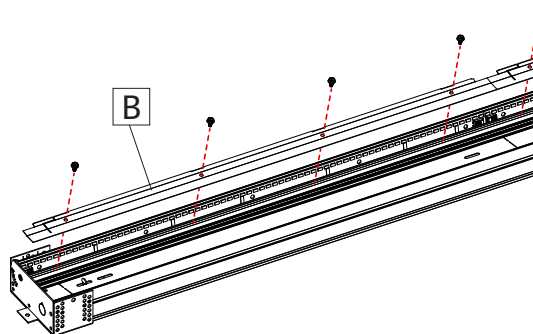

Screw back in place the specular reflectors (B).

6

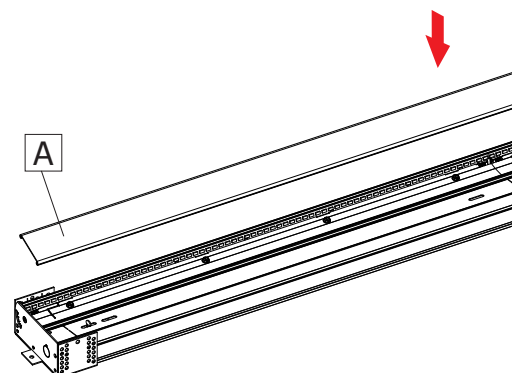

Put back in place the dust cover (A).