

VIA PERIMETER

MID SLEEVE FIXTURES CONNECTION - INSTRUCTIONS

LUMENWERX
WWW.LUMENWERX.COM

IMPORTANT: Installation instructions are shown with Via Perimeter 3 and applies to all Via Perimeter sizes

NOTE: Wire dimming conductors as Class 1




Before you start, measure your opening to determine the exact dimension.

DO NOT cut LED board, LED board in sleeve will easily slide over LED board in extrusion.




A miter saw is **REQUIRED** for **ON SITE** sleeve adjustment.

1

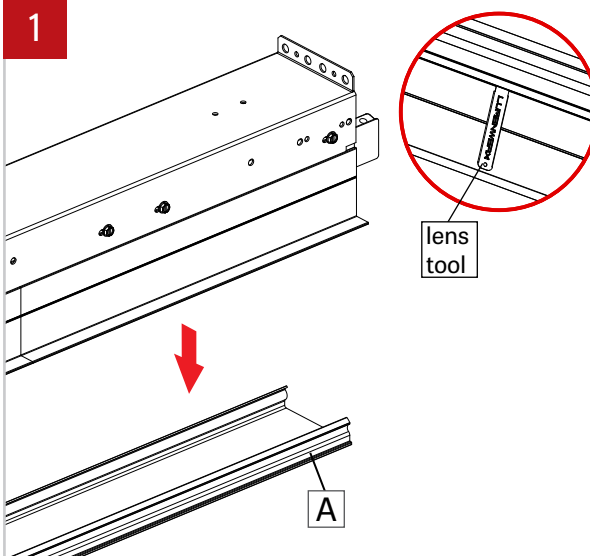


Remove the lens (A).

2

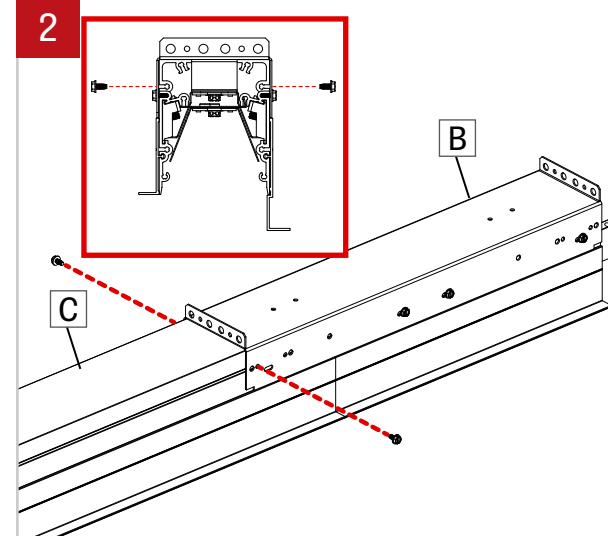


Unfasten the screws retaining the sleeve (B) to the main body (C).

3

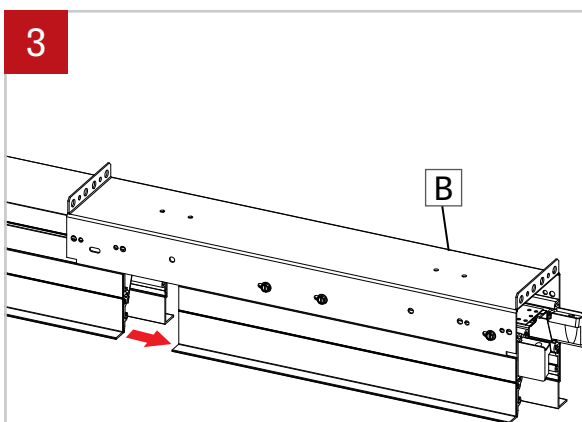


Slide the sleeve (B) slightly to access the quick connector feeding the sleeve.

4

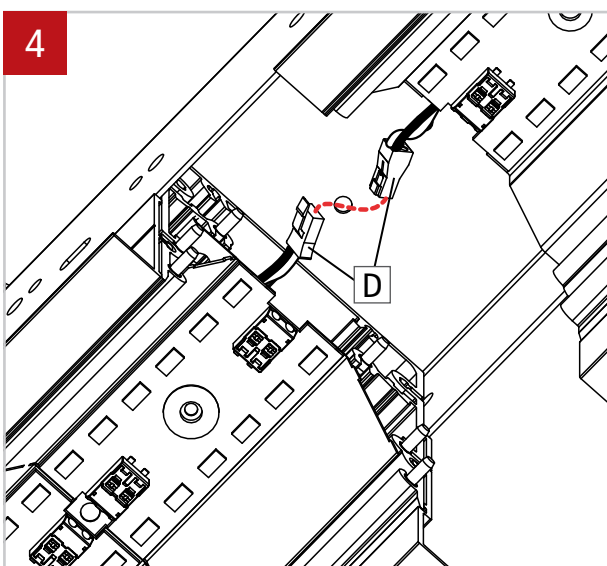

Disconnect quick connectors (D) feeding the sleeve.

5

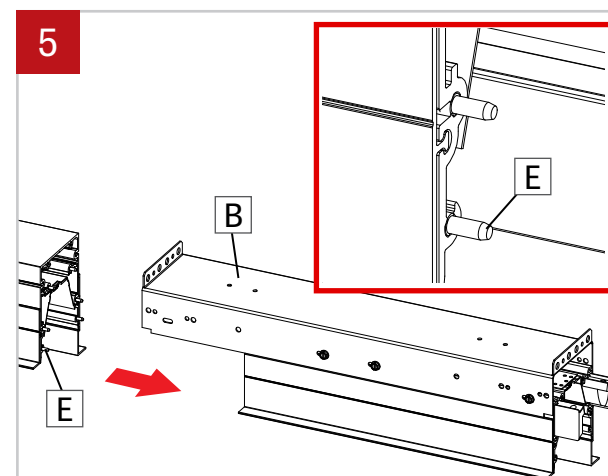


Remove the sleeve (B) from the main body. Make sure to not lose any of the 6 push pins (E).

VIA PERIMETER

MID SLEEVE FIXTURES CONNECTION - INSTRUCTIONS


LUMENWERX
WWW.LUMENWERX.COM

6

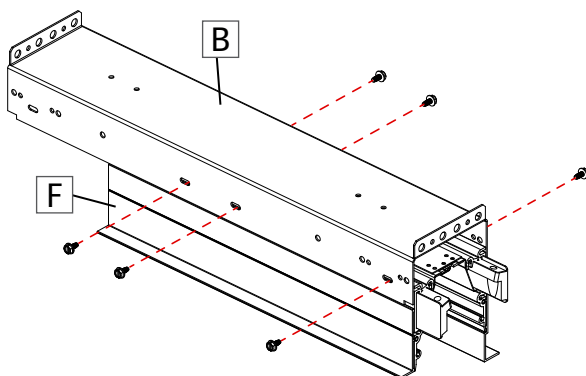


Remove the screws retaining the extrusions (F) on the sleeve base (B).

7

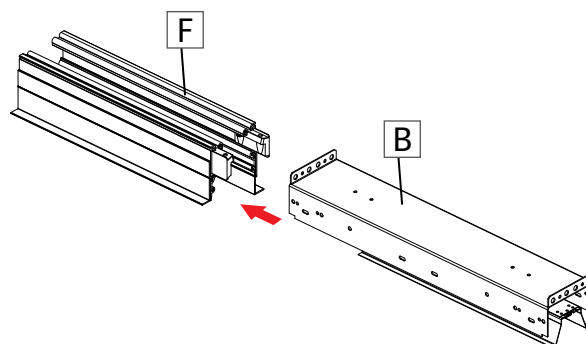


Remove the extrusions (F) from the sleeve base (B).

8

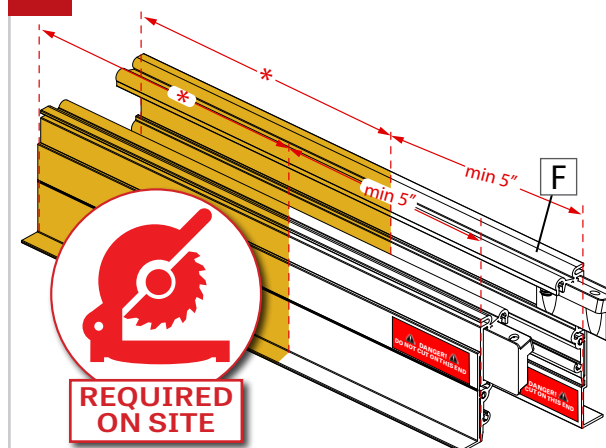


Using a Miter Saw, cut the four extrusions (F) to the required length **on the opposite side of the labels.** **They can't be cut shorter than 5\".**

9

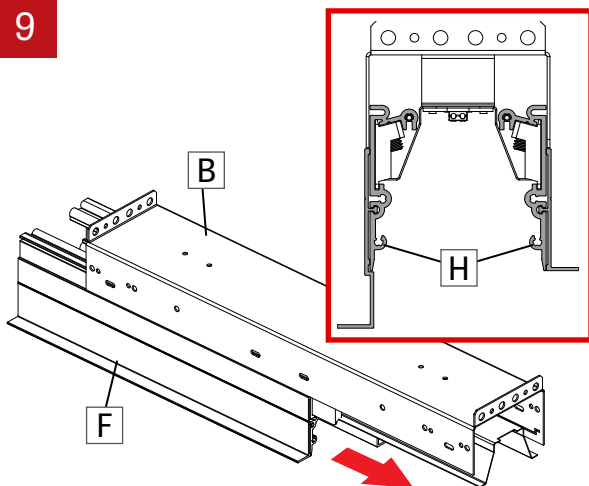


Slide the cut extrusions (F) all the way to the end of the sleeve base (B). Make sure that the extrusion (on the joiner side) is flush to the sleeve base (B).

10



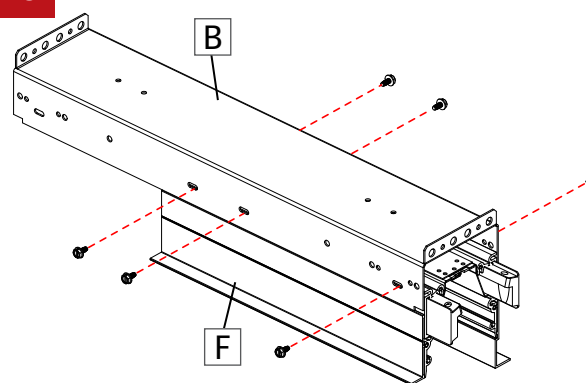


Secure the cut extrusions (F) to the sleeve base (B) by putting back the screws.

11

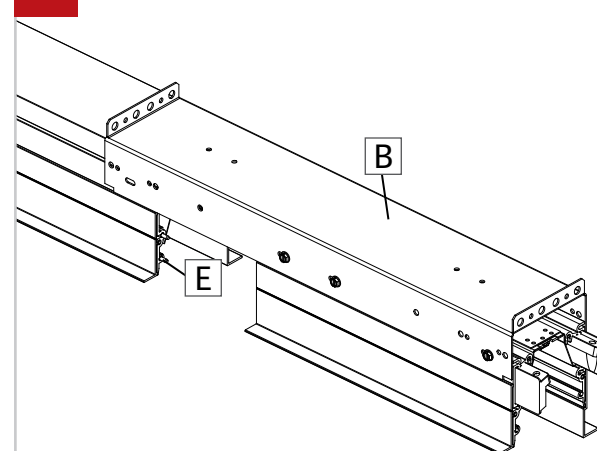

Make sure that all the push pins (E) are still on the main extrusion. Slide the sleeve (B) back in the main body. Do not slide all the way to the end.

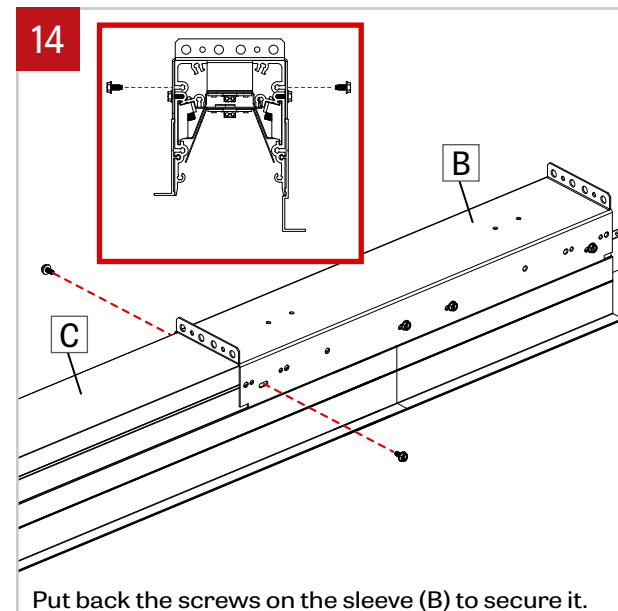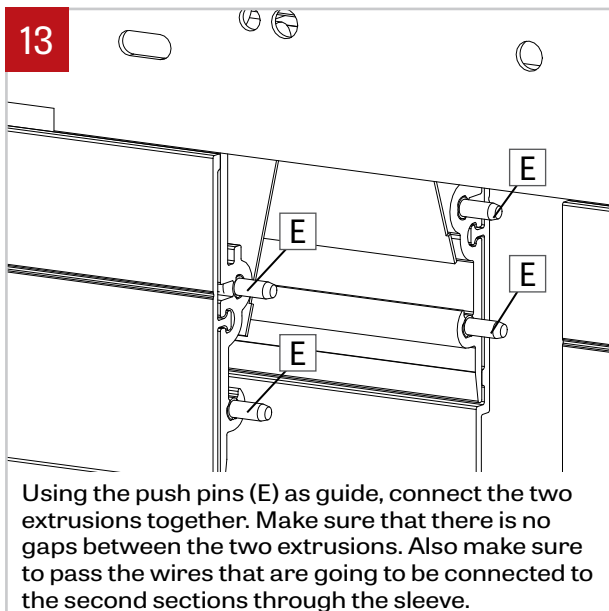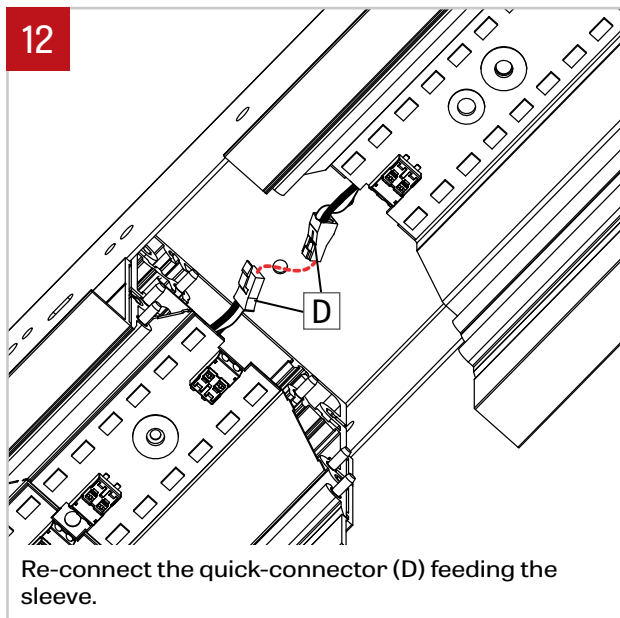

You are ready to proceed to your installation. Please refer to the proper installation instructions according to your fixture's mounting.