



NOTE: Wire dimming conductors as Class 1

1

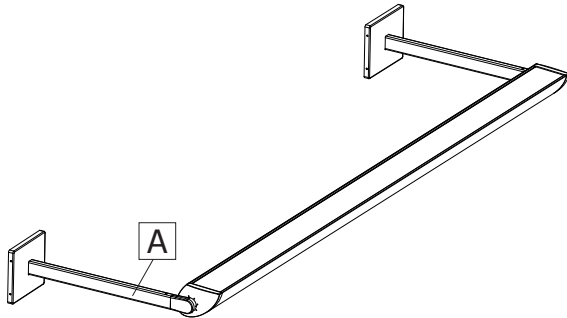


Make sure the power to the fixture (A) is turned off.

2

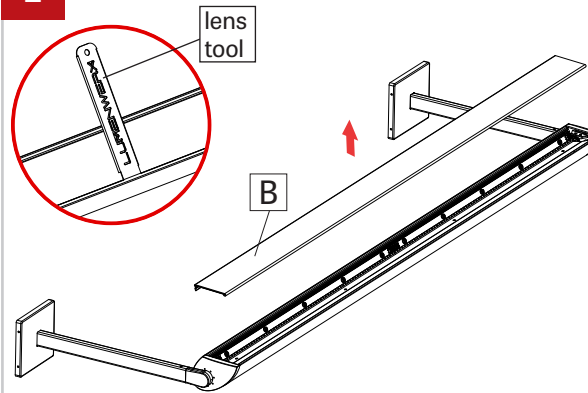


Remove the lens (B) from the fixture with the included lens tool.

3

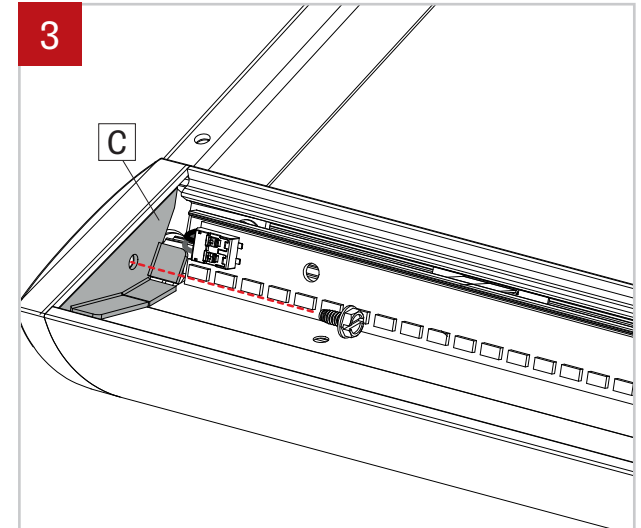


Unscrew and remove the end cap covers (C) on both sides of the fixture. Place them in a safe place.

4

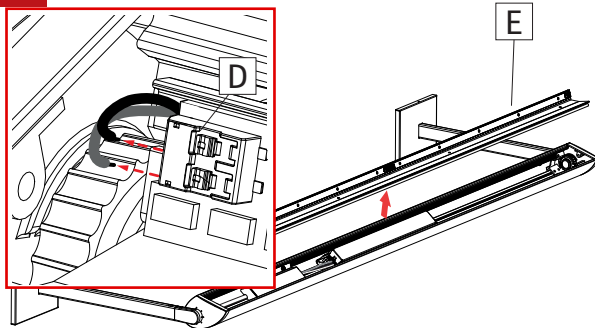


Disconnect LED mox connectors (D) by taking a pointed object and pressing on the two tabs on the top. Then remove the reflector (E) from the fixture and place it in a safe place.

5

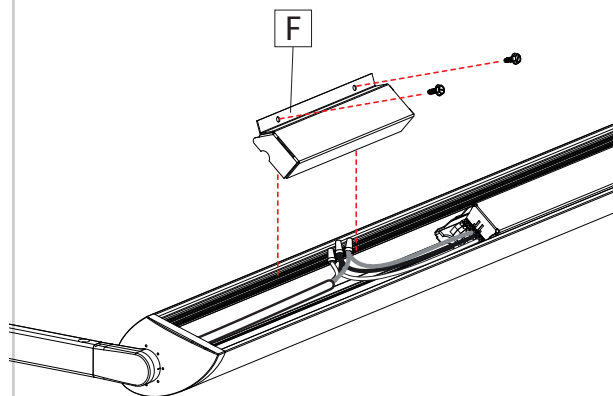


Unscrew and move the wires cover (F) from the fixture.


6

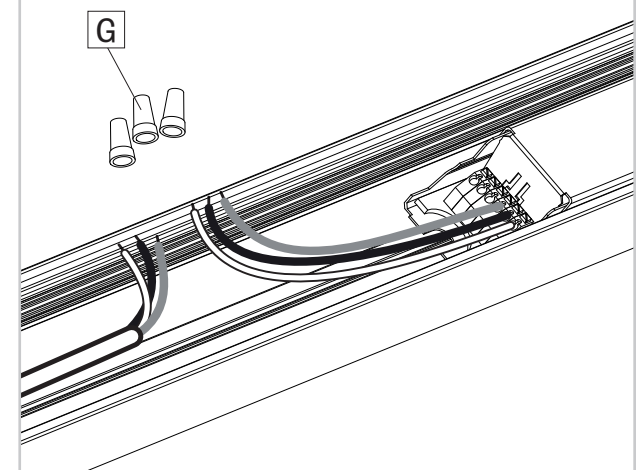


Disconnect wires from the driver (G).

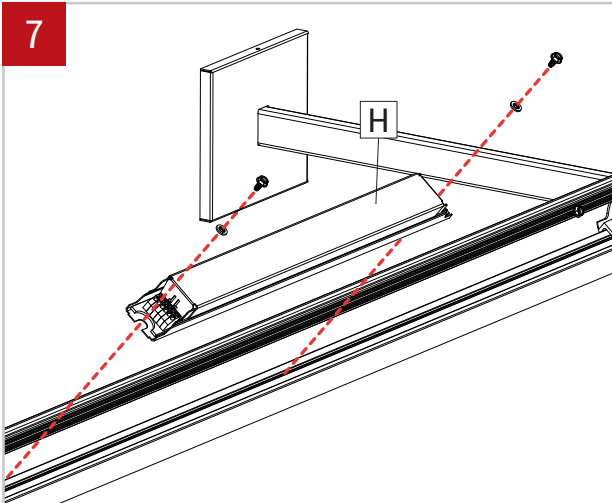


Unscrew the driver (H) from the fixture. Replace the driver and make electrical connection.

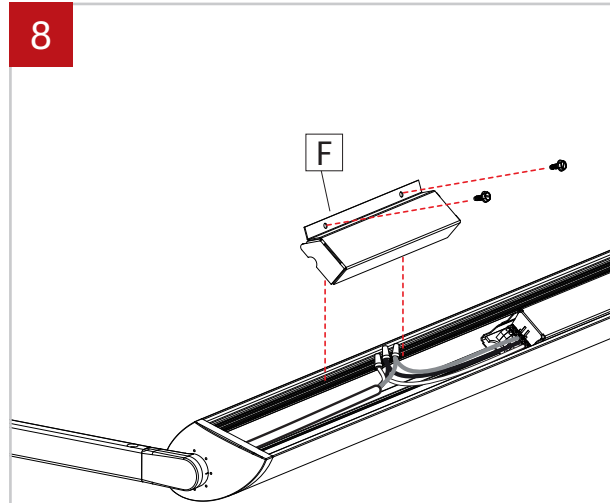


Put back in place the wires cover (F).

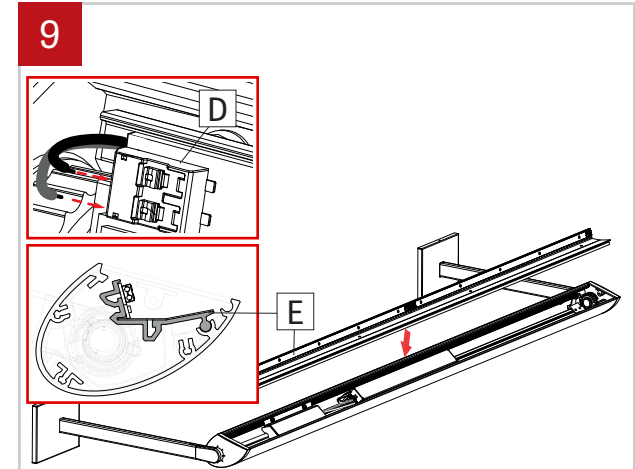

Reconnect LED molex connectors (D) to the reflector (E). Reinstall the reflector (E).

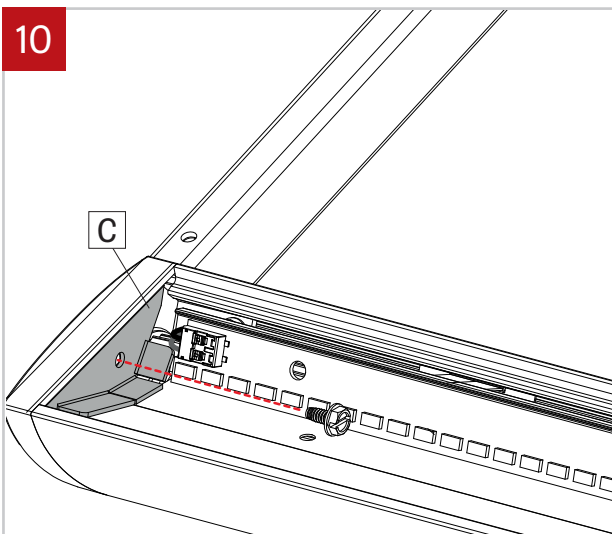

Screw back in place the end cap cover (C) to keep the reflector in place.

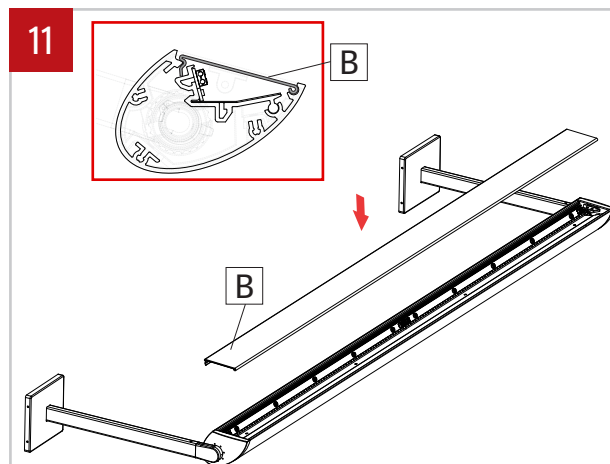

Put back in place the lens (B).