


# CANYON FLUORESCENT

## PENDANT CABLE- INSTALLATION INSTRUCTIONS


**NOTE:** Wire dimming conductors as Class 1

### 1 SINGLE FIXTURE

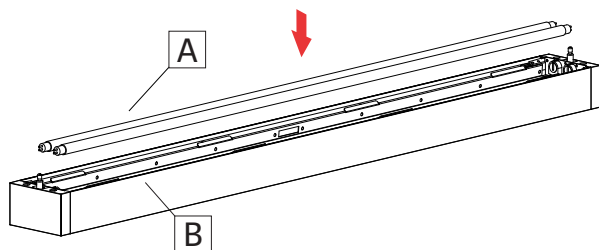


Install lamps (A) in the fixture (B). For a continuous system do not install lamps (A).

### 2 SINGLE FIXTURE

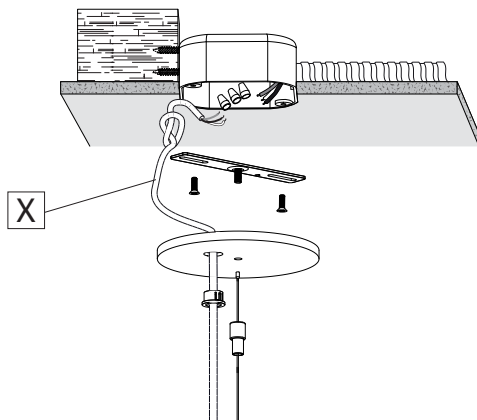


Locate ceiling mounting points according to supplied client drawing. Make a knot in the power cord (X) and then connect it to the ceiling power feed.

### 3 POWER SIDE

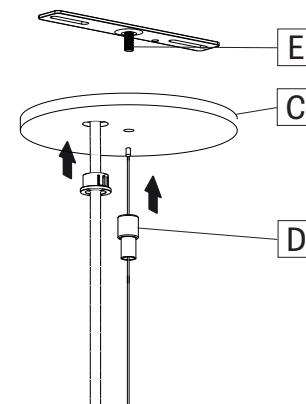


Secure canopy (C) with slip ring (D) on threaded rod (E).

### 4 NON-POWER SIDE

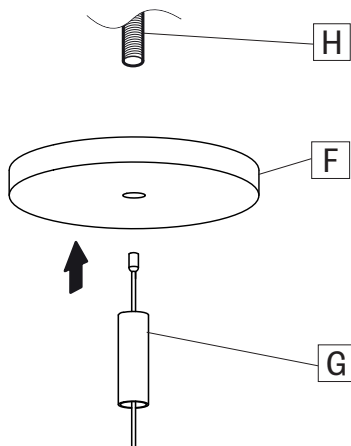


Secure canopy (F) with cable coupler (G) on crimp strut (1/4"-20) (H) (by other). For a continuous system, please proceed to step 7.

### 5

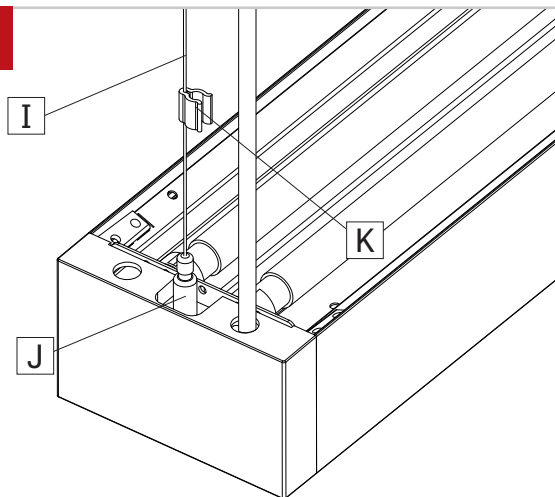

Insert the aircraft cable (I) into the cable gripper (J) and repeat on both sides of the fixture. Secure power cord to aircraft cable with plastic clip (K).

### 6

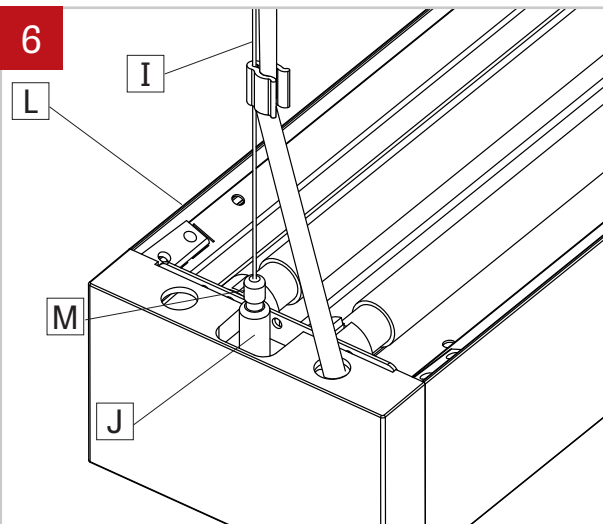


Level fixture (L) using the cable grippers (J). To adjust the cable (I) height, push the feeder tube (M) downward.


# CANYON FLUORESCENT

## PENDANT CABLE- INSTALLATION INSTRUCTIONS


### 7 CONTINUOUS SYSTEM

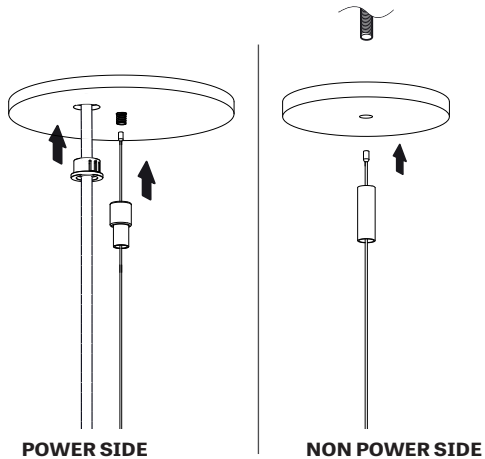


For a continuous system, repeat steps 2 to 4 for all mounting.

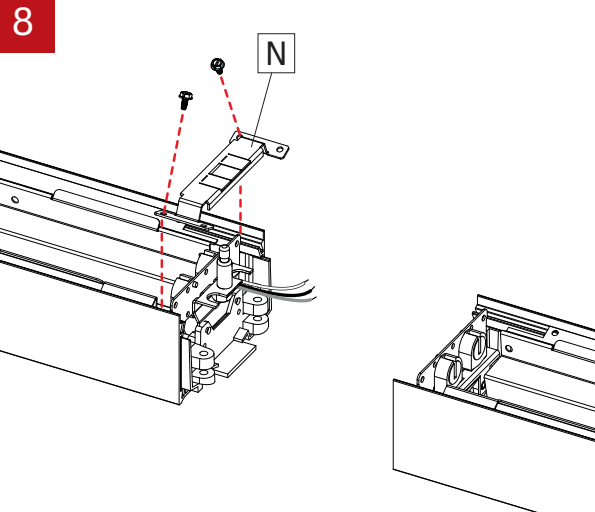


Unscrew and remove the top cap (N) from the fixture. Place it in a safe place.

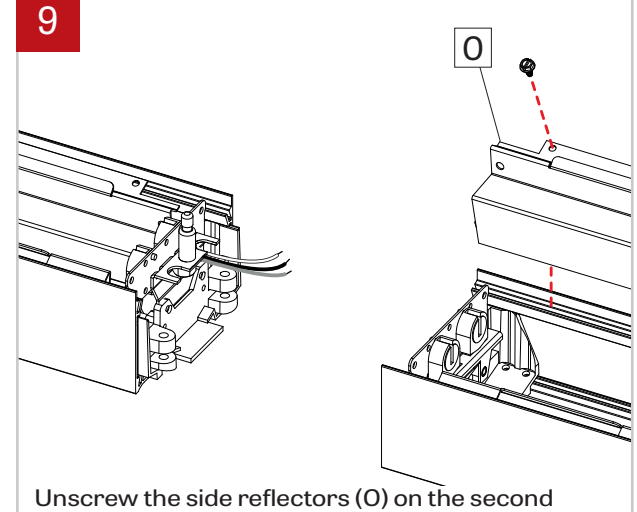


Unscrew the side reflectors (O) on the second fixture on the power side and remove it. Place the side reflector (O) in a safe place. Repeat for all fixtures in the run.

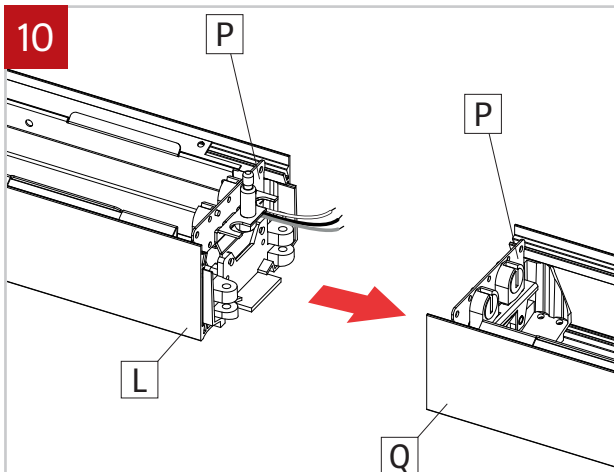

Pass the wires from the first fixture inside the second fixture. Align the joiners (P) at the end of the first two fixtures (L) and (Q) and push them together.

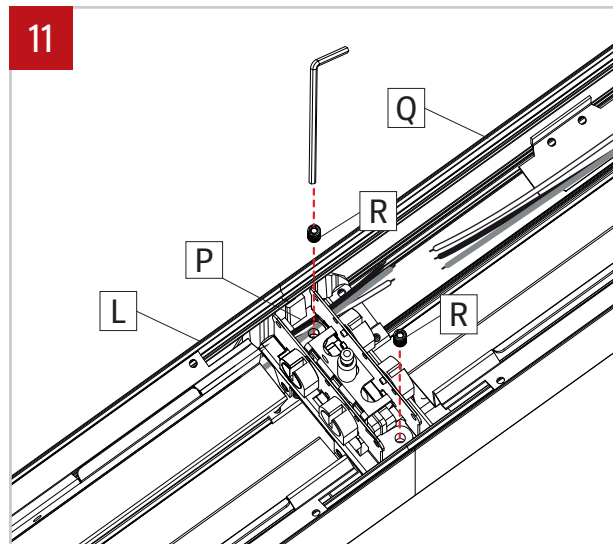

Secure the two fixtures (L) and (Q) by fastening set screws (R) on the joiners (P).

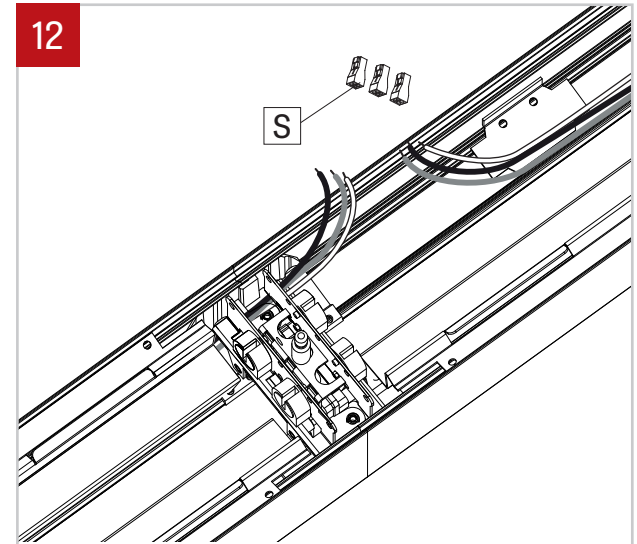


Connect wires between joining fixtures using quick connectors (S).

# CANYON FLUORESCENT


## PENDANT CABLE- INSTALLATION INSTRUCTIONS

13

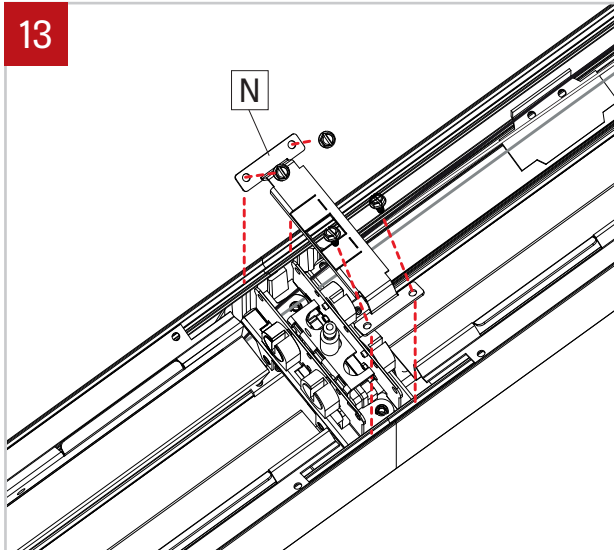


Install the top cap (N) on top of the joiners. Repeat steps 10 to 13 for all fixtures in the run.

14

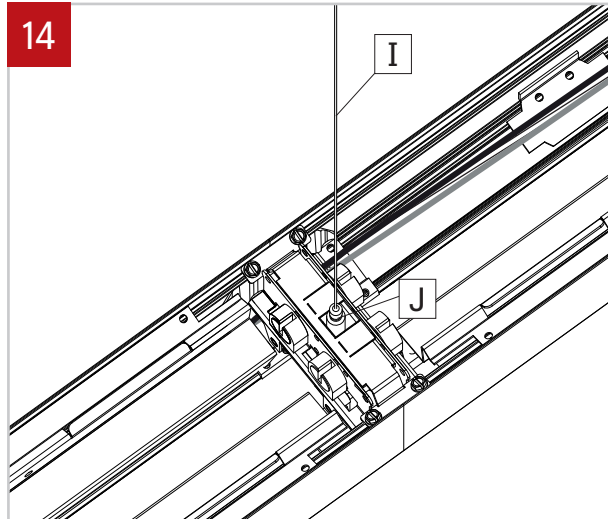


Insert the aircraft cable (I) into the cable gripper (J) and repeat on both sides of fixture. Secure power cord to aircraft cable with plastic clip.

15

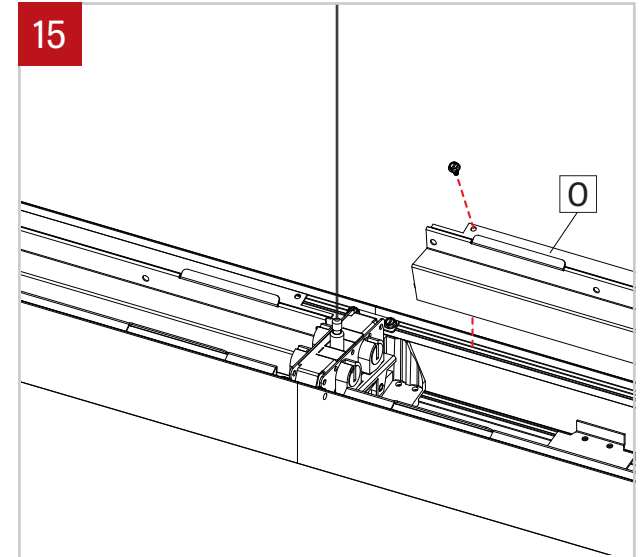

Reinstall the side reflector (O).

16

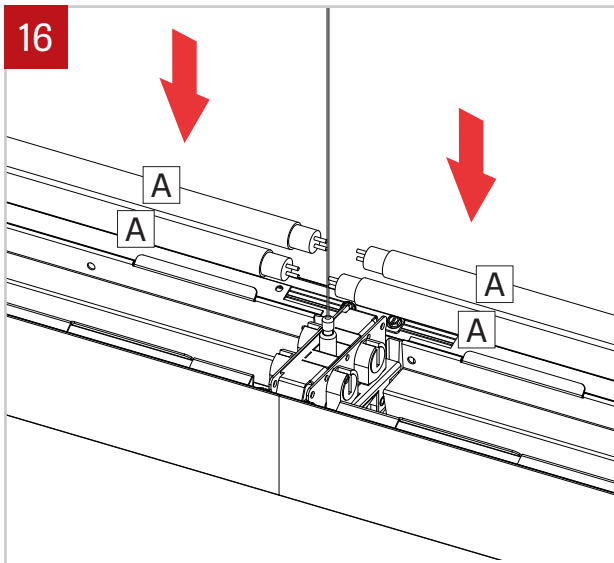

Install lamps (A).