



NOTE: Wire dimming conductors as Class 1

1

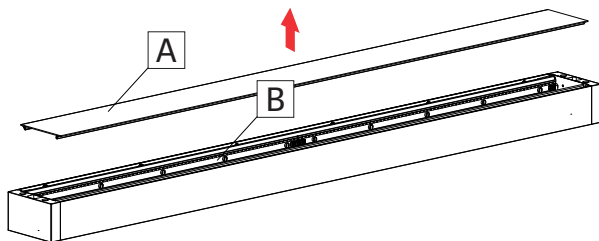


Remove dust cover (A) from the fixture (B).

2

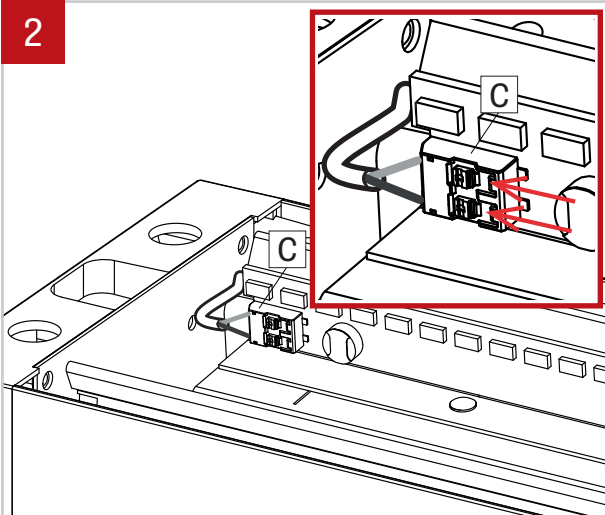


Disconnect LED molex connector (C) by taking a pointed object and pressing on the two tabs on the top.

3

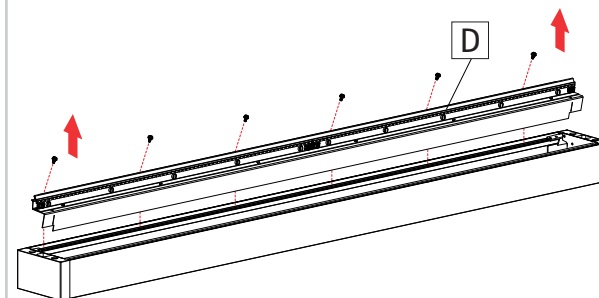


Unscrew and remove the side reflector (D).

4

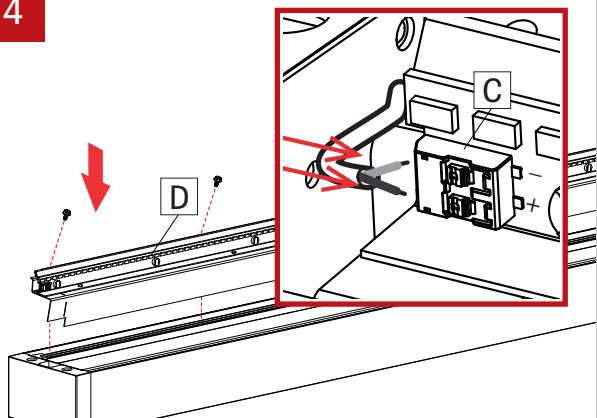Replace the side reflector (D) and reconnect the LED connector (C). **NOTE: connect white wire into the negative (-) terminal and the black wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the side reflector back in place.

5

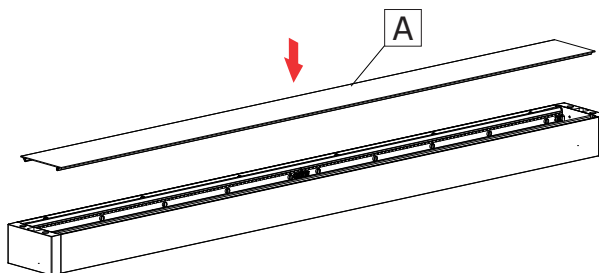

Reinstall the dust cover (A) back in place.