


**IMPORTANT:** Installation instructions are shown with Via 4 and applies to all Via sizes


**NOTE:** Wire dimming conductors as Class 1

### 1 SINGLE FIXTURE

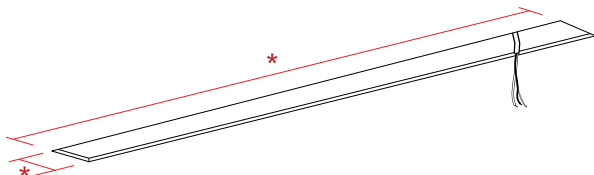


Prepare the area where the fixture is going to be installed. Cut hole in the drywall according to the dimensions [\*] given in the client drawings.

### 2

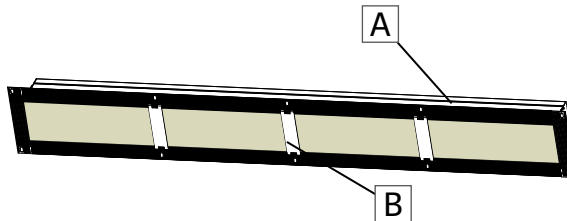


Make sure the power to the fixture (A) is turn off, the lens is installed on the fixture and protected by a cover. The spacer brackets (B) are in place, align with the obround holes of the flanges.

### 3

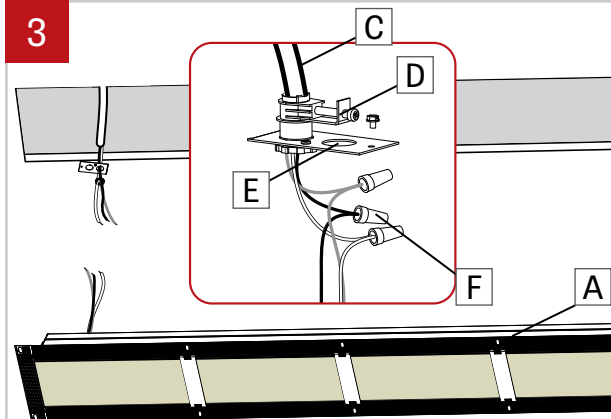


Install power cable (C) (by other) through the BX connector (D) (by other) and install onto the power plate (E) provided. Make electrical connections between power cable (C) and fixture cables using electrical marettes (F). Reinstall the power plate (E) to the fixture (A). **Number of wires may vary.**

### 4

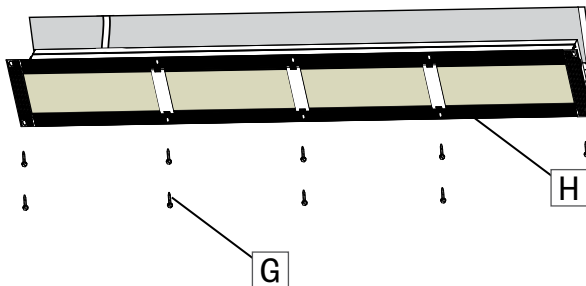


Fasten drywall screws (G) through the obround holes of the flanges (H).






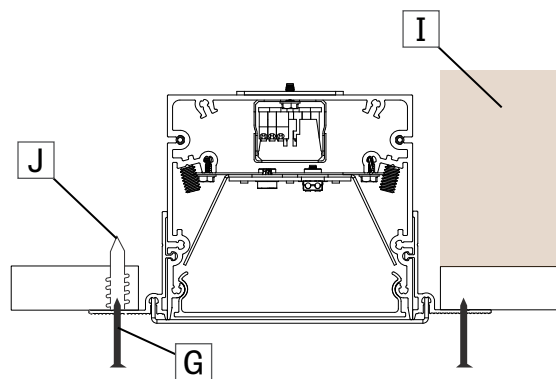


To reinforce the screws (G) that maintain the fixture in the drywall, wood blocking (I) or drywall anchors (J) must be used.


### 5

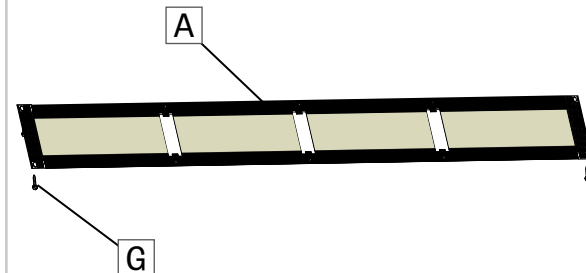

If the fixture position need adjustments, remove screws (G) on one side of the fixture (A) and adjust it. Reinstall the screws once the position is settled.

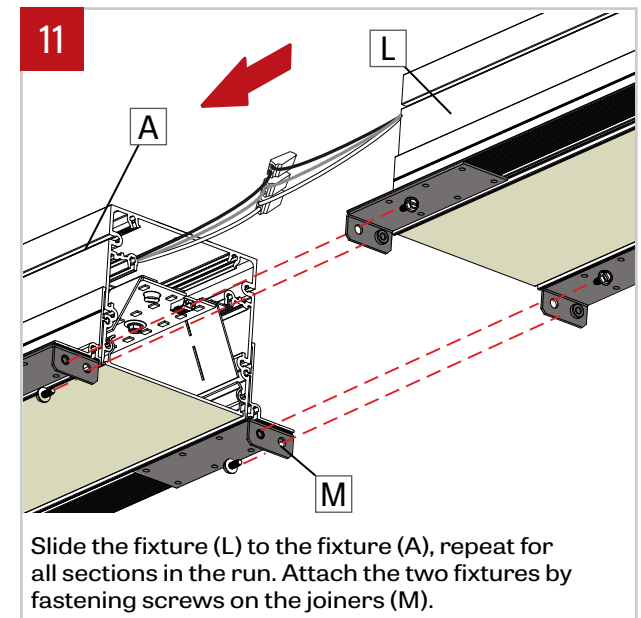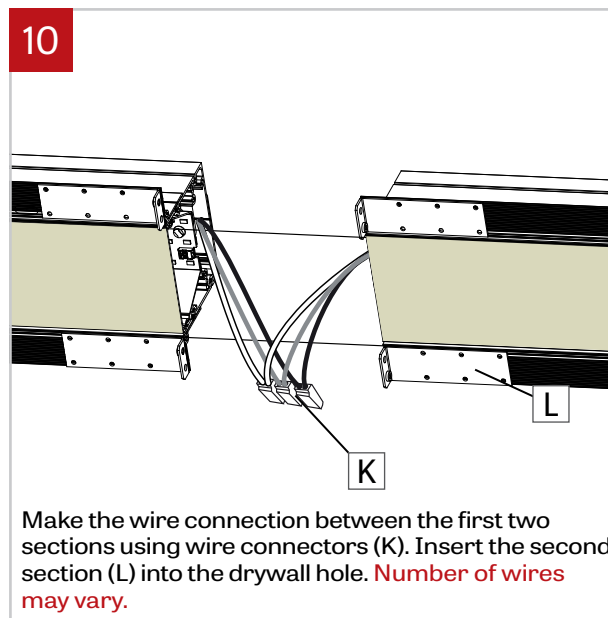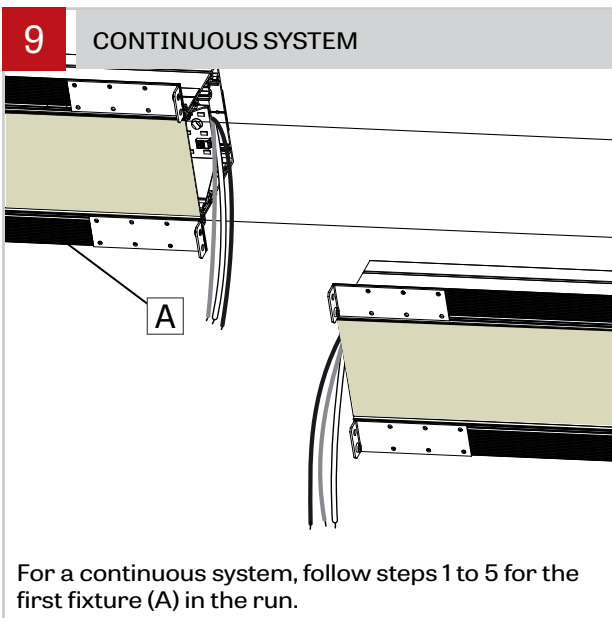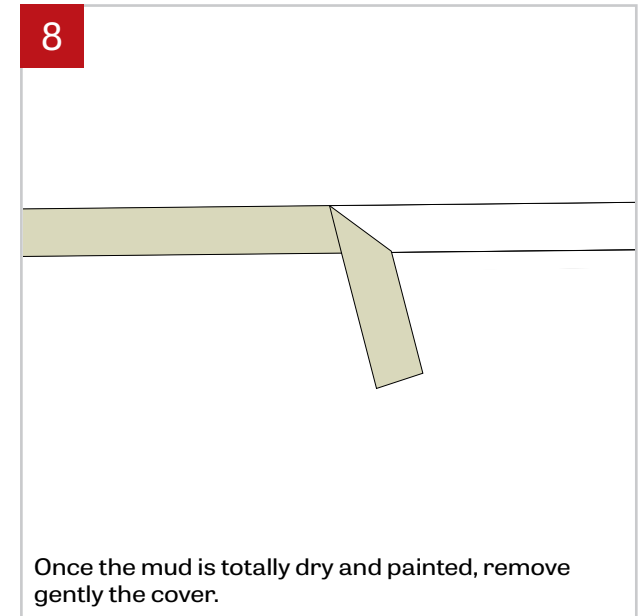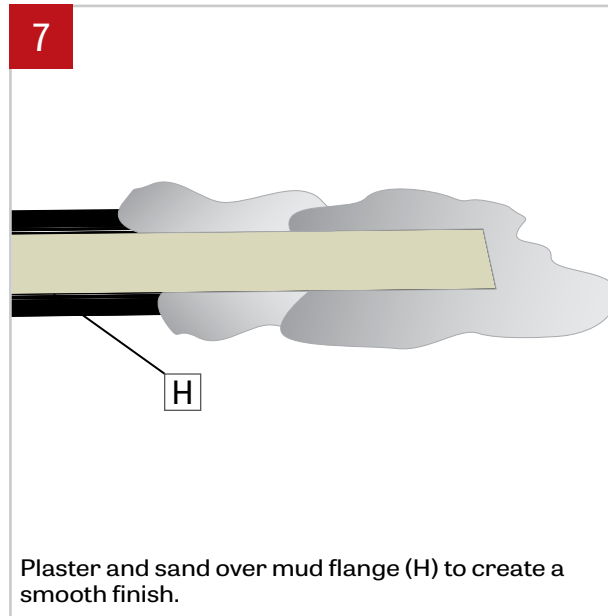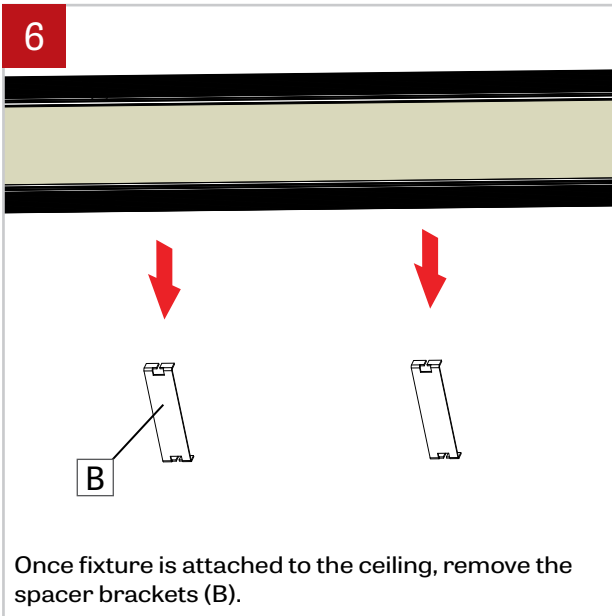


12

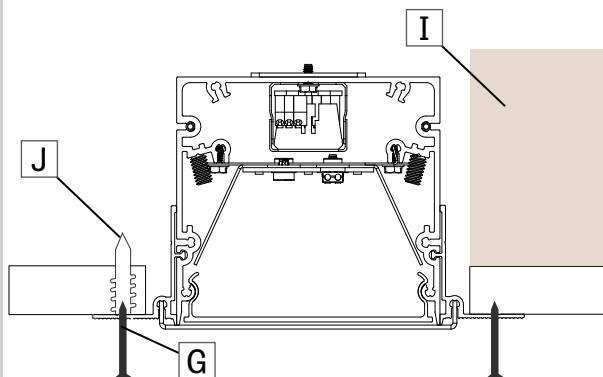


Fasten fixture to the ceiling by fastenning drywall screws (G) through flanges into anchors (J) of wood blocking (I) .

13

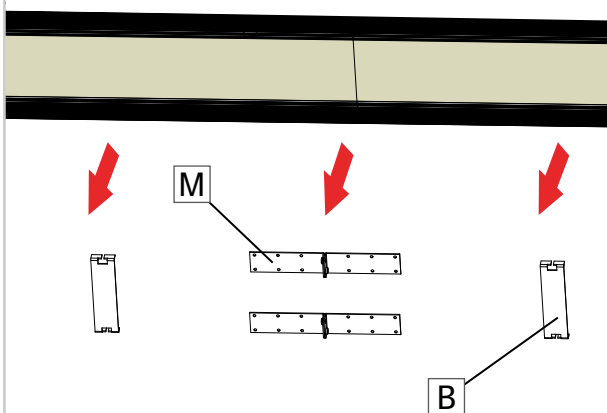


Once fixture is attached to the ceiling, remove the spacer brackets (B) and the joiners (M).

14

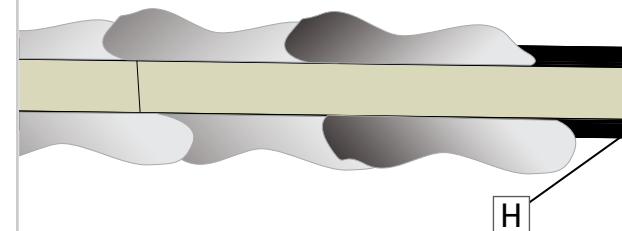

Plaster and sand over mud flange (H) to create a smooth finish.

15

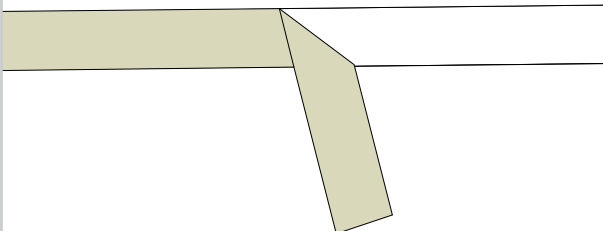

Once the mud is totally dry and painted, remove gently the cover.