



NOTE: Wire dimming conductors as Class 1

1

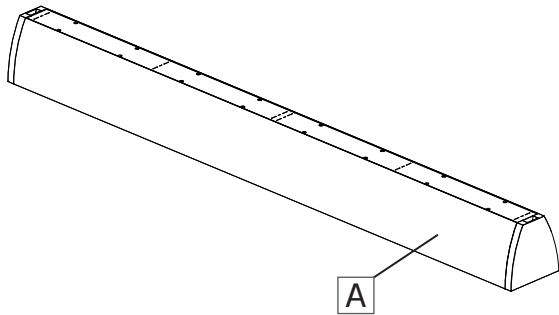


Make sure the power to the fixture (A) is turned off.

2

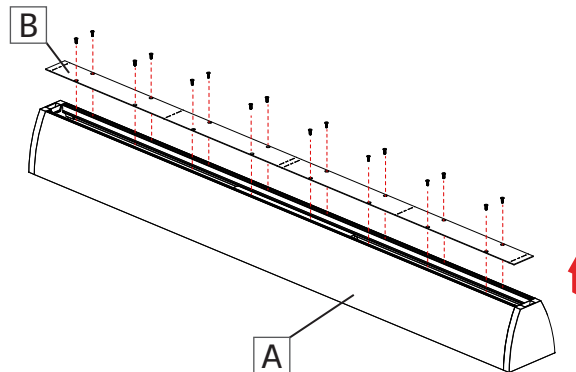


Unscrew then remove the top cover (B) of the fixture (A).

3

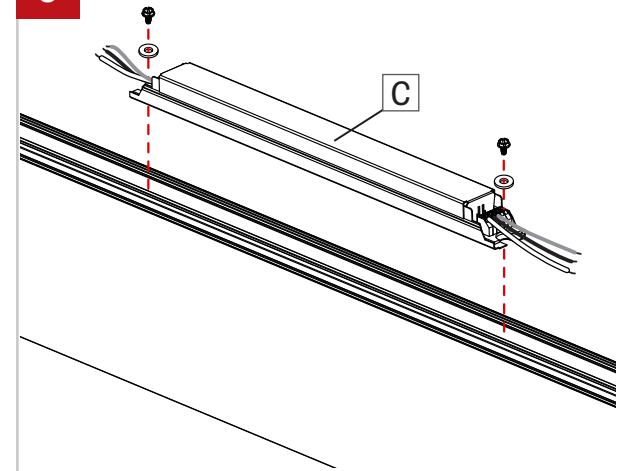

Disconnect wires from the driver (C). Unscrew the driver from the fixture. Replace the driver and connect the wires.

4

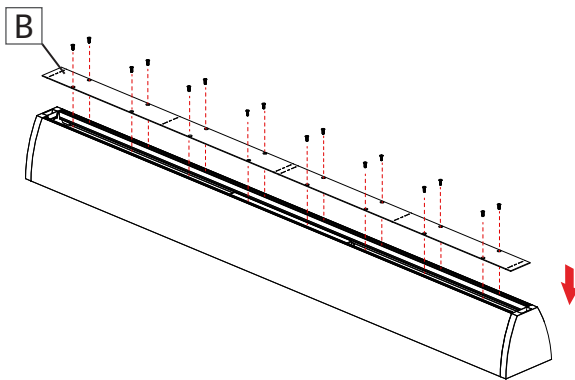

Screw the top cover (B) back in place. Power can be safely turned on.