


**NOTE:** Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

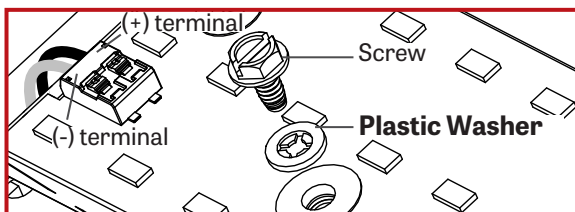


### 1 SINGLE FIXTURE

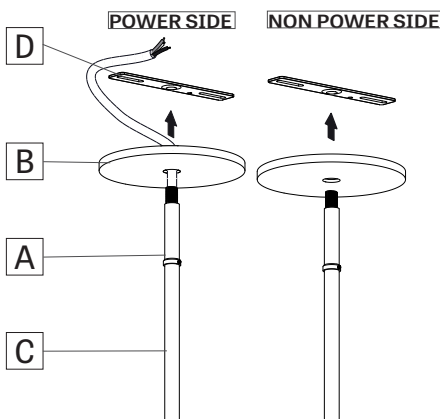


Make sure that the power to the fixture is turned off. Slide the slip ring (A) and the canopy (B) onto the stem (C) and leave some space. Screw the junction box crossbar (D) onto the stem (C).

### 2 FOR EMERGENCY CIRCUIT

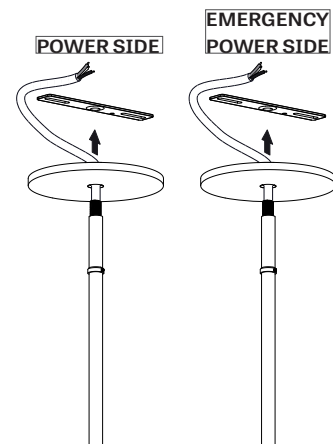


In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

### 3 FOR FIXTURE IN GRID CEILING

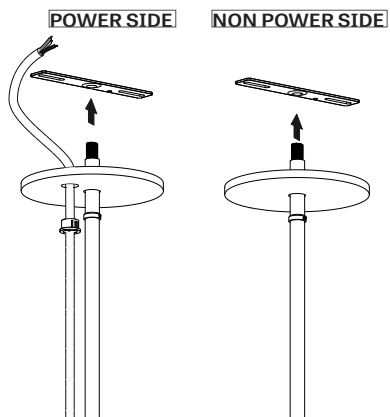


In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.

### 4

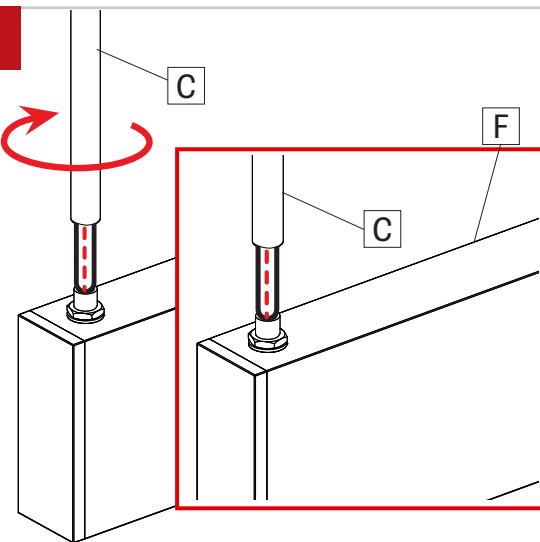


Screw the stems (C) onto the nipple at the ends of the fixture (F).

### 5 POWER SIDE

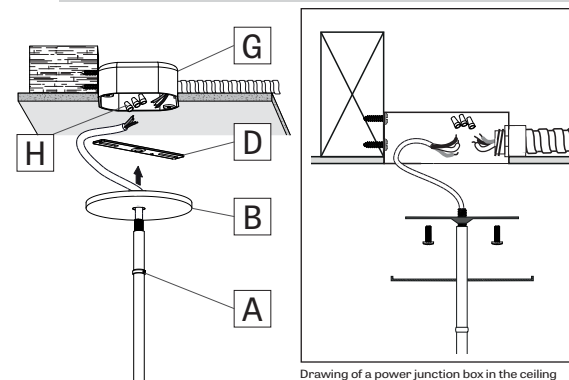


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Make wire connection with wire connectors (H). Then slide the canopy (B) and tighten the set up with the slip ring (A). **Number of wires may vary.**

### 6 NON-POWER SIDE

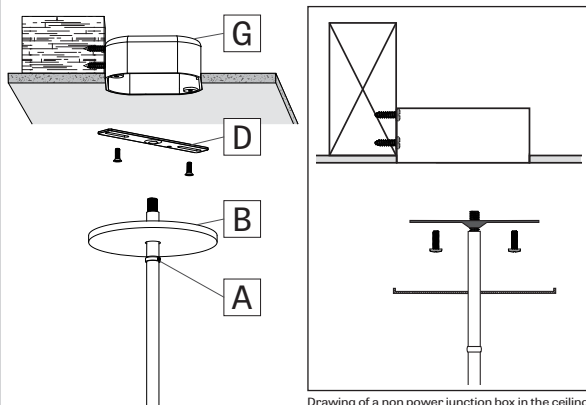


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Then slide the canopy (B) and tighten the set up with the slip ring (A).

### 7 CONTINUOUS SYSTEM

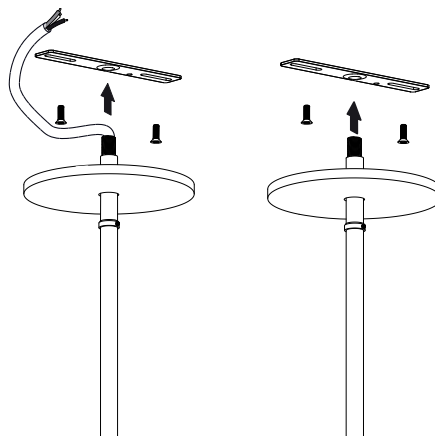


For a continuous system, repeat steps 1 to 3 for all mounting hardware.

### 8

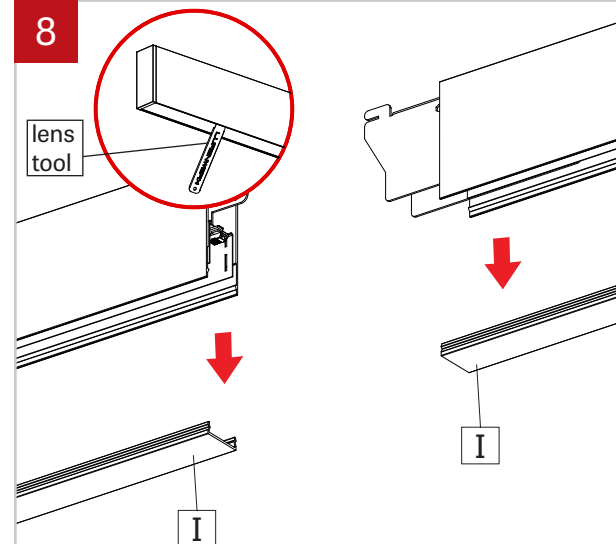


Remove the lenses (I) from all the fixtures in the run with the included tool.

### 9

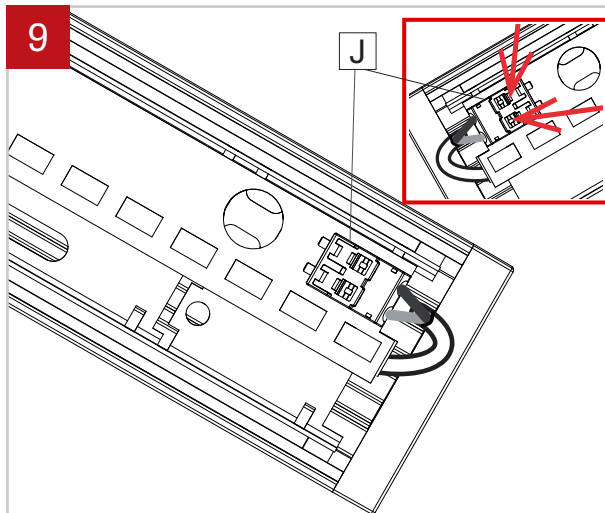


Disconnect LED molex connector (J) by taking a pointed object and pressing on the two tabs on the top.

### 10

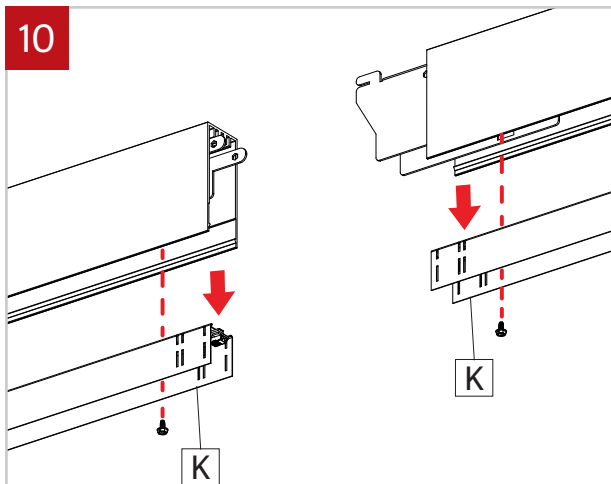

Remove all the end LED cartridges (K).

### 11

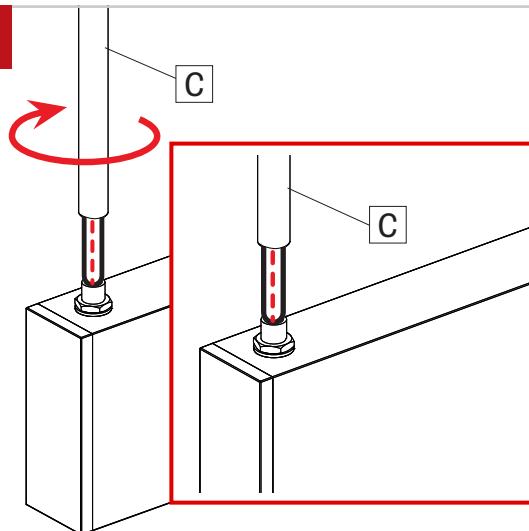

Screw the stems (C) on the first fixture. Then install it on the second fixture.

