

CAVA T 2x2 LED

RECESSED



LUMENWERX
WWW.LUMENWERX.COM



Grid ceiling



Drywall ceiling

DESCRIPTION

Cava T provides a pleasant canopy of gentle luminescence that brightens everyday work spaces as well as special areas. Cava T is available in 1x4 and 2x2 modules for a variety of ceiling conditions.

Cava T is an ideal vehicle for ChromaWerx color tuning in education, office, and healthcare applications where modular recessed luminaires are used.

Cava T is an ideal vehicle for ChromaWerx color tuning in education, office, and healthcare applications where modular recessed luminaires are used.

PROJECT: _____
TYPE: _____
NOTES: _____

up to 118 lm/w performance

ORDER GUIDE


IC RATED

CATR	22	RLO	LED				
LUMINAIRE ID	SIZE	OPTICS	LIGHT SOURCE	CRI	LUMEN PACKAGES	COLOR TEMP.	VOLTAGE
CATR - Cava T recessed	22 - 2'x2'	RLO - Reduced Luminance Optic	LED - high performance LED	80 - 80CRI 90 - 90CRI	2500 - min. low output 2500lm 3500 - medium output 3500lm 4500 - high output 4500lm 5000 - max. ultra high output 5000lm #### - other required lm/ft	27 - 2700k 30 - 3000k 35 - 3500k 40 - 4000k	120 - 120V 277 - 277V UNV - 120V-277V 347 - 347V (not available with Lutron)


DRIVER	ELECTRICAL	MOUNTING	FINISH	CONTROLS	OPTIONS
D1 - 1% dimming 0-10V DA - Dali LTEA2W - Lutron 1% - 2 wire FF 120V LDE1 - Lutron Hi-lume 1% Eco LDE5 - Lutron 5% EcoSystem	1 - 1 circuit +EB - emergency battery pack +GTD### - generator transfer device, 120V or 277V	TG9 - tegular 9/16" TG15 - tegular 15/16" TB9 - t-bar 9/16" TB15 - t-bar 15/16" ST - screw slot t-bar DF - drywall kit	W - matte white	STANDALONE CONTROLS OMS - Onboard Occupancy ODS - Onboard Daylight OCS - Onboard Occupancy & Daylight CONNECTED CONTROLS CCS() - LU-Lutron, EN-Enlighted, OS -Osram, CR -Crestron. To specify see information on page 4	FU - fuse FWC - flexible whip cable (6' std) CP - Chicago Plenum CU - custom

See page 3 for ordering code detailed information

CROSS SECTION

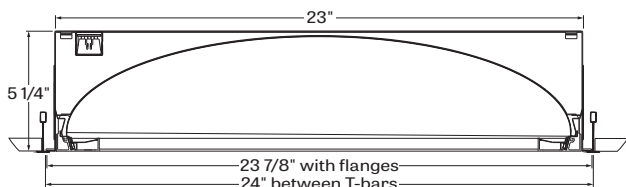

CATR - Cava T t-bar 9/16

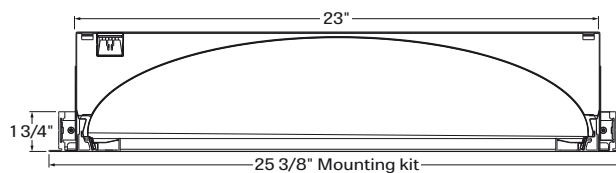



CATR - Cava T drywall

CAVA T 2x2 LED


RECESSED

LUMENWERX
WWW.LUMENWERX.COM


CAVA T

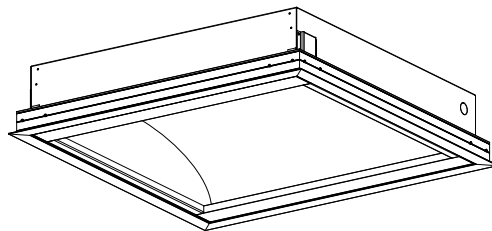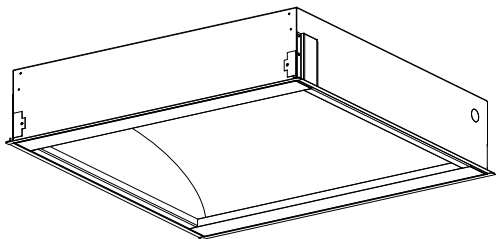


CAVA T- TG9 - tegular 9/16"

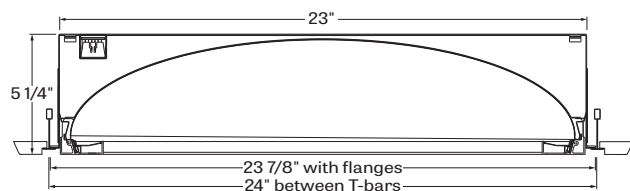


CAVA T- - TB15 - t-bar 15/16"

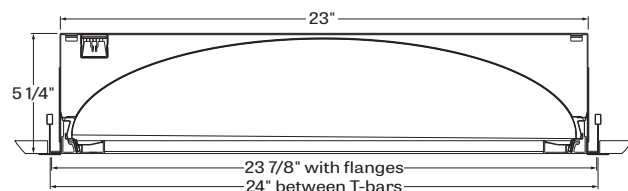


CAVA T- - TG15 - tegular 15/16"

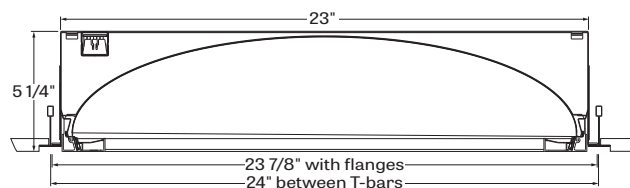


CAVA T- - ST- screw slot t-bar

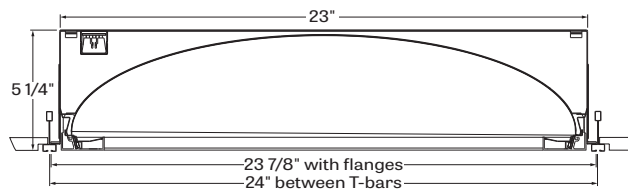

CAVA T- - TB9 - t-bar 9/16"

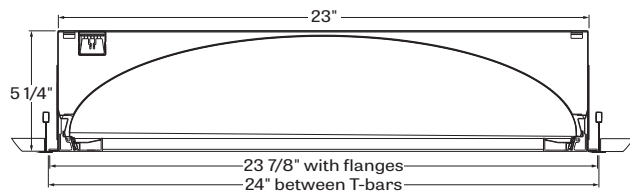

CAVA T-- DW- drywall kit

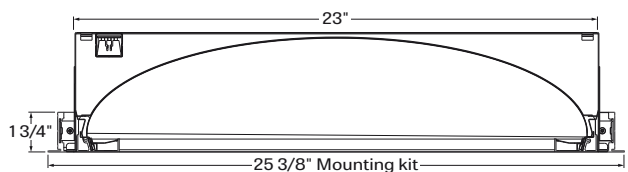

CAVA T 2x2 LED

RECESSED

LUMENWERX
WWW.LUMENWERX.COM

OPTICS

REDUCED LUMINANCE OPTIC (RLO) - Reduced Luminance Optic (RLO) consists of indirect-mounted LED arrays illuminating a vaulted reflector with a matte white finish greater than 95% reflectivity. The ultra-shallow arrays in RLO completely conceal the light source while evenly distributing brightness over the entire surface of the cavity using a combination of multiple reflective bounces and a very high diffuse reflectivity. Compared to diffusing optics, RLO reduces luminaire brightness due to the visible interior surface being larger than the aperture.

LIGHT SOURCE - LED

Custom array of mid-flux LED's are mounted directly to the housing for optimal thermal performance. Available in 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	4000K	21	2500	118
medium output	4000K	30.5	3500	114
high output	4000K	41	4500	110
ultra high output	4000K	46.5	5000	107

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% (specify 2-wire, or Ecosystem Dim-to-Off), Lutron 5-Series (5% Ecosystem), DMX (RDM compatible) and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.


For our drywall-mounted fixtures, a remote driver is provided.

EMERGENCY


Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation, up to 1300 lumens (25°C) emergency lighting output. Recharge time of 24 hours.

MOUNTING OPTIONS


Recess mount into exposed or concealed T-Bar or Tegular grid ceiling




TG9 - tegular 9/16"




TG15 - tegular 15/16"



TB9 - t-bar 9/16"





TB15 - t-bar 15/16"



ST - screw slot t-bar

A separate kit for mounting fixtures into drywall ceilings

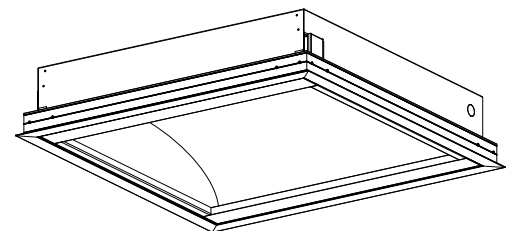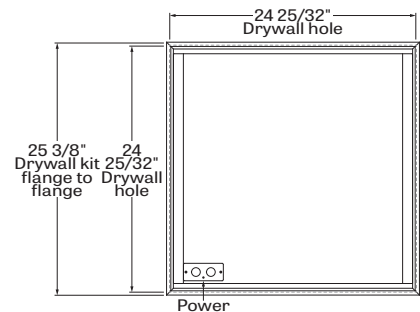

DF - drywall kit

CAVA T 2x2 LED

RECESSED

LUMENWERX
WWW.LUMENWERX.COM

FINISH

Interior reflectors - 95% reflective, matte white powder coating

Exterior - matte white powder coating.

Custom finish is also available.

CONTROLS

LumenWerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

STANDALONE CONTROLS

An integrated standalone sensor controls the luminaire in which it is installed.

Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently.

Unless otherwise agreed, location and functionality of the sensor within the luminaire are selected by LumenWerx.


Three types are available:

OMS: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used.

Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

ODS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

OCS: Both an occupancy and a daylight sensor are installed in the luminaire.



Location of an Onboard control

CONNECTED CONTROLS

With Connected Controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron*, Enlighted, Osram ENCELUM, Acuity nLight, Crestron and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

LumenWerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by LumenWerx, depending on the control system manufacturer.

LumenWerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a LumenWerx luminaire with Connected Controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact controls@lumenwerx.com to assure complete compatibility with intended control system and to fully specify the luminaire. Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for LumenWerx to create shop drawings and submittals.

* Lumenwerx offers a Lutron Vive-Enabled fixture option using either the DFCSJ-OEM-OCC (OCS Option) or DFCSJ-OEM-RF (wireless only, no sensor) Integral Fixture Modules and a DALI or EcoSystem LED driver based on customer dimming requirements.

Please contact our controls department at controls@lumenwerx.com for further assistance.

CONSTRUCTION

Housing - Die formed cold rolled sheet steel 20 gauge thick, matte white powder coating

Main reflector - Extruded Aluminum (0.019" thickness), 98% reflective matte white painted.

Internal reflectors - 95% reflective semi-specular extruded Aluminum (0.020" thickness).

Door end-plates - Die formed cold rolled sheet steel 16 gauge thick, matte white powder coating.

Door sides - Extruded Aluminum (0.060" nominal thickness)

Internal brackets - Die formed cold rolled sheet steel 22 gauge thick.

Drywall kit - Extruded Aluminum 0.07" nominal, matte white powder coating.

WEIGHT

Cava T 2x2: 19.06 lbs. - 8.65 kg

CERTIFICATIONS

ETL - Rated for Indoor Dry/Damp locations.

Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Chicago plenum - City of Chicago Approved (CCEA)

IC rated - suitable for direct contact with insulation.

CAVA T 2x2 LED

RECESSED

LUMENWERX
WWW.LUMENWERX.COM

WARRANTY


LumenWerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. LumenWerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

CAVA T 2x2 LED

RECESSED

LUMENWERX
WWW.LUMENWERX.COM


2500 LUMEN AT 80CRI - LOW OUTPUT

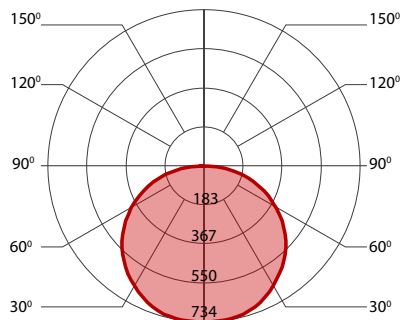

PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	2700K	23	2500	108
low output	3000K	22.5	2500	111
low output	3500K	21.5	2500	115
low output	4000K	21	2500	118


3500 LUMEN AT 80CRI - MEDIUM OUTPUT

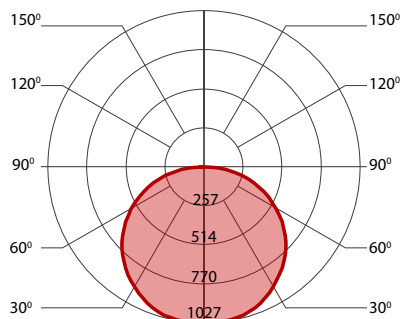

PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
medium output	2700K	33.5	3500	104
medium output	3000K	32.5	3500	107
medium output	3500K	32	3500	110
medium output	4000K	30.5	3500	114


4500 LUMEN AT 80CRI - HIGH OUTPUT

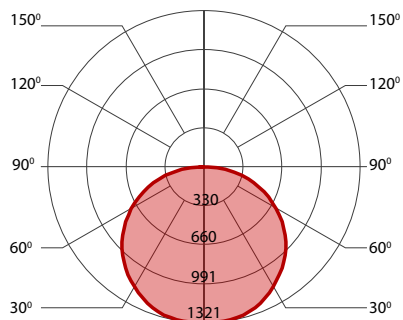

PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
high output	2700K	44.5	4500	101
high output	3000K	43.5	4500	104
high output	3500K	42	4500	107
high output	4000K	41	4500	110

5000 LUMEN AT 80CRI - ULTRA HIGH OUTPUT

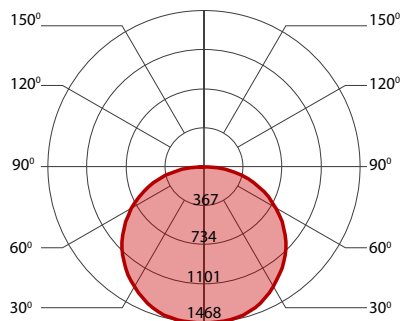

PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
ultra high output	2700K	51	5000	98
ultra high output	3000K	50	5000	100
ultra high output	3500K	48.5	5000	103
ultra high output	4000K	46.5	5000	107