

CLUSTER COMBO

GRID CEILING - INSTALLATION INSTRUCTIONS


NOTE: Wire dimming conductors as Class 1



This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.


Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

1 SINGLE FIXTURE

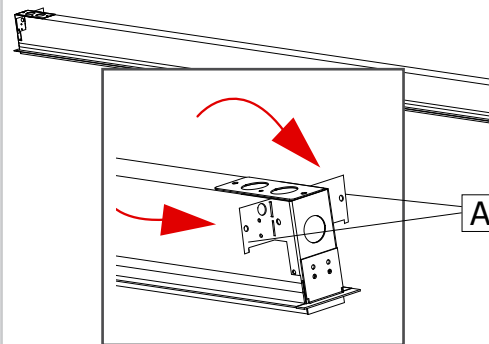


Make sure the power to the fixture is turned off. Bend the tabs (A) on the end of the fixture. For a continuous system, leave tabs close.

2

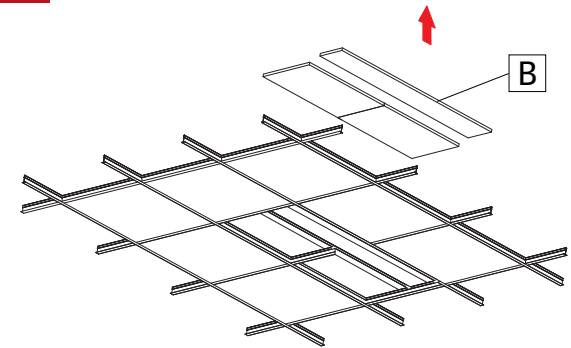


Remove ceiling tiles (B) where the fixture will be installed as well as the adjacent tiles for easy access during installation.

3

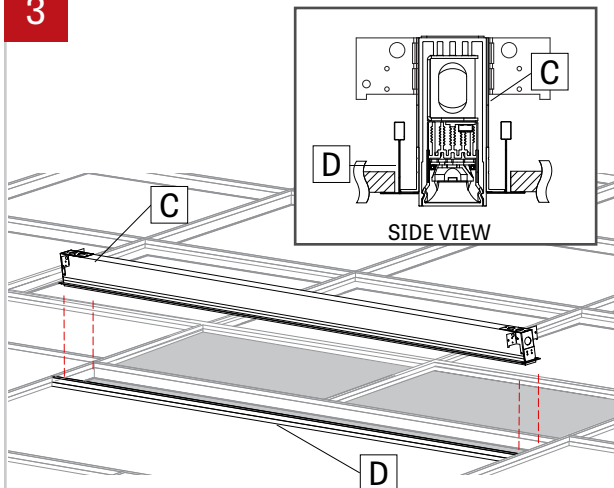


Raise the fixture above the ceiling and lower the fixture (C) onto the T-bars (D).

4

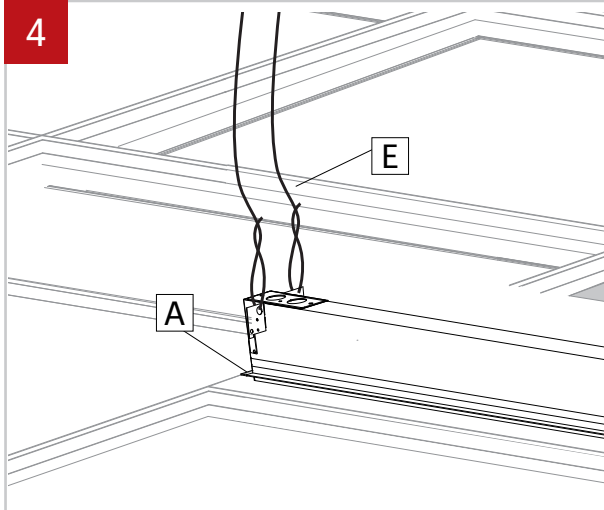

Safety wires (E) should be attached to the tabs (A).

5

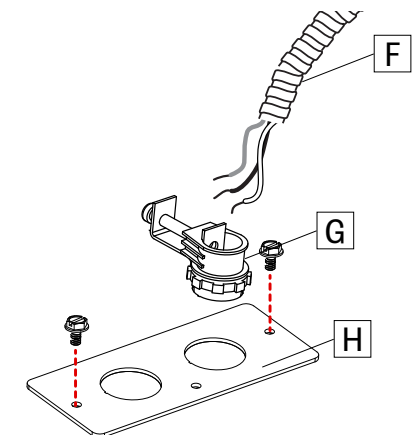

Remove power plate (H) from fixture and install BX connector (G) (by other) and BX cable (F) (by other) through the power plate. Tighten BX connector (G) screw.

CLUSTER COMBO

GRID CEILING - INSTALLATION INSTRUCTIONS

