


NOTE: Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

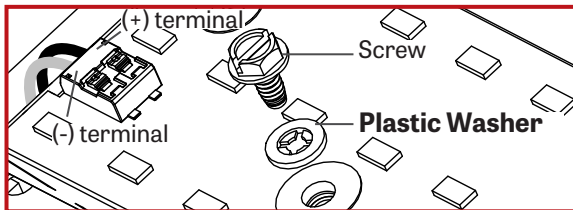


1 SINGLE FIXTURE

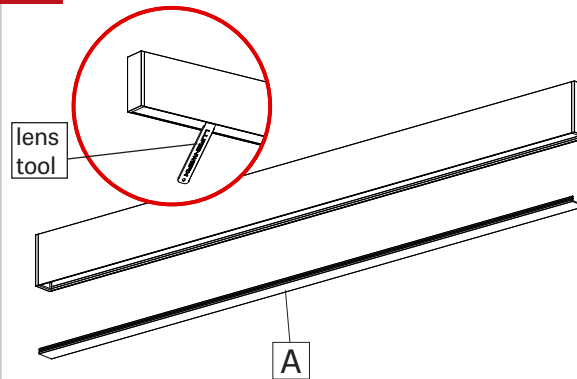


Remove the lens (A) with the included lens tool.

2

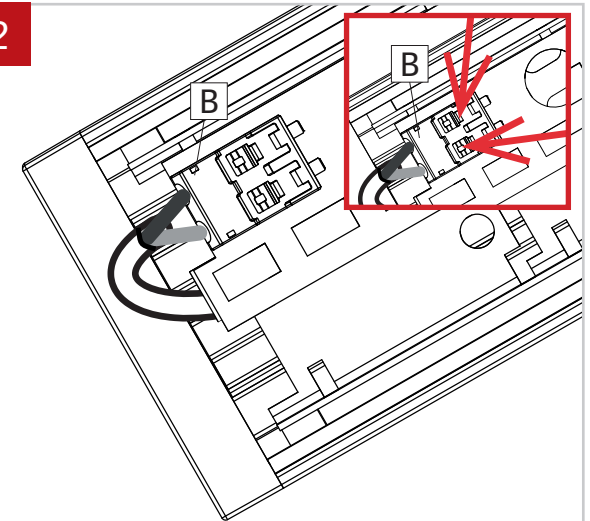


Disconnect LED molex connector (B) by taking a pointed object and pressing on the two tabs on the top.

3

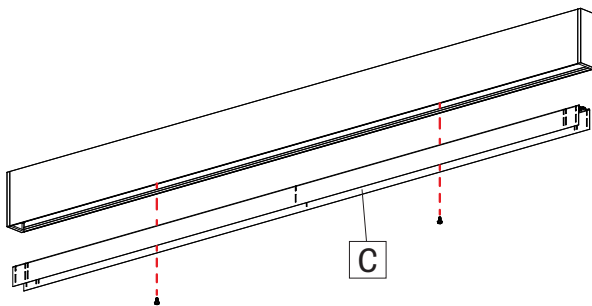


Remove cartridges (C) from all fixtures.

4






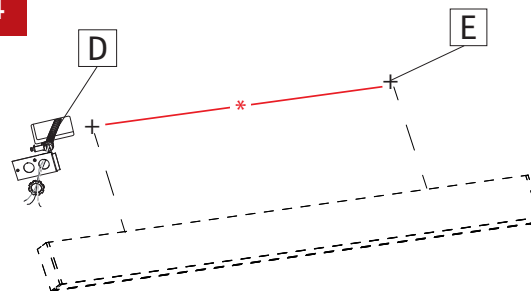








Locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions supplied in client drawings.

5

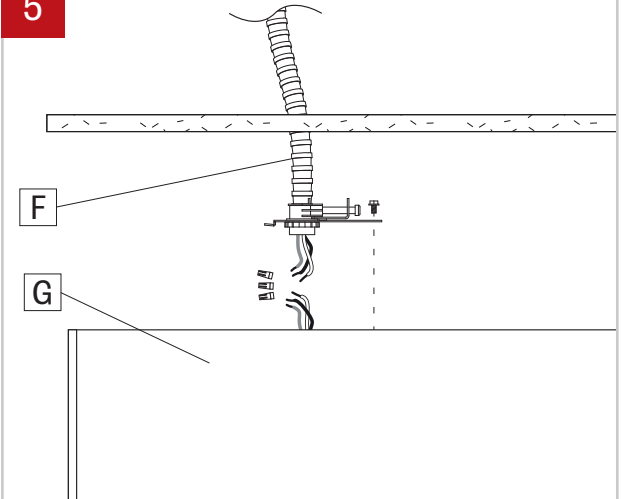


Make electrical connections between main power (F) and fixture (G). **Number of wires may vary.**

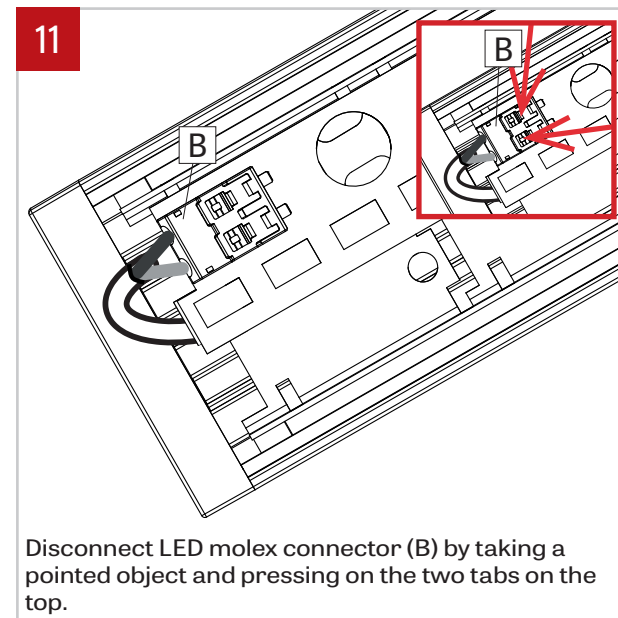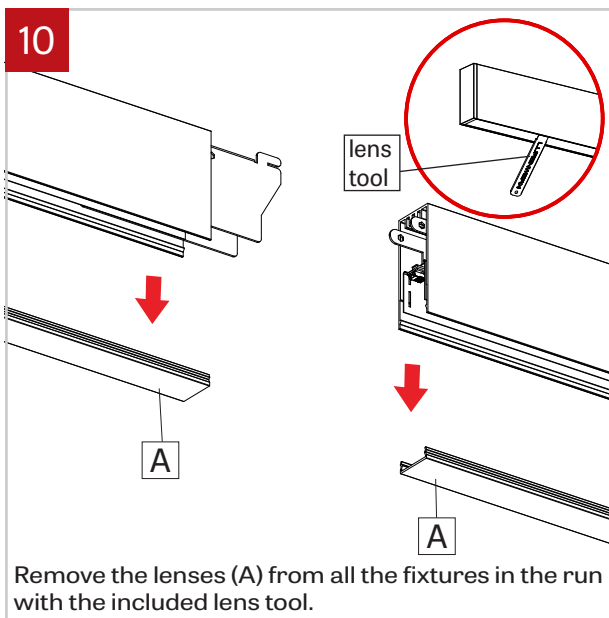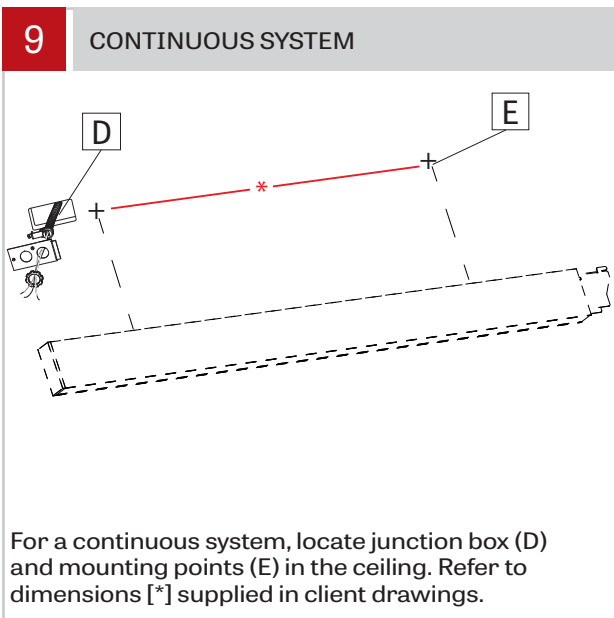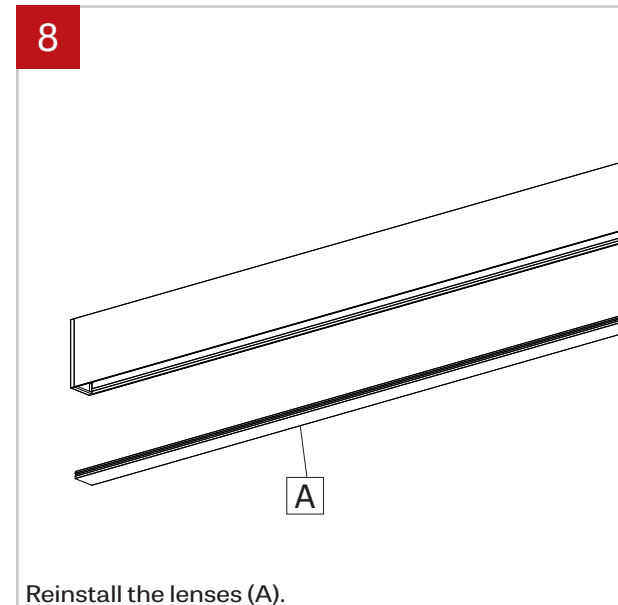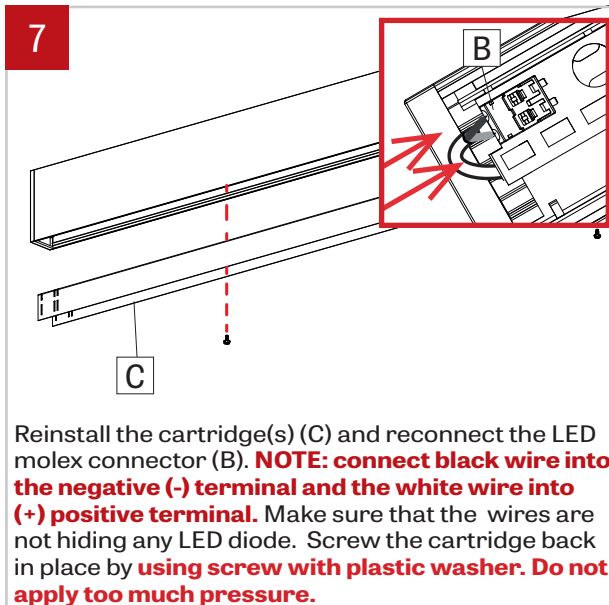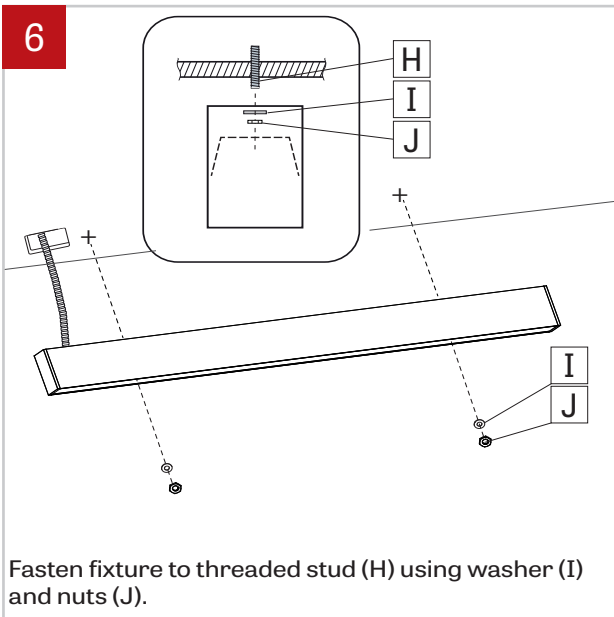

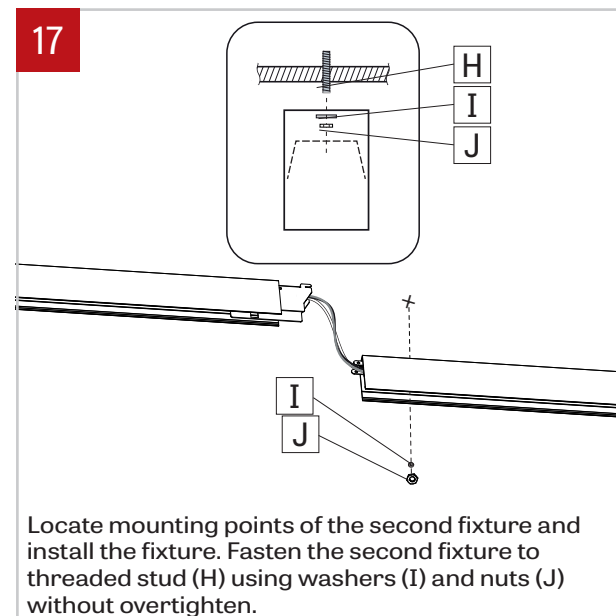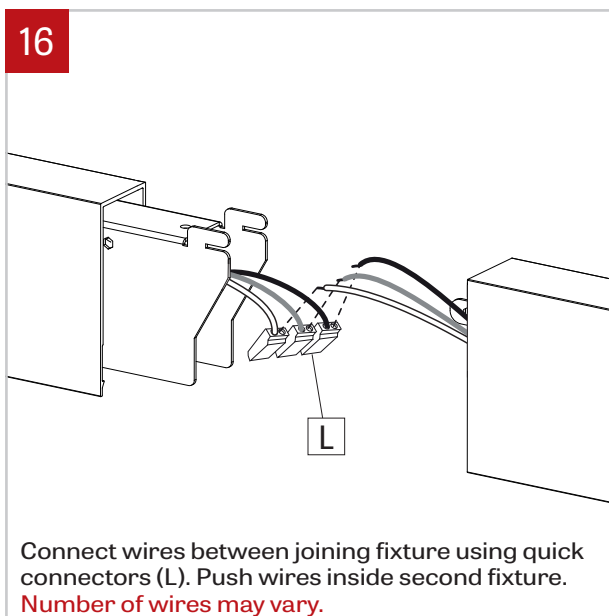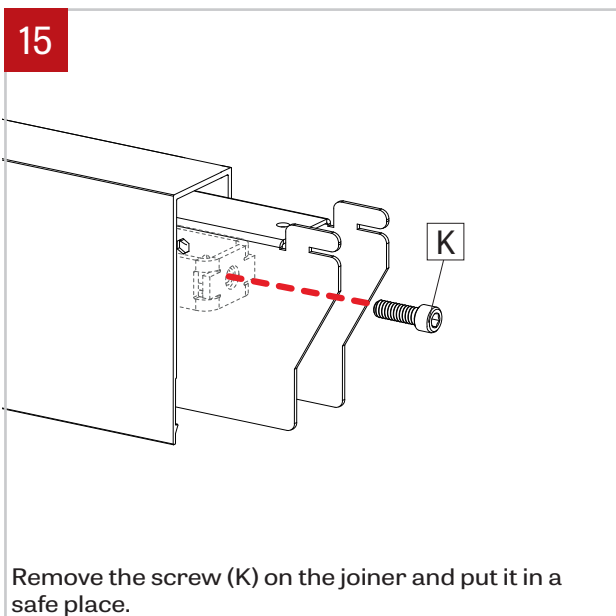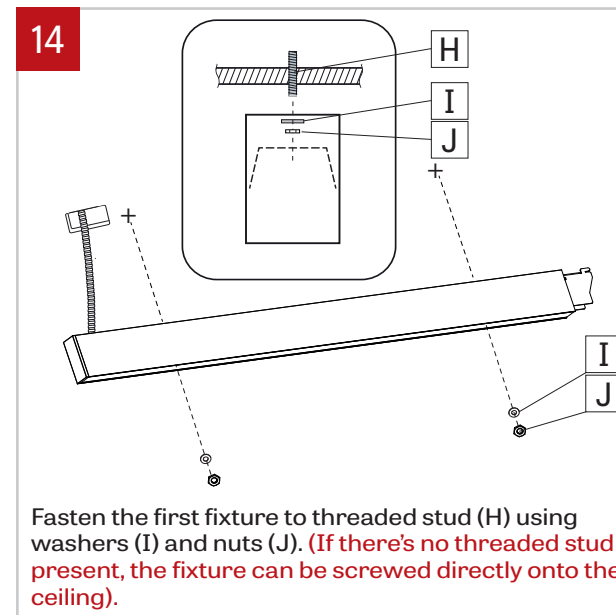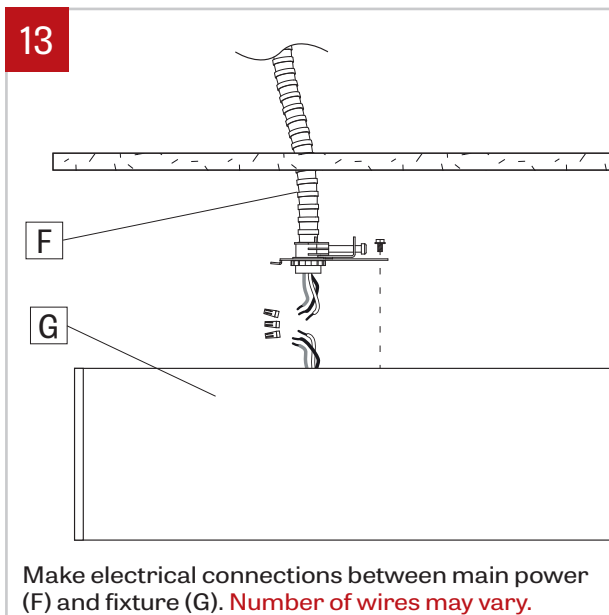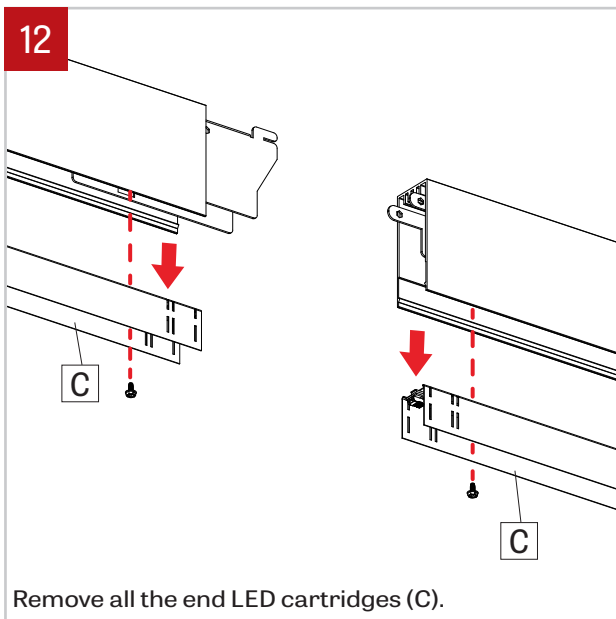


18

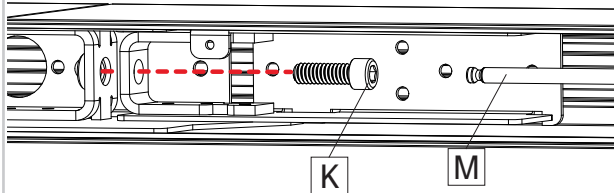


Join fixtures using align pins as guide. Put back in place the provided screw (K) (using 3/16" Ball-End Screwdriver (M) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (K) to pull the extrusions together. Repeat steps 15 to 18 for all other fixture. Then tighten all washers and nuts on threaded studs to secure the fixtures.

19

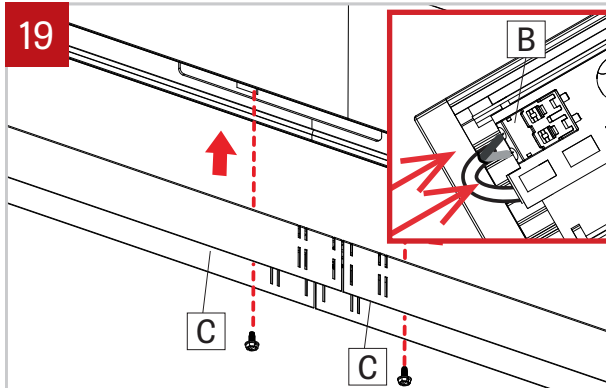

Reinstall the cartridges (C) and reconnect the LED molex connector (B). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place by **using screw with plastic washer. Do not apply too much pressure.**

20

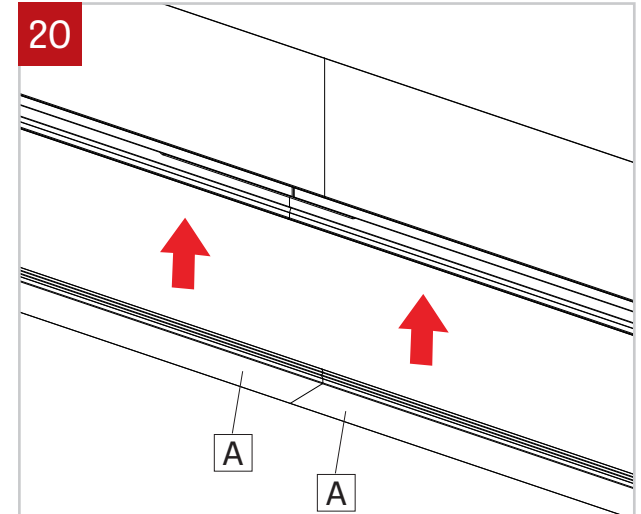

Put the lenses (A) back in place.