


IMPORTANT: Installation INST. are shown with direct and applies to indirect & direct/indirect

NOTE: Wire dimming conductors as Class 1



Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

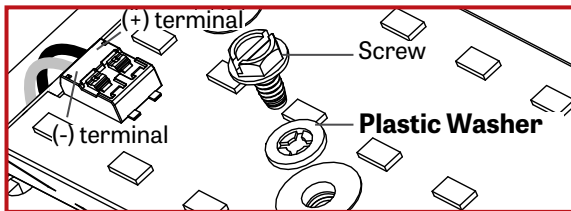


This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. la mise à terre électrique est obligatoire pour la sécurité.


1

SINGLE FIXTURE

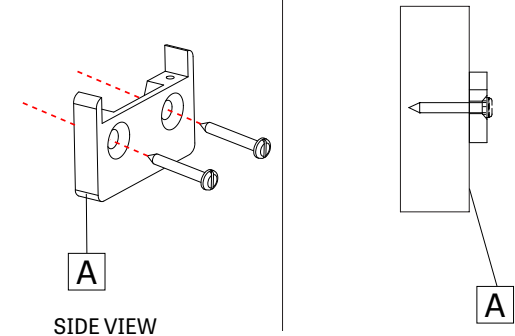


Locate wall bracket position using provided client drawing. Install mounting brackets (A) to wall. Align with structural stud (need double studs – distance between screws is 1.250") or use metal anchors with min. length 1.250". Flat head Philips drive screw, nominal size #10, min. length 1.250".

2

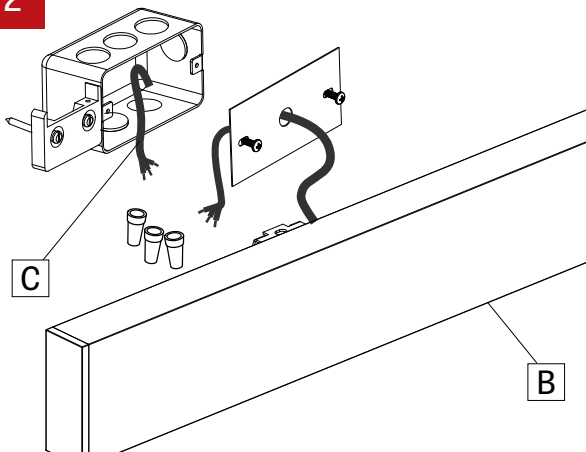

Make wire connection between fixture (B) and wall power cable (C). **Number of wires may vary. Warning: Power must come from Single branch circuit.**


3

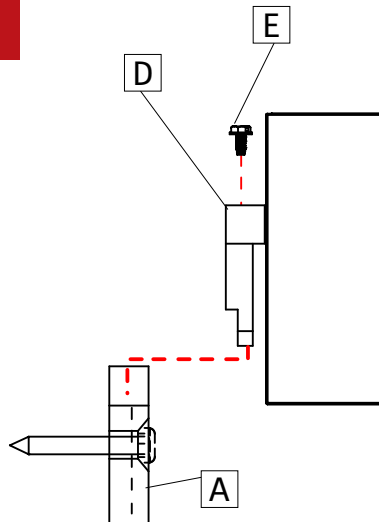


Insert fixture bracket (D) into wall bracket (A), and secure in place with supplied screws (E).

4


CONTINUOUS SYSTEM

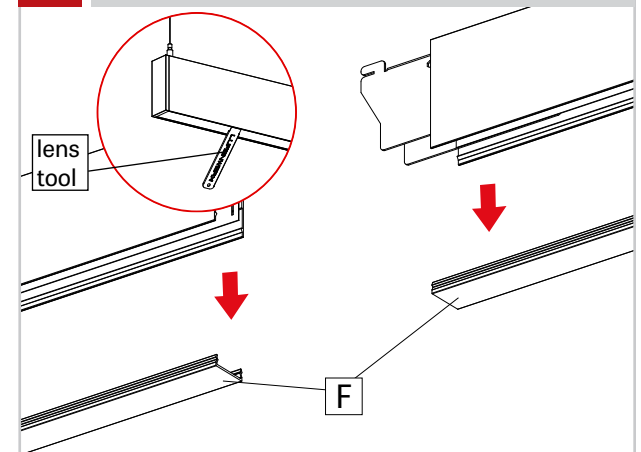


Remove the lenses (F) of all the fixtures in the run with the included lens tool. If direct/indirect or indirect, also remove the top lenses.

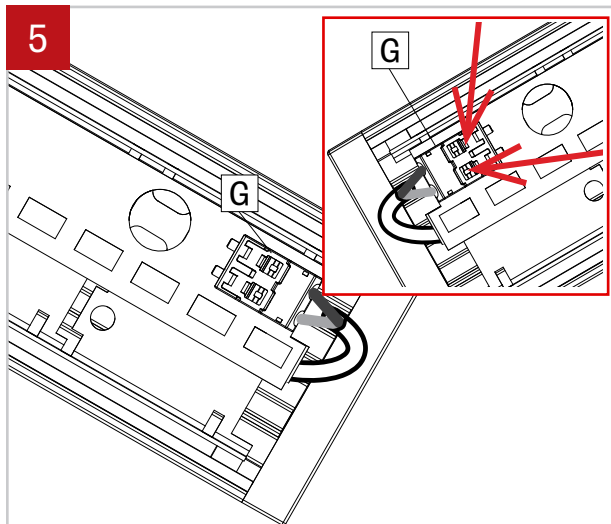


Disconnect LED mox connector (G) by taking a pointed object and pressing on the two tabs on the top.

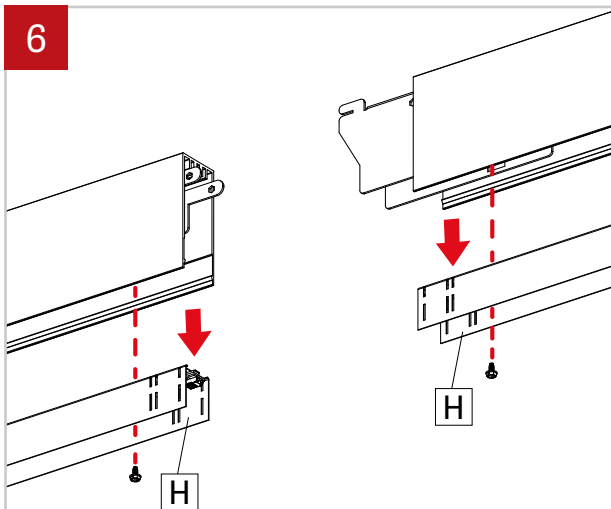


Remove all the end LED cartridges (H). If direct/indirect or indirect, also remove the top cartridge.

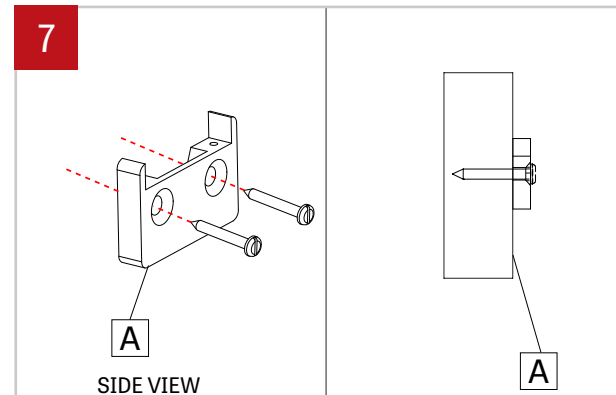


Locate wall bracket position for the second fixture using provided client drawing. Install mounting brackets (A) to wall. Align with structural studs (need double studs – distance between studs is 1.250") or use metal anchors with min. length 1.250". Flat head Philips drive screw, nominal size #10, min. length 1.250".

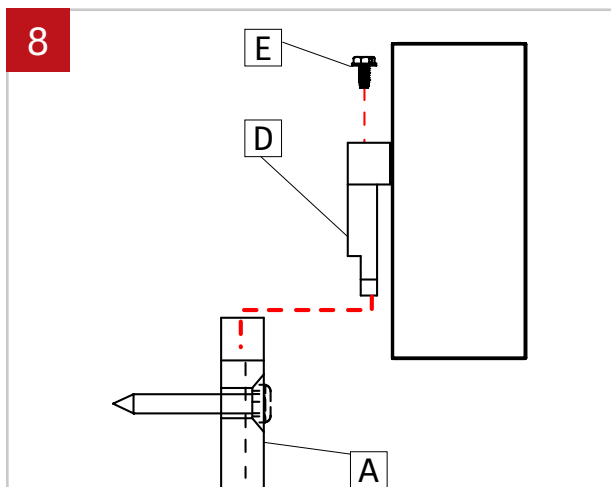

Insert the first fixture bracket (D) into wall bracket (A), and secure in place with supplied screws (E). Do not overtighten.

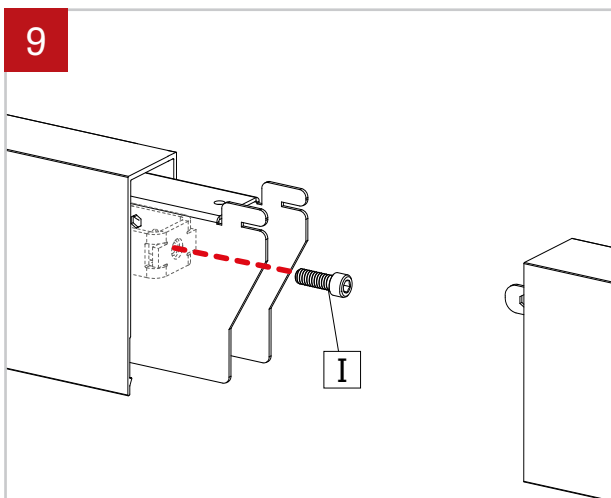


Remove the screw (I) on the joiner and put it in a safe place.

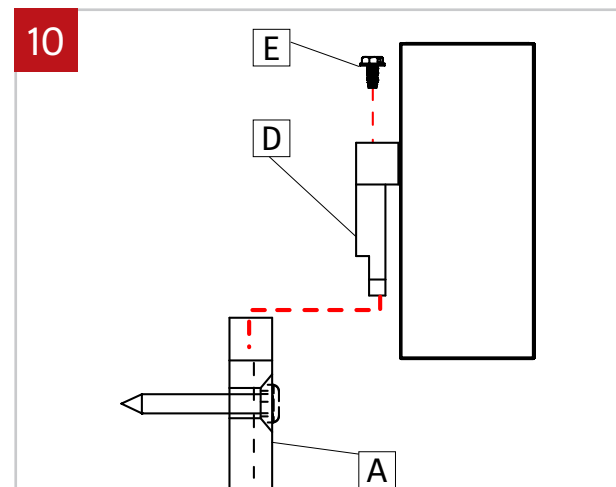


Insert the second fixture bracket (D) into wall bracket (A), and secure in place with supplied screws (E). Do not overtighten.

5

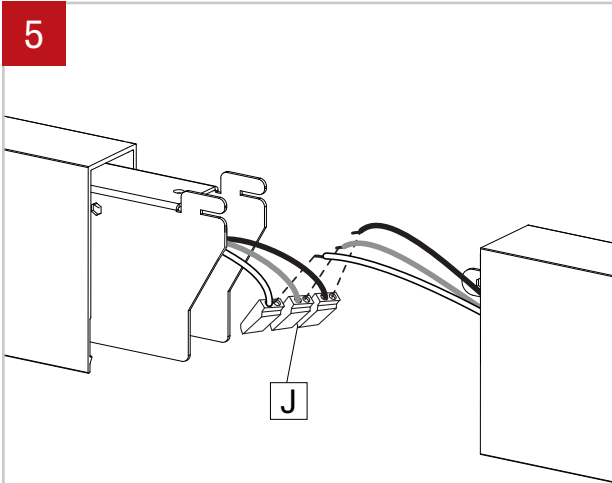


Connect wires between joining fixtures using quick connectors (J). **Number of wires may vary.**

6

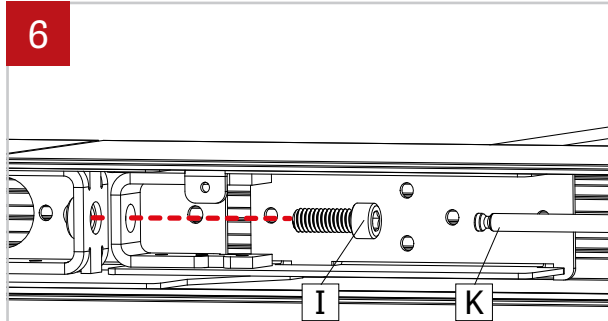


Join fixtures using align pins as guide. Put back in place the provided screw (I) (using 3/16" Ball-End Screwdriver (K) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (I) to pull the extrusions together. Repeat steps 9 to 12 for all other fixture. Then tighten all screws on mounting brackets.

7

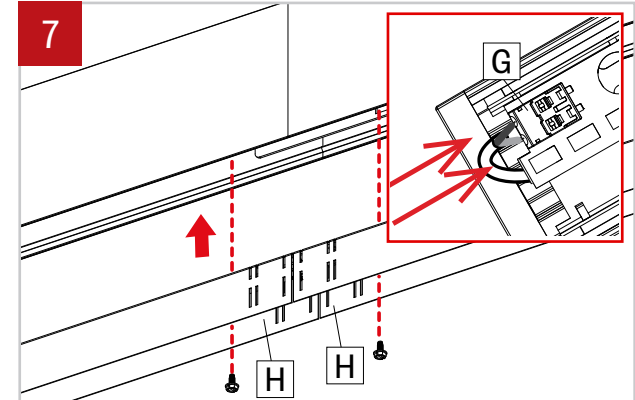

Reinstall the cartridge (H) and reconnect the LED molex connector (G). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place by **using screw with plastic washer.** **Do not apply too much pressure.**

8

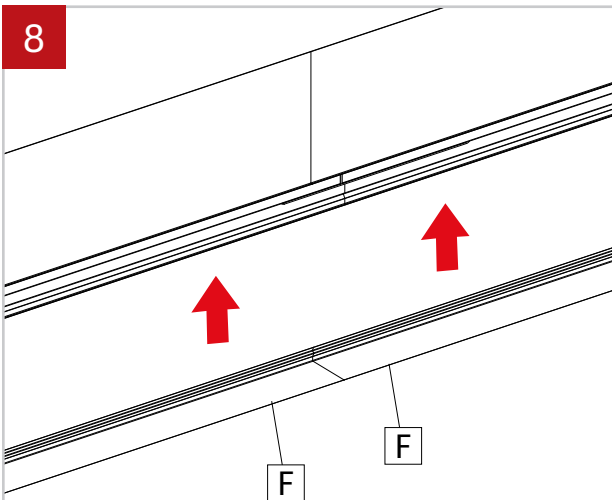

Put the lenses (F) back in place.