


CLUSTER

PENDANT PLANAR PARABOLIC

LUMENWERX

DESCRIPTION

Cluster is the precise, and scalable family of downlights, wall washers, and adjustables, available in both linear and planar configurations and for recessed, pendant, and surface mounting. Based on a fundamental 1.2" square cell, Cluster delivers lighting that is optically sophisticated and aesthetically refined. Cluster pendant planar parabolic downlights is available in 2x2 cell configurations, all with precision optics that eliminate multiple shadows, as well as subtle louver treatments. Surface downlights fit a choice of 3", 8" or 12" deep cuboid enclosures. Nominal light output is 200 lumens per cell. With our remote driver, Chromawerx Duo and Sola are available for tunable white lighting control. Pendant Cluster can be suspended using stems. A canopy for conduit connection is available. Driver is either integral or remote, which is capable of powering multiple luminaires.

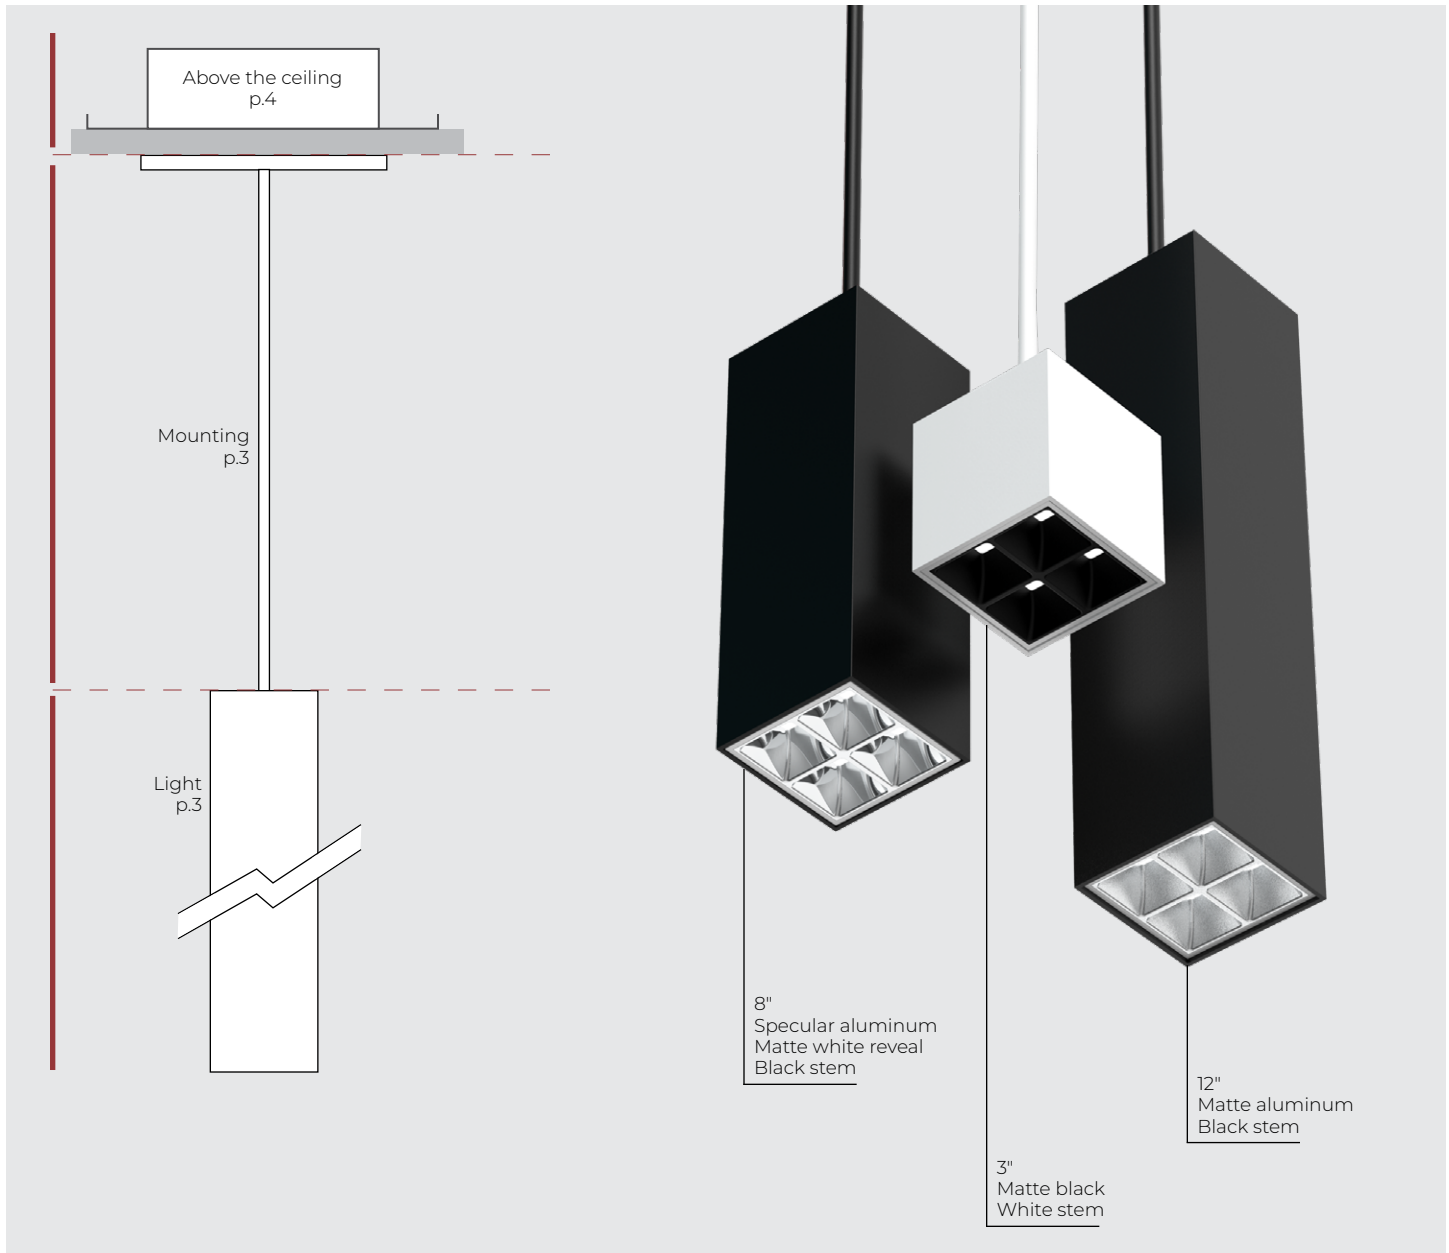

CLUSTER

PENDANT PLANAR PARABOLIC

LUMENWERX

Project: _____

Type: _____

Order Guide

LIGHT

LUMINAIRE ID	CUBOID HEIGHT	CUBOID FINISH	LOUVER FINISH	REVEAL FINISH	LIGHT SOURCE	OPTIC	CRI
CLU22PPAR						PAR	90CRI
CLU22PPAR - Cluster 2x2 Pendant Parabolic	3IN - 3" 8IN - 8" 12IN - 12"	FTMW - Textured matte white FTMB - Textured matte black CF# - Custom finish, specify RAL#	MWPL - Matte White Parabolic Louver MBPL - Matte Black Parabolic Louver MPL - Matte Parabolic Louver SPL - Specular Parabolic Louver	FTMW - Textured matte white FTMB - Textured matte black CF# - Custom finish, specify RAL#	SW - Static white SOLA ¹ - Dim-to-warm single channel control 35K to 22K DUO ¹ - Tunable white 2-channel control 65K to 27K ¹ Not available with integral driver option.	PAR - Parabolic	90CRI - 90 CRI
COLOR TEMP.	DRIVER	VOLTAGE	LUMEN PACKAGE ²	DIMMING	CANOPY TYPE ⁴	CANOPY FINISH	SUSPENSION
27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K SOLA - Dim-to-warm single channel control 35K to 22K DUO - Tunable white 2-channel control 65K to 27K	INTEGRAL	120V - 120V 277V - 277V	CLU22PPAR 735LM - 735 lm ² Lumen packages shown at 3500K, with SPL. For other, see lumen output multipliers on page 4.	D1 - 1% 0-10V ELV ³ - ELV 120V TRI ³ - TRIAC 120V ³ Available with 120V only.	FLS ⁵ - Flat square canopy, 4" octagonal junction box DS - Deep square canopy, driver in canopy CDS - Conduit feed, square canopy ⁴ See page 3 for details. ⁵ Not available with 3" cuboid height when specified with integral driver.	FTMW - Textured matte white FTMB - Textured matte black CF# - Custom finish, specify RAL#	STEM ⁶ BKS##IN - Textured black stem WHS##IN - Textured white stem CF#S##IN ⁷ - Custom finish stem ⁶ Min 18" - max 48", specify length (##) in inches. ⁷ Specify RAL#.
	REMOTE	DO NOT SPECIFY FOR REMOTE. SEE "REMOTE DRIVER BOX" SECTION BELOW.					

REMOTE DRIVER BOX

Ordered separately. Specify each required remote driver box on a separate line.

REMOTE DRIVER ⁸	LUMINAIRE QTY. ⁹	LUMINAIRE ID	VOLTAGE
		CLU22PPAR	
RDB# - Remote driver box ⁸ Specify an RDB number (#) for each required remote driver box.	#X - Number of luminaires ⁹ Specify number (#) of luminaires per remote driver.	CLU22PPAR - Cluster 2x2 Pendant Parabolic	120V - 120V 277V - 277V UNV - 120V-277V

LUMEN PACKAGE ¹⁰	DIMMING ¹¹		
	Low	Medium	High
CLU22PPAR ¹⁰ Watts and lumen per watts will vary based on the number of lighting units per remote driver as well as on the type of driver selected.	184LM - 184 lm	460LM - 460 lm	735LM - 735 lm
	RD1 - 1% 0-10V RDA ¹² - DALI RLDE1 ¹² - Lutron Hi-Lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V		
	SOLA RSD1 - Single 0-10V input		
	DUO RDMX ^{12,13} - DMX RDDA ¹² - DALI DT6 RDDA8 ¹² - DALI DT8 RDD1 - Dual 0-10V input for CCT/Intensity RLD2 ¹² - Lutron DALI-2 digital		
	¹¹ For configurations involving different cluster sizes on a remote driver, please consult factory. ¹² On-site commissioning is required. ¹³ To specify see pages 7 to 9.		

EXAMPLE CODE:

INTEGRAL DRIVER

LIGHT	CLU22PPAR-3IN-FTMW-SPL-FTMW-SW-PAR-90CRI-35K-INTEGRAL-120V-735LM-D1-DS-FTMW-WHS18IN	REMOTE DRIVER	N/A
-------	---	---------------	-----

REMOTE DRIVER



LIGHT	CLU22PPAR-3IN-FTMW-SPL-FTMW-SW-PAR-90CRI-35K-REMOTE-FLS-FTMW-WHS18IN	REMOTE DRIVER	RDB1-6X-CLU22PPAR-120V-460LM-RD1 RDB2-2X-CLU22PPAR-120V-460LM-RD1
-------	--	---------------	--




LIGHT

OPTICS


LOUVER FINISH - Louver is injection molded with integral texture and color

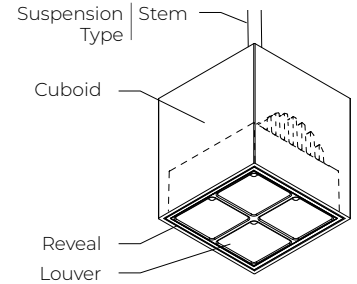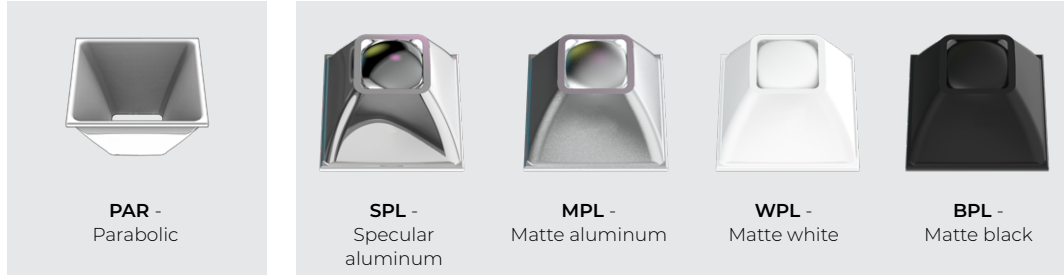

MOUNTING ¹

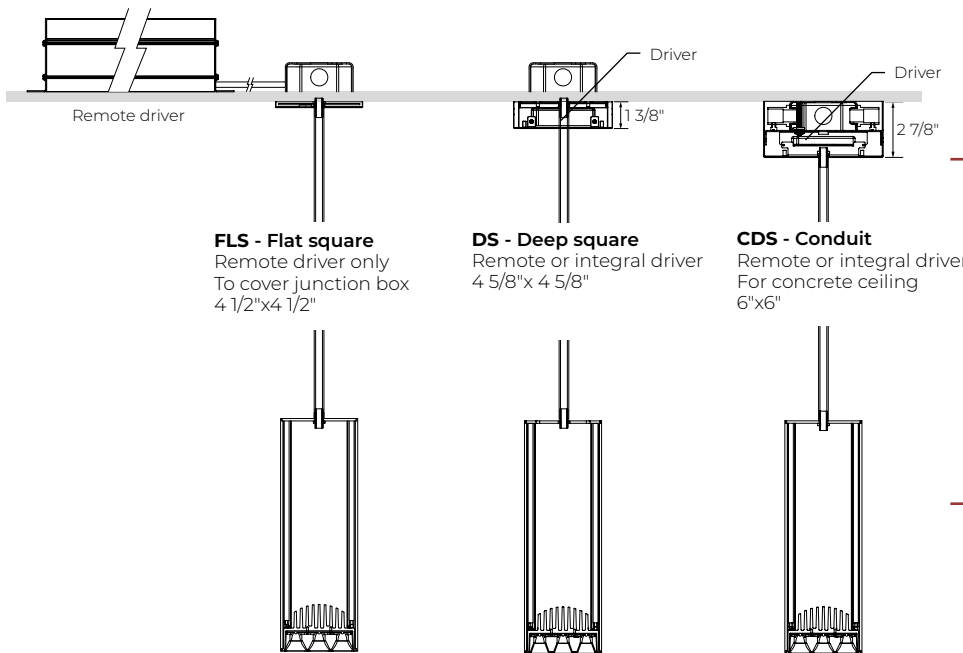

CANOPY	
Flat square	FLS
Deep square	DS
Conduit	CDS
Finish	
Textured matte white	FTMW
Textured matte black	FTMB
Custom finish	CF#

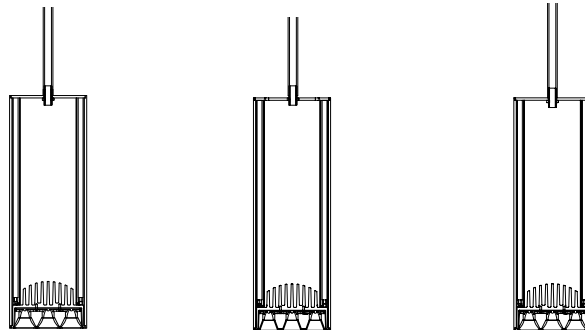


HANGER	
Stem	
Textured white stem	WHS
Textured black stem	BKS

Stem
Min 18" - max 48"
##IN specify length ²


¹ Canopies can be specified with any suspension type. Not interchangeable on site.

² To specify, replace ## with requested length. (e.g. 18IN)

BOTTOM VIEW



CROSS SECTION



See linear spec sheet for more sizes

DRIVER


INTEGRAL CANOPY DRIVER STATIC WHITE ONLY

The integral driver is sized to the lighting element and is connected directly with Class 2 wiring and quick-splice connectors. The driver is accessible for service through the canopy.

MULTIPLIER

LUMEN PACKAGE MULTIPLIER PER OPTIC

2700K				3000K				3500K				4000K			
SPL	MPL	BPL	WPL	SPL	MPL	BPL	WPL	SPL	MPL	BPL	WPL	SPL	MPL	BPL	WPL
0.94	0.81	0.58	0.94	0.97	0.83	0.6	0.97	1	0.86	0.62	1	1.02	0.88	0.63	1.02



LUMEN PACKAGE (AT 3500K, SPL) - INTEGRAL DRIVER

LUMINAIRE ID	LUMEN OUTPUT	WATTS	EFFICACY LM/W
CLUP22	735 lm	9.5 W	78 lm/W

LUMEN PACKAGE	VOLTAGE	INTEGRAL DRIVER
Use the multiplier tables to calculate the lumen package	120 - 120V 277 - 277V	DI - 1% 0-10V ELV ¹ - ELV 120V TRI ¹ - TRIAC 120V ¹ Available with 120V only.

REMOTE DRIVER STATIC WHITE, DUO & SOLA

The remote driver can power several lighting elements, depending on their total power. The minimum and maximum number for each lighting element and driver type are shown in the table below and must be observed. The remote driver and lighting elements are wired together through connection boxes, which are furnished pre-wired to the driver enclosure. All wiring is Class 2 with quick-splice connectors. The remote driver requires access from above the ceiling (or an access panel).

OPTIC MULTIPLIER TABLE

SPL	MPL	BPL	WPL
1	0.853	0.606	0.996

LUMEN PACKAGE¹ (AT 3500K, SPL) - REMOTE DRIVER


Use the optic multiplier table to calculate the lumen package for other optics

LUMINAIRE ID	LUMEN PACKAGE			VOLTAGE	REMOTE DRIVER	NUMBER OF LIGHTING UNITS PER DRIVER
CLUP22	LOW 184 lm	MEDIUM 460 lm	HIGH 735 lm	120 - 120V 277 - 277V UNV - 120V-277V	STATIC WHITE RD1 - 1% 0-10V RDA ² - DALI RLDE1 ² - Lutron Hi-lume 1% Eco ² On-site commissioning is required. ³ Available with 120V only. DUO RDMX ² - DMX, to specify see pages 7 to 9 RDA ² - DALI RDD1 - Dual 0-10V input for CCT/intensity SOLA RSD1 - Single 0-10V input	See table below for maximum and minimum possible number of lighting units per each driver. For configurations involving different cluster sizes on a remote driver, please consult factory.

¹ Watts and lumen per watts will vary based on the number of lighting units per remote driver as well as on the type of driver selected.

NUMBER OF LIGHTING UNITS PER DRIVER - MINIMUM AND MAXIMUM

DRIVER TYPE	CLUP22
SW	
DI - 1% 0-10V	1-6
DA - DALI	1-6
LDE1 - Lutron Hi-lume 1% Eco	1-6
DUO	
DMX - DMX	2-4
DA - DALI	2-3
DD1 - Dual 0-10V input for CCT/intensity	2-4
SOLA	
SD1 - Single 0-10V input	2-4

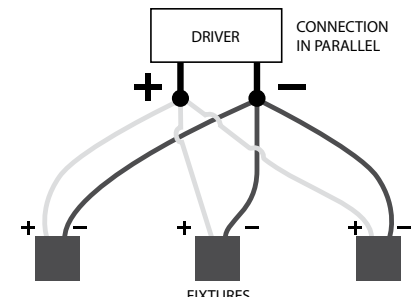

For any quantities of lighting units per driver that fall outside the minimum and maximum listed above, please consult factory.

Technical Specifications

OPTICS

PARABOLIC LOUVERS (SPL, MPL, WPL, BPL)

Parabolic louver optics provide excellent shielding and a pleasing crisp visual texture. The precisely molded louvers consist of 1" deep blades and side reflectors with shielding of 50° lengthwise and 45° cross wise.

The parabolic contour of the blades and side reflectors direct light into a comfortable downlight distribution with a spacing criterion of 1.1, while minimizing shadows from the LED array above each cell.

Four finishes are available. Specular aluminum (SPL) provides higher efficacy, sharper cut-off, and an ultra-quiet appearance at shallow viewing angles. matte aluminum (MPL) offers a softer appearance, a wider beam spread, and gentle brightness transition at cut-off. Matte white (WPL) creates the highest louver brightness, while matte black (BPL) provides a dark appearance with slightly reduced beam spread.

LIGHT SOURCE

Static White


Custom array of mid-flux LEDs mounted onto aluminum-backed circuitry. Available in 2700K, 3000K, 3500K and 4000K with a minimum 90 CRI with elevated R9 value. Color consistency is maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Chromawerx SOLA

It is a single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple analog control sends a common signal to dual output digital drivers, which are programmed to adjust a specially populated LED array to emulate the effect of dimming a filament source. Dimming range is programmable but the default option runs from 3500K at 100% of full power to 2200K at 5% of full power. CRI is maintained above 80 throughout the dimming range.

Chromawerx DUO

It is a two-channel control. It uses an analog (0-10V) protocol for separate control of luminaire CCT and intensity or a digital (DMX, DALI) protocol for synchronous control of both warm and cool LED arrays to enable the user to set color temperature and light output. Commonly called "tunable white", Chromawerx two-channel control provides the range of cool (6500K) to color warm (2700K) that can be useful for helping to entrain circadian rhythms, stimulate alertness for improved educational and work productivity, and compensate for jet lag, among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. CRI is maintained above 80.



ELECTRICAL

SOLA

SDI

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using a single 0-10V control signal, the light output warms in color temperature as it dims down to 1% and 2200K. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

DUO

DMX

Factory-set adjustable output current electronic driver with 120-277V AC line input. Using DMX wall controls (optionally supplied by Lumenwerx) or an existing DMX control system, both channels of LEDs are independently adjustable. Each DMX driver can be independently addressed using the built-in RDM (Remote Device Management) in the field. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency<84%, PF>0.9, THD<20%.

DALI

Factory-set adjustable output current electronic driver with 120-277V AC line input. Using an existing DALI control system (supplied by others), one control channel adjusts the fixture color temperature, and the other control channel adjusts fixture brightness. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency<84%, PF>0.9, THD<20%.

DDI

Factory-set adjustable output current LED driver with universal (120-277VAC) input. Controlled via two individual 0-10V signals, one for setting light output down to a minimum of 1% and the other for adjusting the CCT (default range of 2700K-6500K). Rated life of 50,000 hours at 70°C maximum driver case temperature and 100% load conditions. Typical efficiency of 86%, PF>0.9, THD<20% at 100% load conditions.

CLUSTER

PENDANT PLANAR PARABOLIC

LUMENWERX

WEIGHT

	BODY		CUBOID 3"		CUBOID 8"		CUBOID 12"	
	Lb	Kg	Lb	Kg	Lb	Kg	Lb	Kg
CLUP22	0.70	0.30	0.38	0.17	0.87	0.40	1.27	0.58

CONSTRUCTION

Housing - Die-cast aluminum (0.95" nominal)

Optics - Polycarbonate

Cuboid - Aluminum extrusion

Cover pendant - 18 gauge aluminum sheet

Extension bar - Galvanized steel


CERTIFICATIONS

ETL - Rated for indoor dry/damp locations. Conforms to UL 1598 Standard and certified to CAN/CSA Standard C22.2 No. 250.0


WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.


PARABOLIC LOUVERS




SPL - Specular Parabolic Louver



MPL - Matte Parabolic Louver




BPL - Black Parabolic Louver

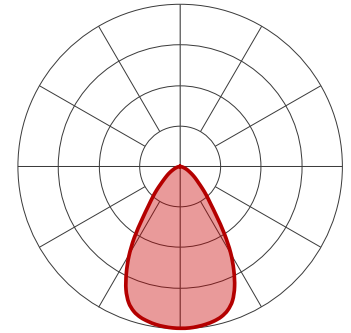

WPL - White Parabolic Louver

DUO GENERIC DMX NETWORK ARCHITECTURE


A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

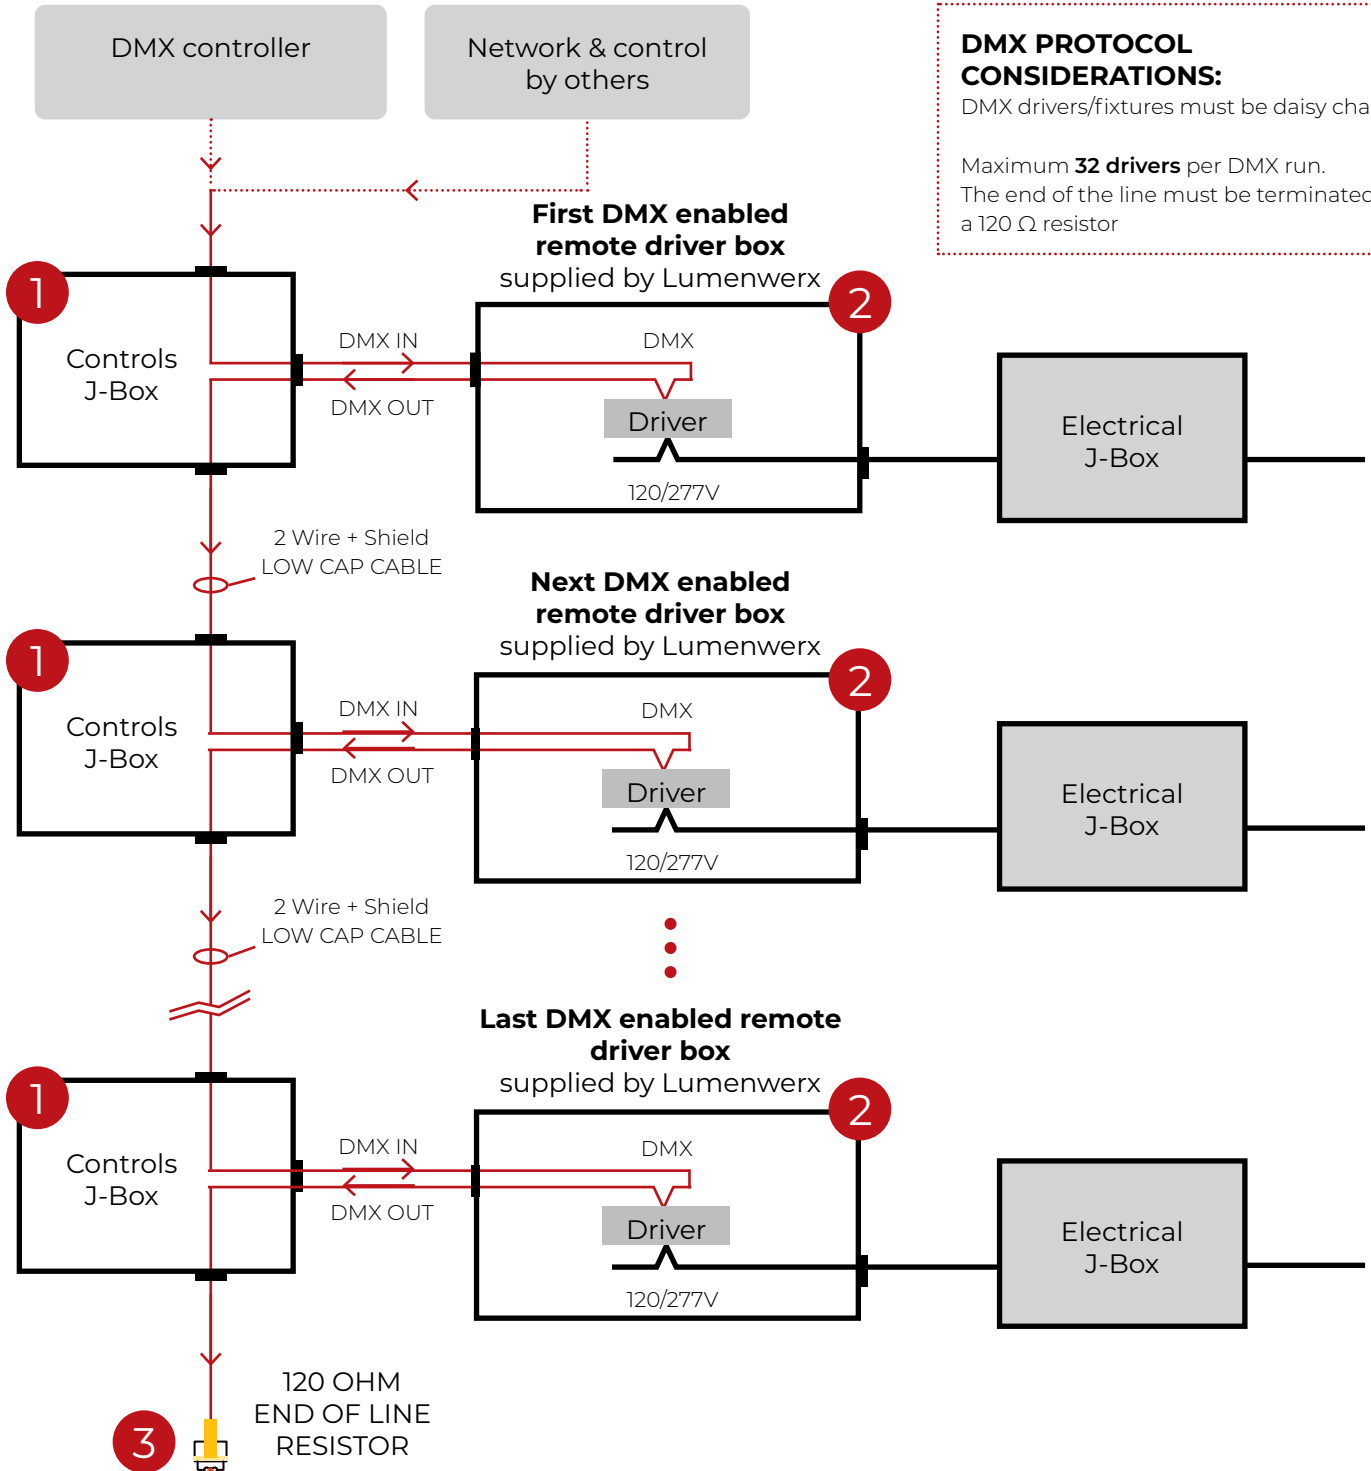


DMX PROTOCOL CONSIDERATIONS:
DMX drivers/fixtures must be daisy chained.

Maximum **32 drivers** per DMX run.
The end of the line must be terminated by a 120 Ω resistor

1 J-BOX DMX DAISY CHAIN DETAIL

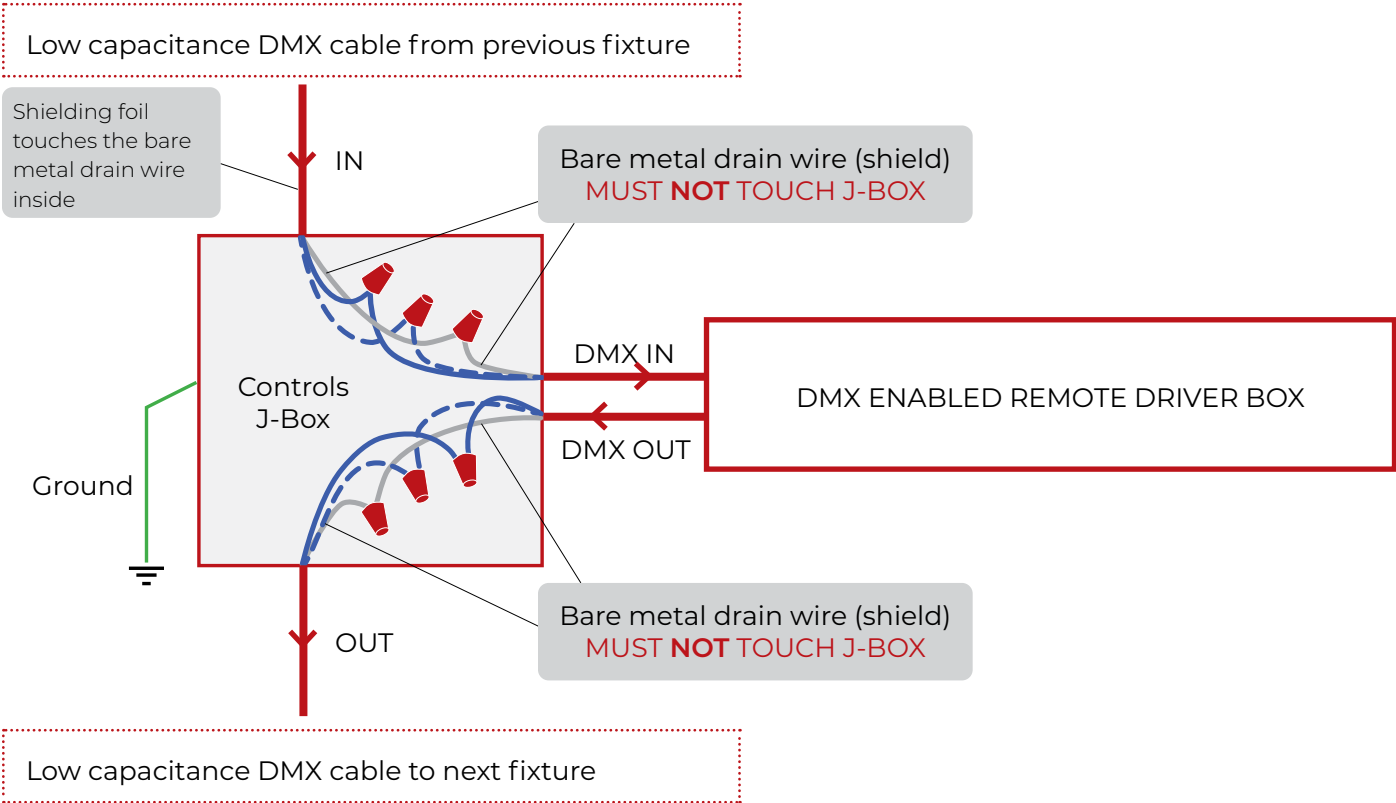

2 DMX CONNECTION REMOTE DRIVER

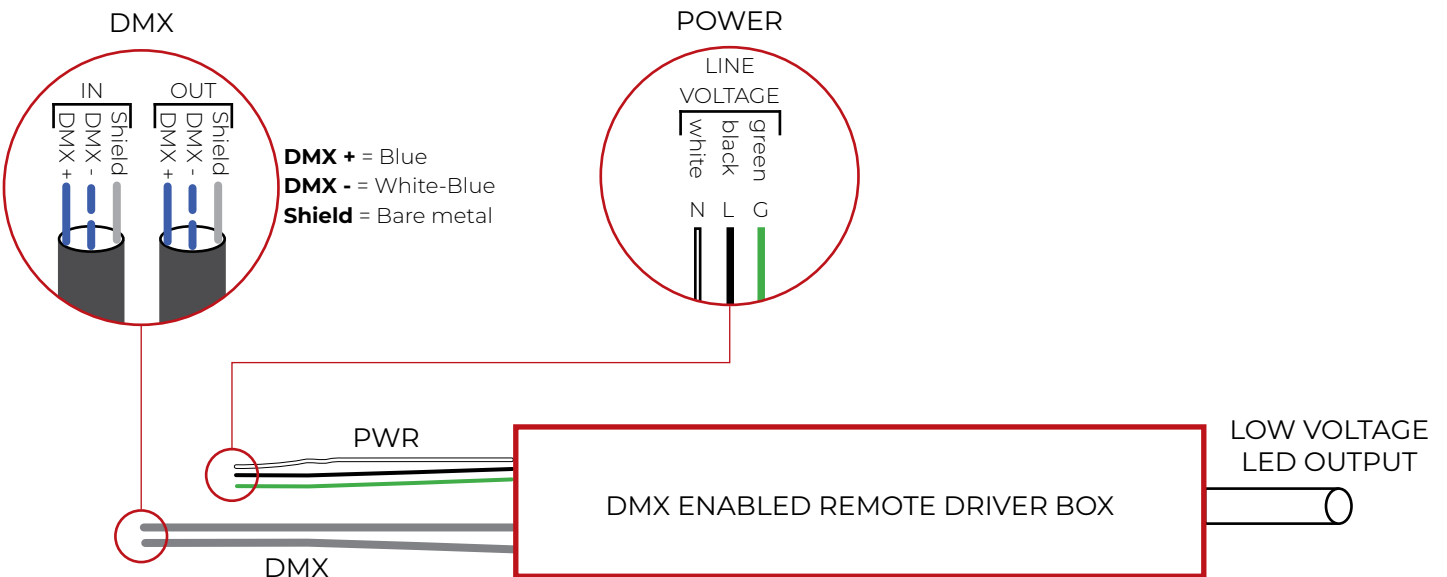

3 LAST DMX CONNECTION DETAIL

