



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

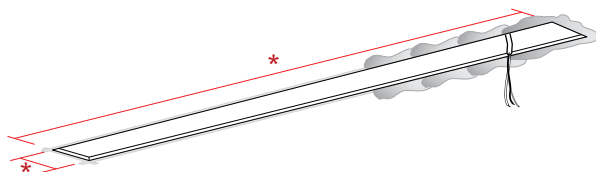


Prepare the area where the fixture is going to be installed. Cut hole in the drywall according to the dimensions [*] in the client drawings.

2

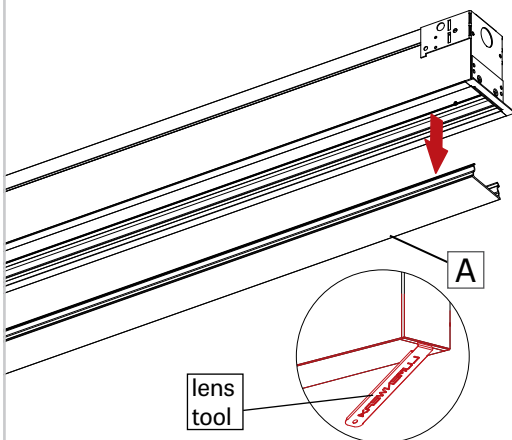


Remove lens (A) with the included lens tool.

3

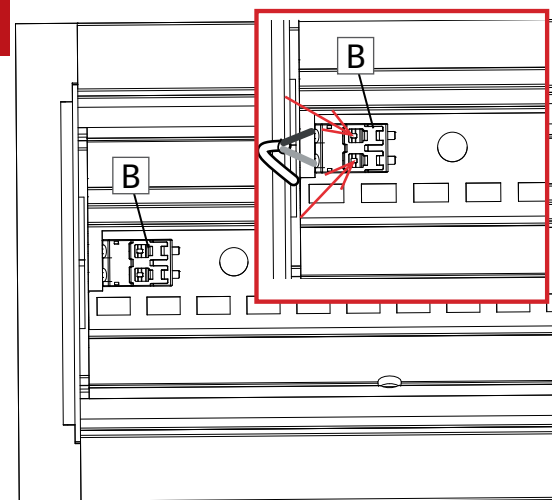


Disconnect LED mox connector (B) by taking a pointed object and pressing on the two tabs on the top.

4

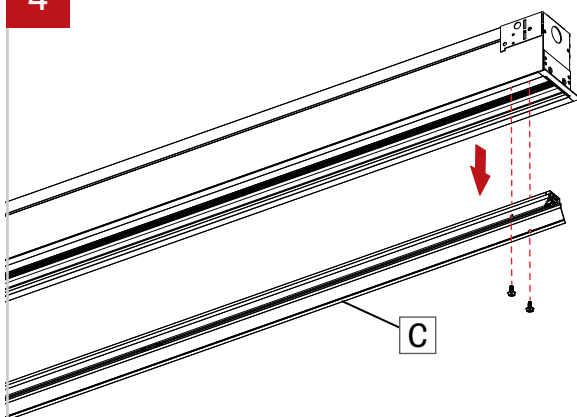


Remove the cartridge (C).

5






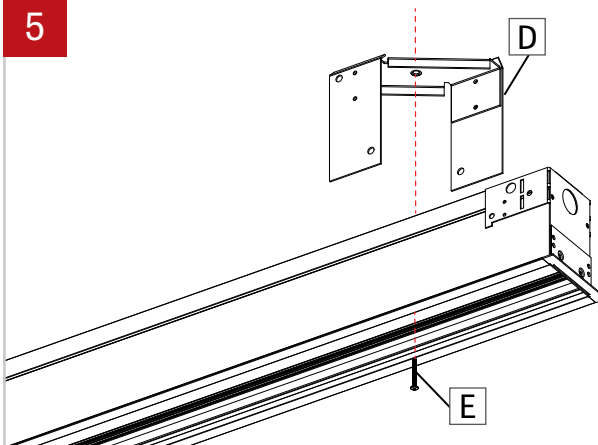


Remove the screws (E) from the drywall brackets (D). Install the drywall brackets (D) on the fixture and secure them by putting back in place the screws (E). Make sure that the screws are not overtighten and that the drywall brackets (D) don't rotate in place.


6

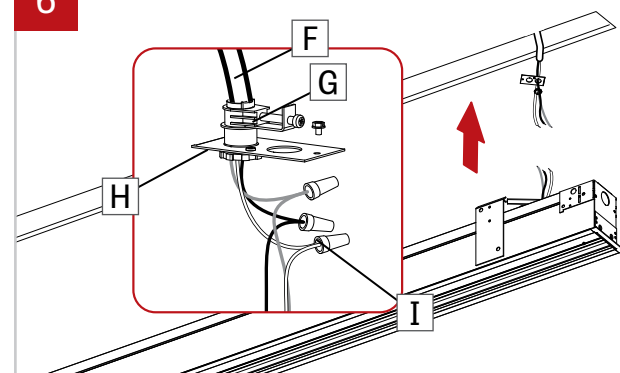

Install power cable (F) (by other) through the BX connector (G) (by other) and install onto the power plate (H) provided. Make electrical connections between power cable (F) and fixture cables using electrical marettes (I). Reinstall the power plate (H) to the fixture. Insert fixture into pre-cut hole in drywall. **Number of wires may vary.**

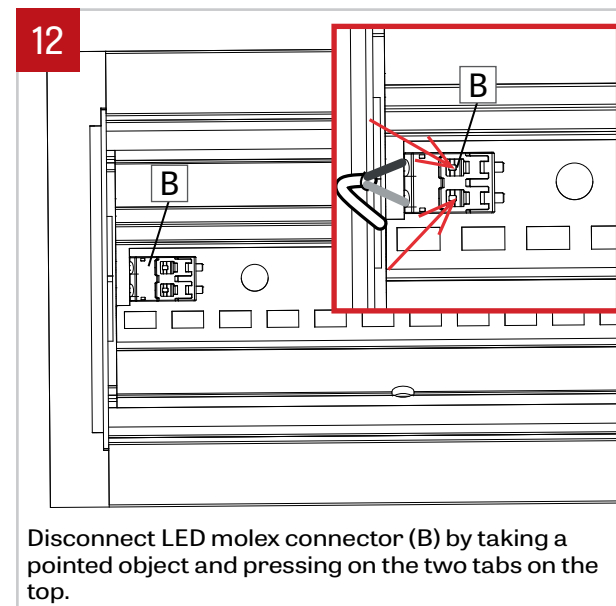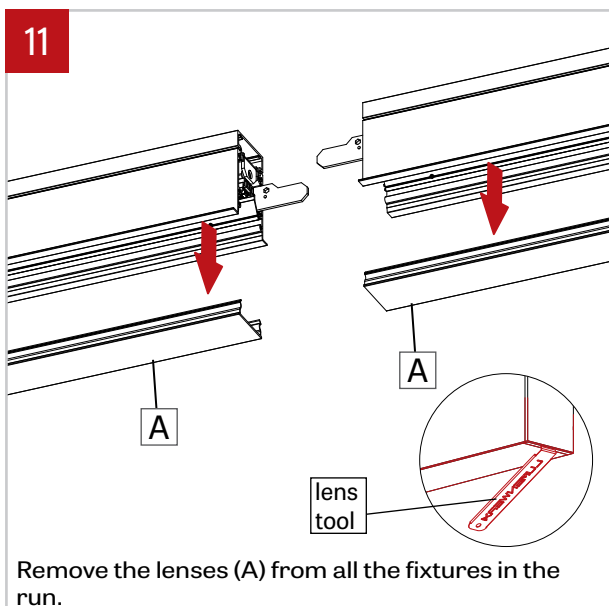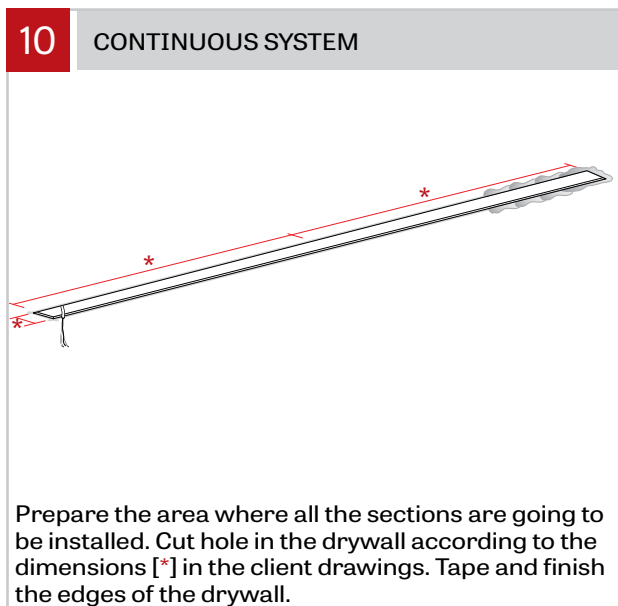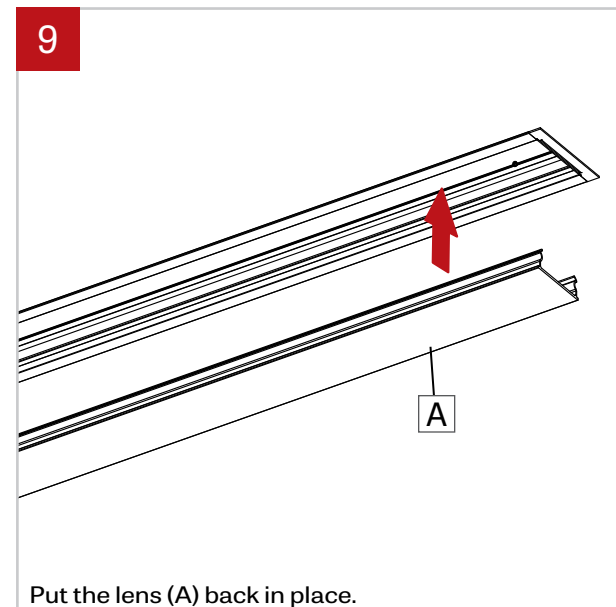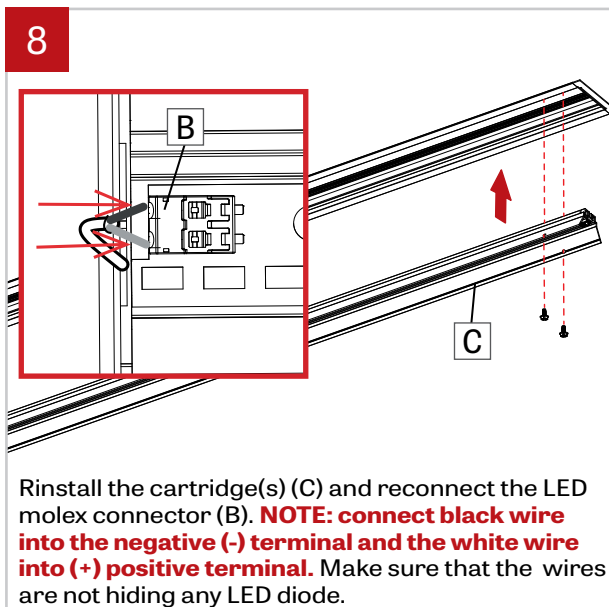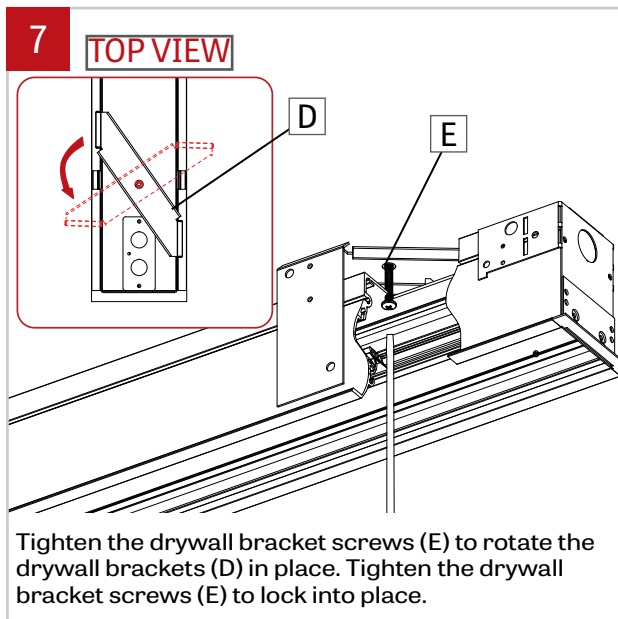


13

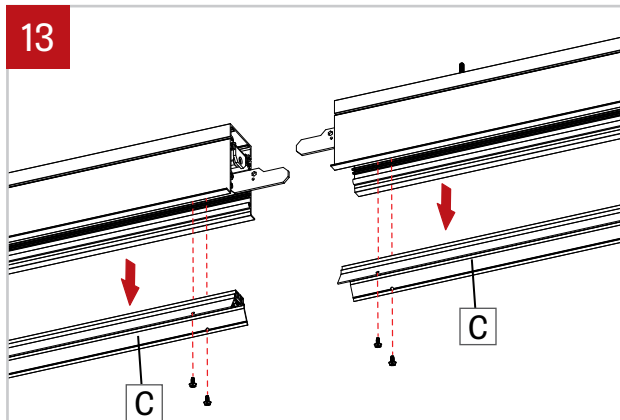


Remove all the end LED cartridges (C).

14

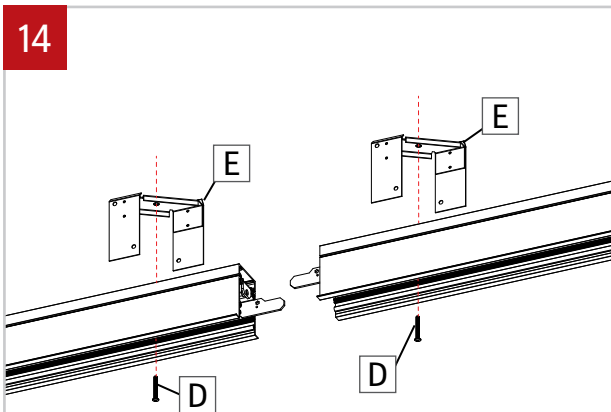


Remove the screw (D) from the drywall bracket (E). Install the drywall brackets (E) on the fixture and secure them by putting back in place the screws (D). Make sure that the screws are not overtighten and that the drywall brackets (D) don't rotate in place.

15

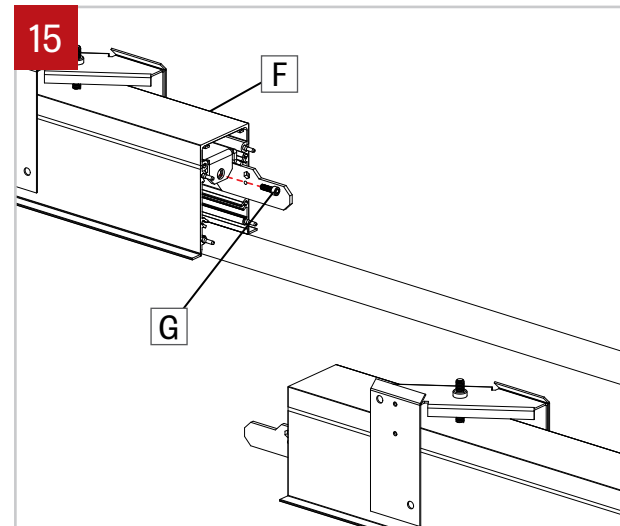


Apply steps 6 and 7 to the first fixture (F) in the run. Remove the screw (G) on the joiner and put it in a safe place.

16

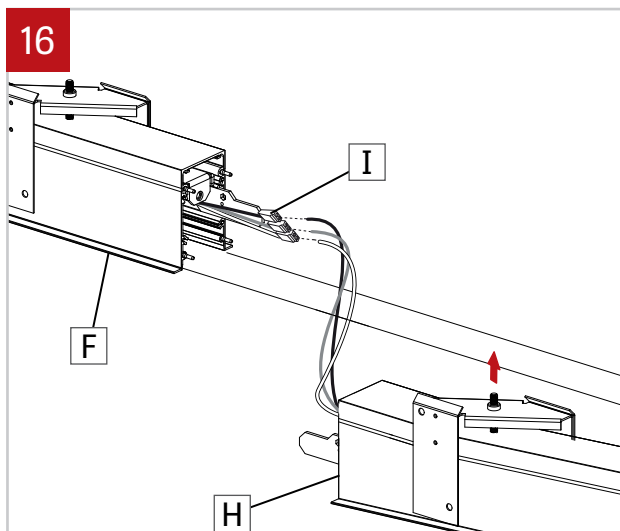


Make the wires connection between fixture (F) and (H) using quick connector (I).

17

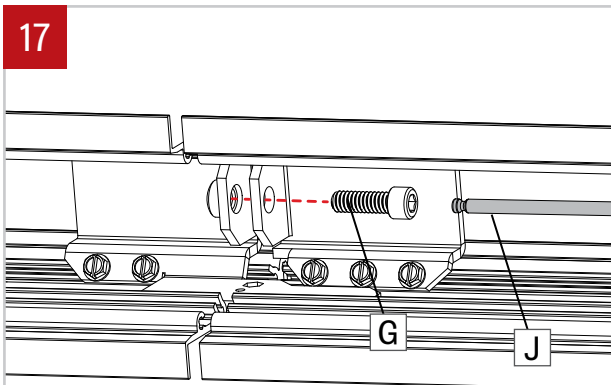

Join fixtures using align pins as guide. Put back in place the provided screw (G) (using 3/16" Ball-End Screwdriver (J) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (G) to pull the extrusions together. Repeat steps 15 to 17 for all others fixtures in the run.

18

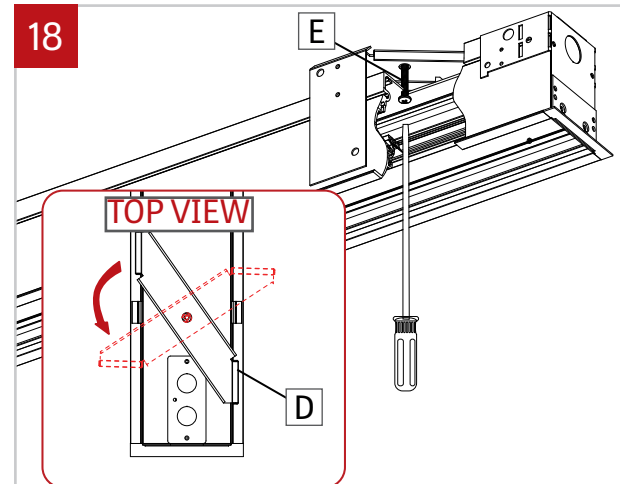

Tighten the drywall bracket screws (E) on the second fixture to rotate the drywall brackets (D) in place. Tighten the drywall bracket screws (E) to lock into place.

