



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

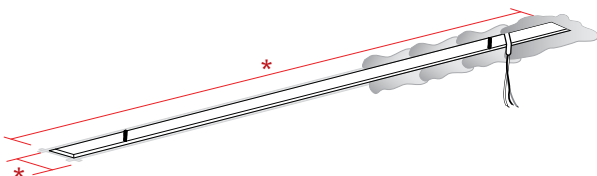


Prepare the area where the fixture is going to be installed. Cut hole in the drywall according to the dimensions [*] in the client drawings.

2

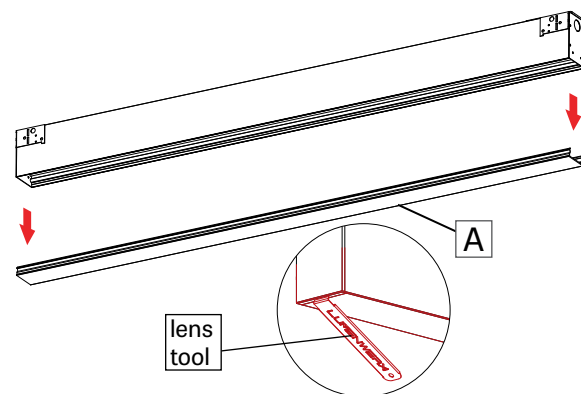


Remove lens (A) with the included lens tool.

3

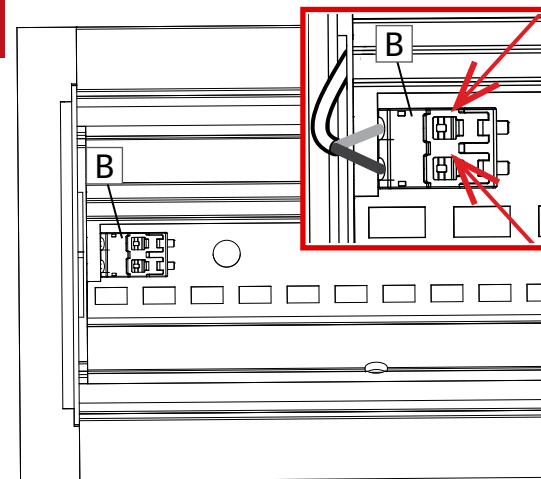


Disconnect LED mox connector (B) by taking a pointed object and pressing on the two tabs on the top.

4

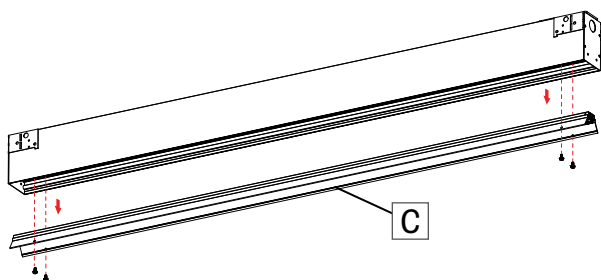


Remove the cartridge (C).

5

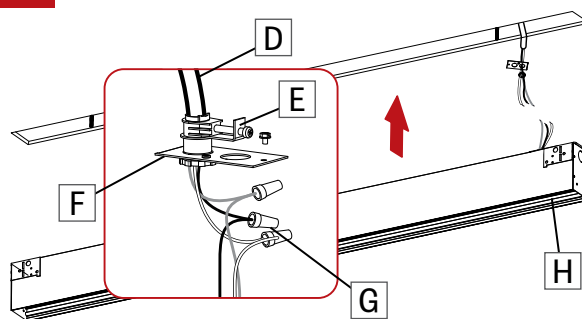


Install power cable (D) (by other) through the BX connector (E) (by other) and install onto the power plate (F) provided. Make electrical connections between power cable (D) and fixture cables using electrical marettes (G). Reinstall the power plate (G) to the fixture (H).

6

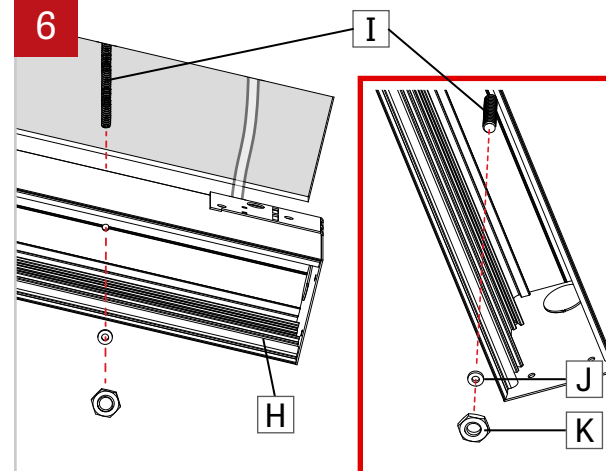


Insert the fixture (H) into pre-cut hole in drywall, aligning threaded rods (I) with holes in top of fixture (H). Put washers (J) and tighten nuts (K) to secure the fixture (H).

7

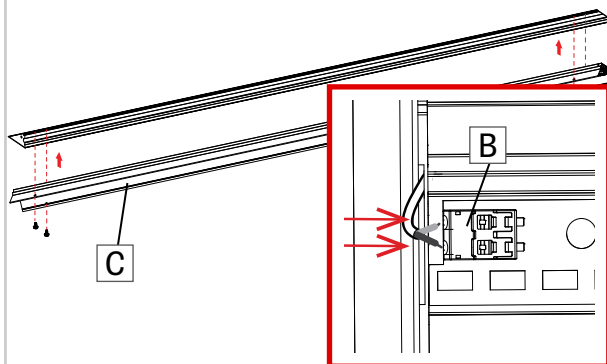

Reinstall the cartridge(s) (C) and reconnect the LED molex connector (B). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place.


8

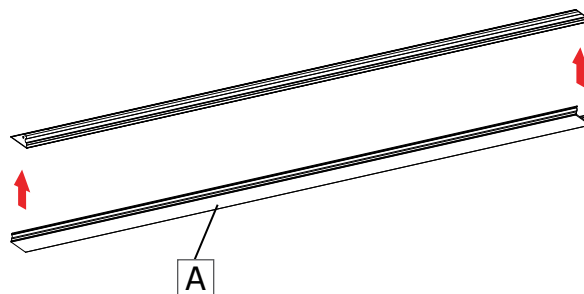

Reinstall the lens (A).


9

CONTINUOUS SYSTEM

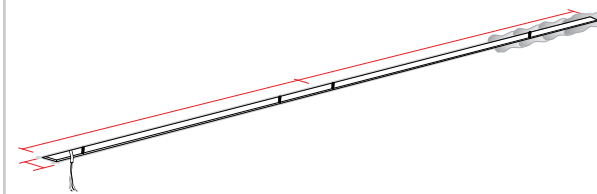


Prepare the area where all the fixtures are going to be installed. Cut hole in the drywall according to the dimensions [*] in the client drawings.

10

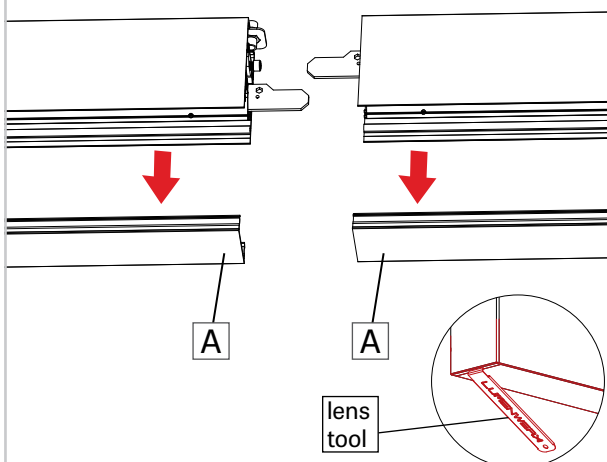


Remove the lenses (A) from all the fixtures in the run, using the lens tool.

11

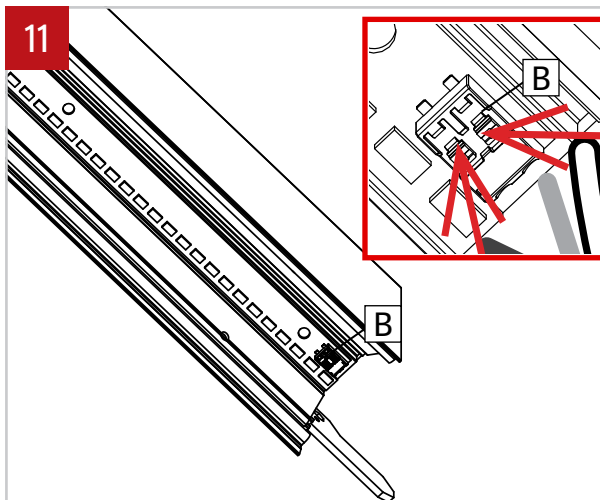

Disconnect LED molex connector (B) by taking a pointed object and pressing on the two tabs on the top.

12

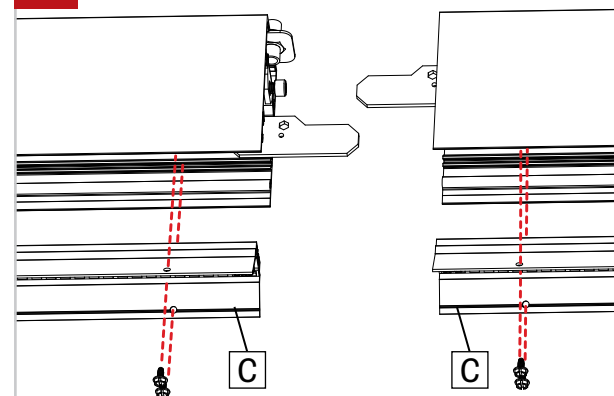

Remove all the end LED cartridges (C).

