



**NOTE:** Wire dimming conductors as Class 1

## 1 SINGLE FIXTURE

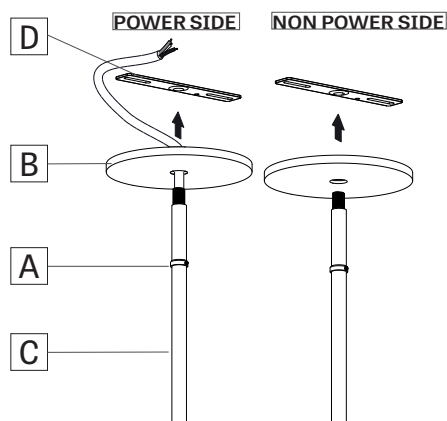


Make sure that the power to the fixture is turned off. Slide the slip ring (A) and the canopy (B) onto the stem (C) and leave some space. Screw the junction box crossbar (D) onto the stem (C).

## 2 FOR EMERGENCY CIRCUIT

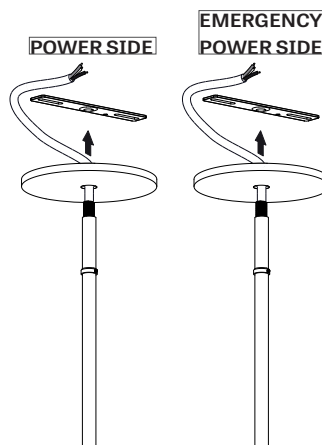


In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

## 3 FOR FIXTURE IN GRID CEILING

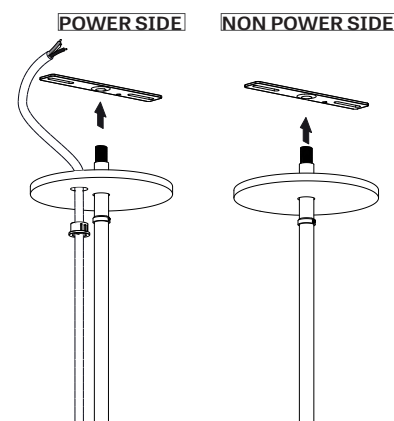


In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.

## 4

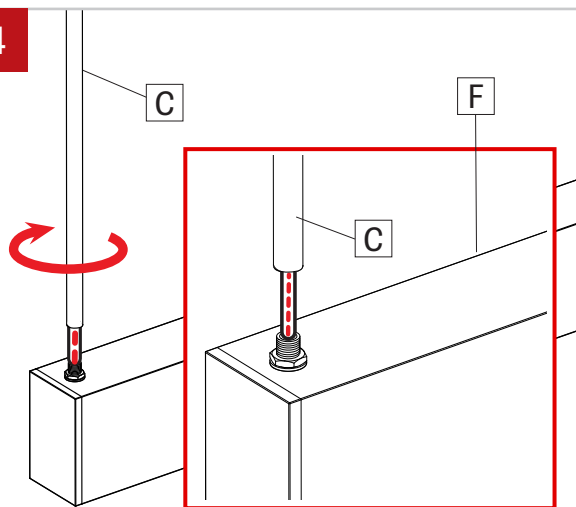


Screw the stems (C) onto the nipple at the ends of the fixture (F).

## 5 POWER SIDE

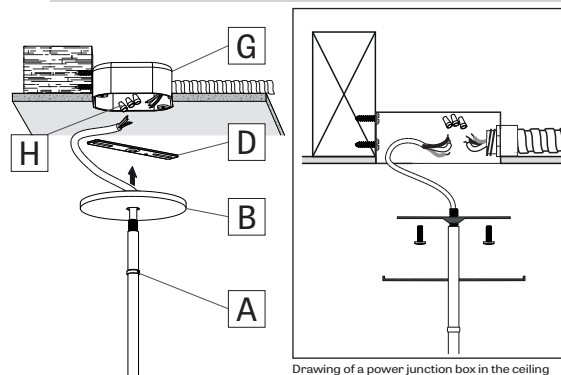


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Make wire connection with wire connectors (H). Then slide the canopy (B) and tighten the set up with the slip ring (A). **Number of wires may vary.**

## 6 NON-POWER SIDE

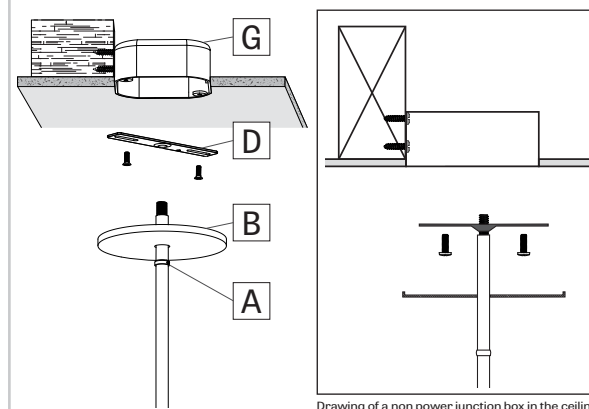


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Then slide the canopy (B) and tighten the set up with the slip ring (A).

### 7 CONTINUOUS SYSTEM

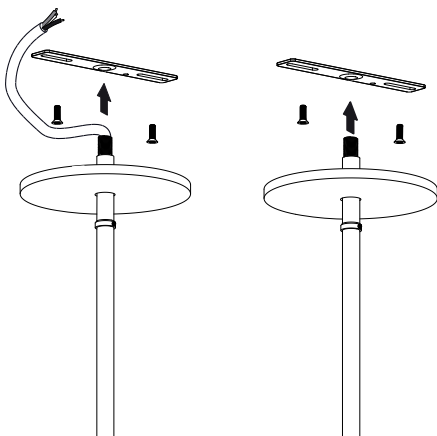


For a continuous system, repeat steps 1 to 3 for all mounting hardware.

### 8

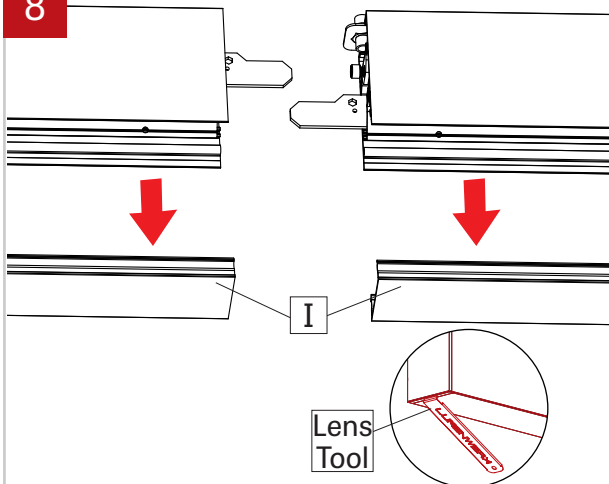


Remove the lenses (I) from all the fixtures in the run. If direct/indirect or indirect, also remove the top lens.

### 9

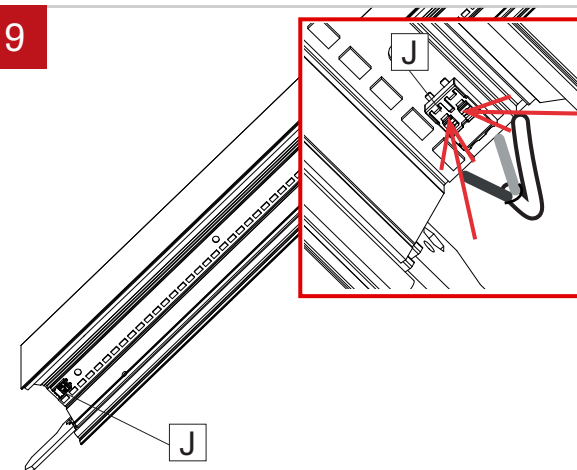


Disconnect LED molex connector (J) by taking a pointed object and pressing on the two tabs on the top.

### 10

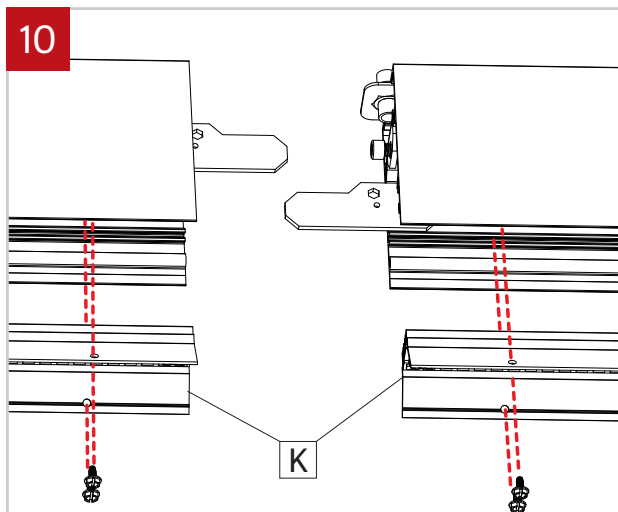


Remove all the end LED cartridges (K). If direct/indirect or indirect, also remove the top cartridge .

### 11

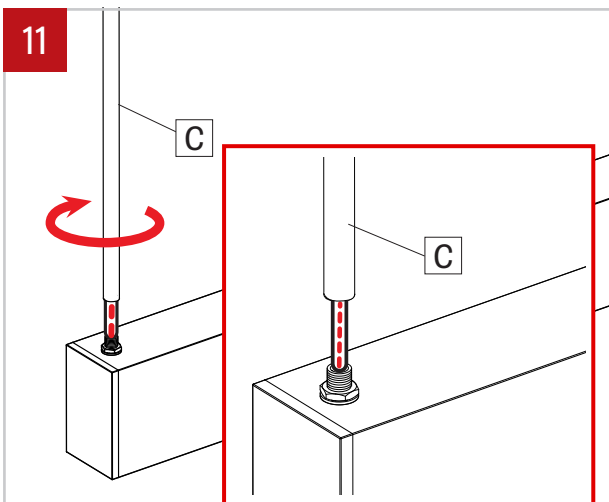


Screw the stems (C) on the first fixture. Then install it on the second fixture.

### 12

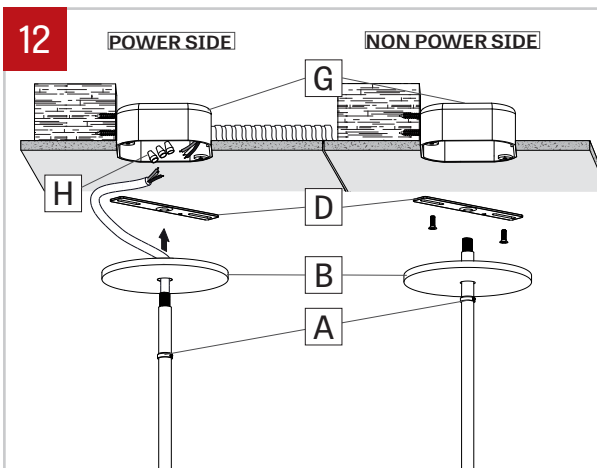


Raise the fixtures and tighten the junction box crossbars (D) with screws (by others) to the junction boxes (G). Make wire connection on the power side with wire connectors (H). Then slide the canopies (B) and thighten the sets up with the slip rings (A).

13

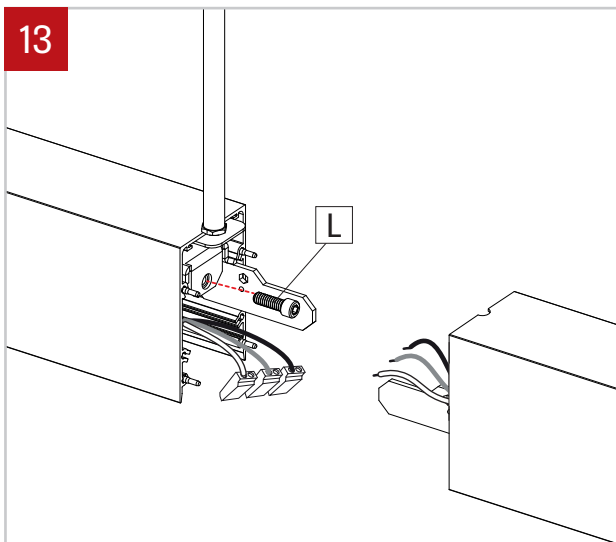


Remove the screw (L) on the joiner and put it in a safe place.

14

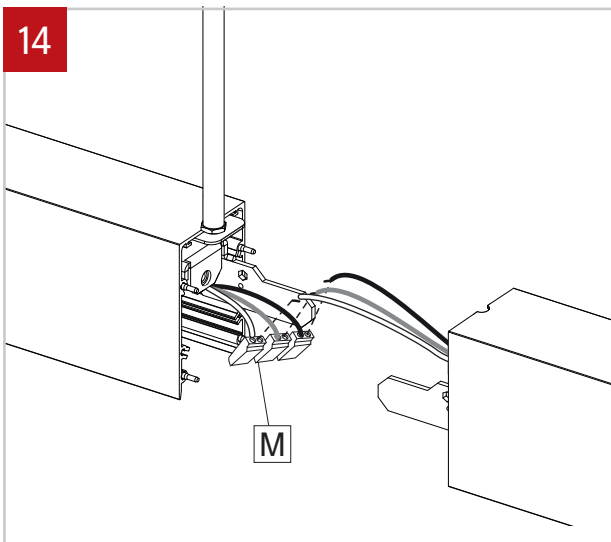

Connect wires between joining fixture using quick connectors (M). **Numbers of wires may vary**


15

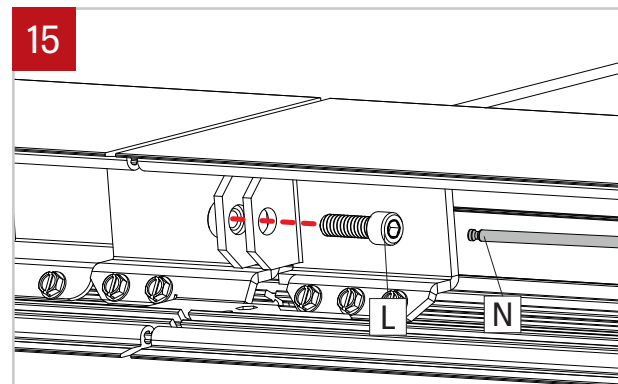

Join fixtures using align pins as guide. Put back in place the provided screw (L) (using 3/16" Ball-End Screwdriver (N) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (L) to pull the extrusions together. Repeat steps 11 to 13 for all others fixtures in the run.


16

DIRECT/INDIRECT

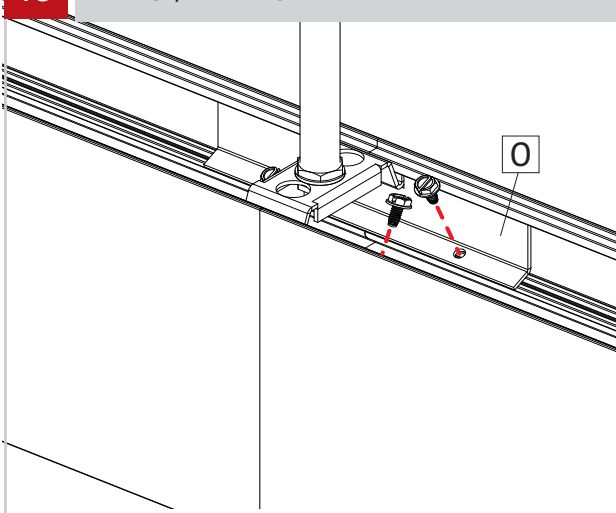


Secure the top joiner (O) with screws. Repeat on both sides.

17

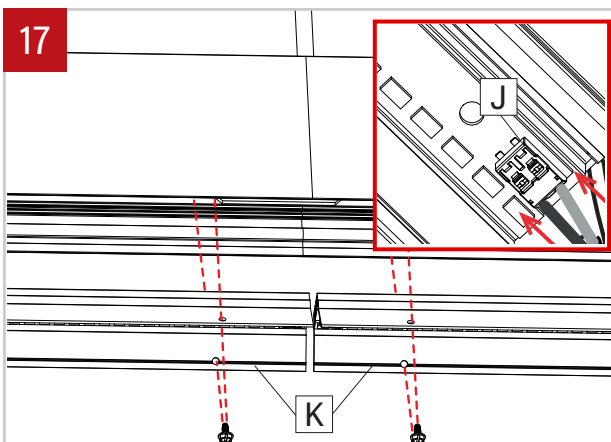

Reinstall the cartridge (K) and reconnect the LED molex connector (J). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place.

18

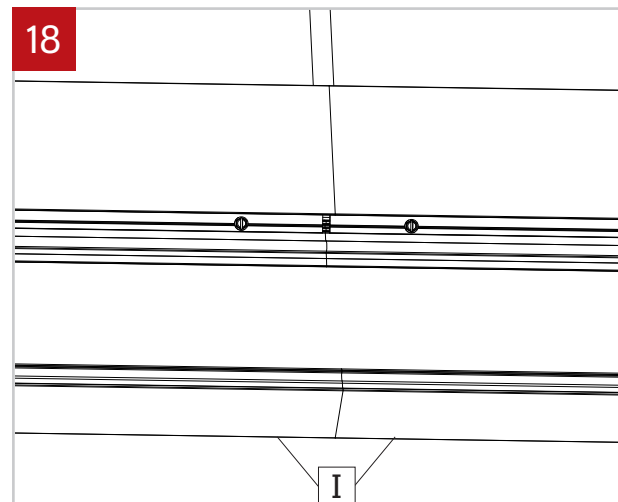

Put the lenses (I) back in place.