

**IMPORTANT:** Installation INST. are shown with direct and applies to indirect & direct/indirect


**NOTE:** Wire dimming conductors as Class 1



This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. proper grounding is required for safety.


Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. la mise à terre électrique est obligatoire pour la sécurité.

### 1 SINGLE FIXTURE

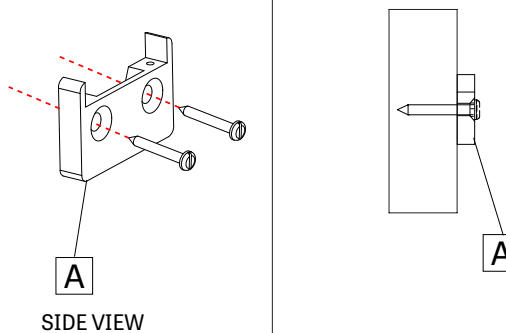


Locate wall bracket position using provided client drawing. Install mounting brackets (A) to wall. Align with structural stud (need double studs – distance between screws is 1.250"). Flat head Philips drive screw, nominal size #10, min. length 1.250".

### 2

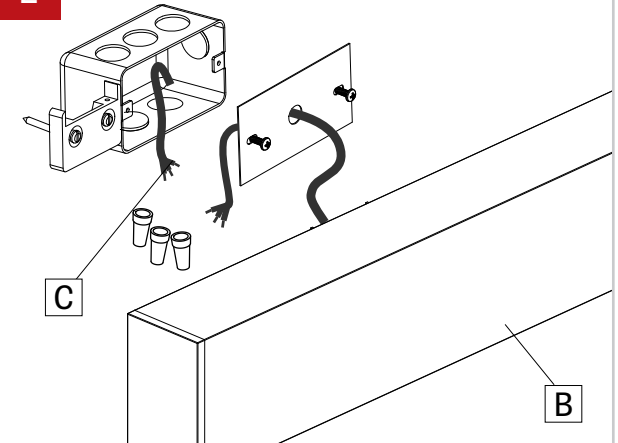

Make wire connection between fixture (B) and wall power cable (C). **Number of wires may vary.**  
**Warning : Power must come from Single branch circuit.**

### 3

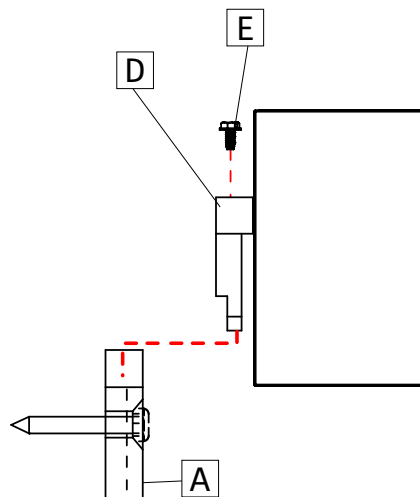


Insert fixture bracket (D) into wall bracket (A), and secure in place with supplied screws (E).

### 4

#### CONTINUOUS SYSTEM


#### HLO

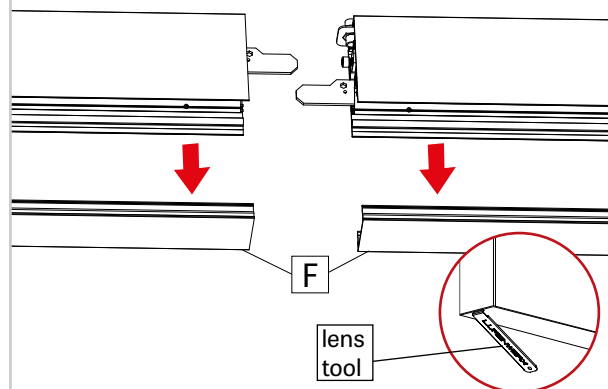

Remove the lenses (F) of all the fixtures in the run with the included lens tool. If direct/indirect or indirect, also remove the top lenses.


### 5

#### HLO

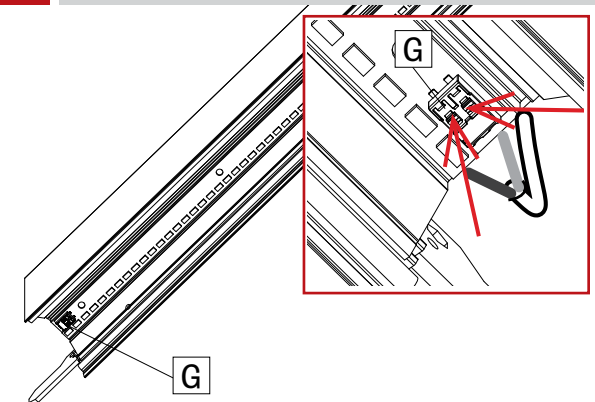


Disconnect LED molex connector (G) by taking a pointed object and pressing on the two tabs on the top.

### 6 HLO

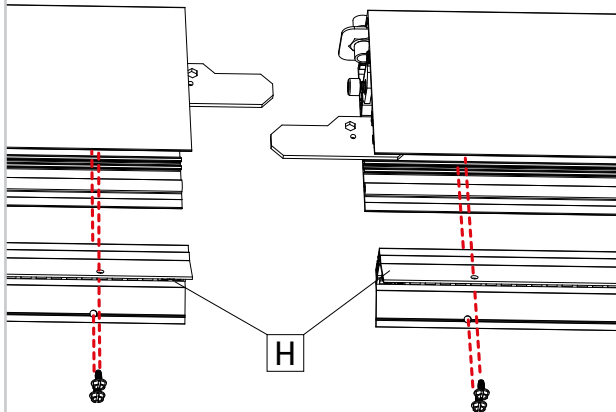


Remove all the end LED cartridges (H). If direct/indirect or indirect, also remove the top cartridge .

### 7 ARO2 & WRO2

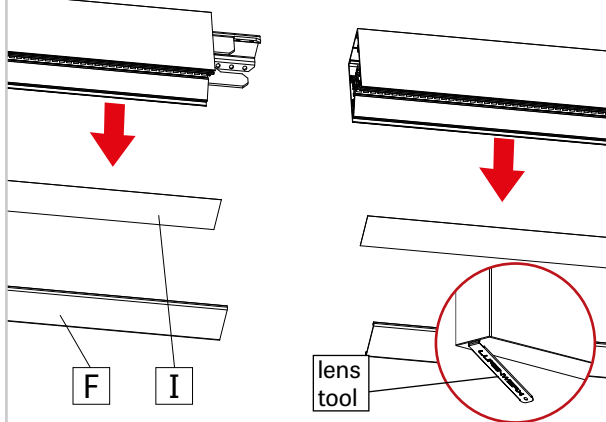


Remove the lens (F) with the included lens tool. Remove the overlay (I). Keep it in a safe place.

### 8 ARO2 & WRO2

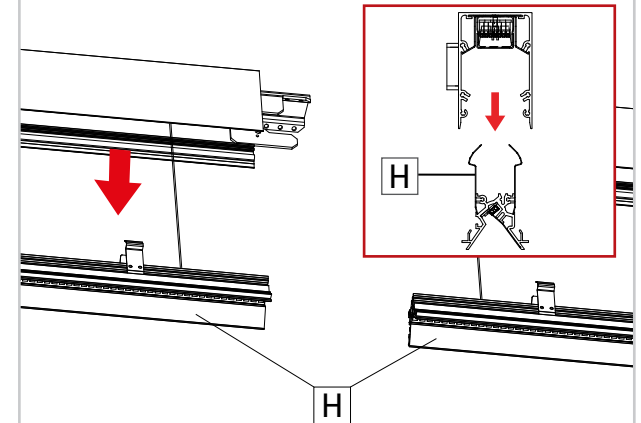


Pull down the cartridges (H).

### 9 ARO2 & WRO2

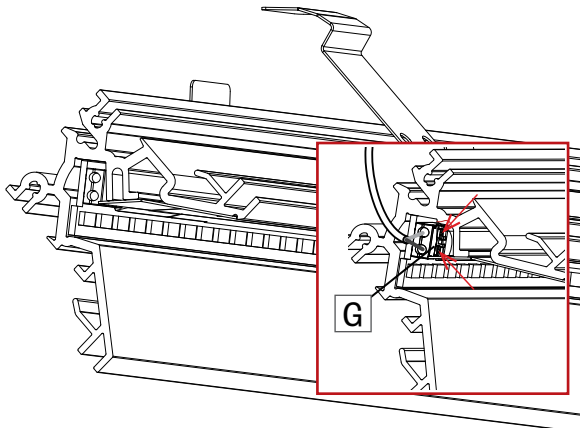


Disconnect LED molex connector (G) by taking a pointed object and pressing on the two tabs on the top.

### 10 ARO2 & WRO2

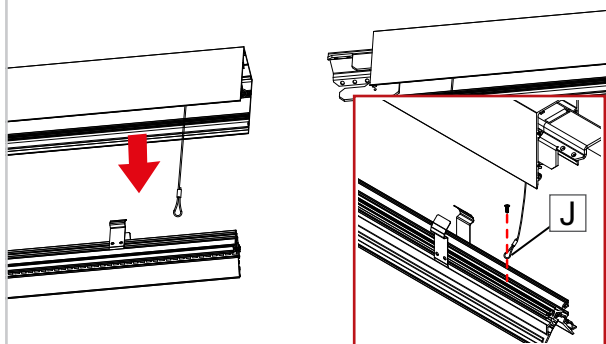

Unscrew the safety cables (J) from the cartridges. Put the cartridges (H) in safe place.


### 11

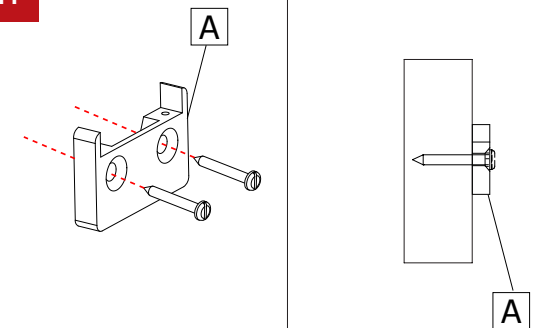

SIDE VIEW


Locate wall bracket position for the second fixture using provided client drawing. Install mounting brackets (A) to wall. Align with structural stud (need double studs – distance between screws is 1.250"). Flat head Philips drive screw, nominal size #10, min. length 1.250".

12

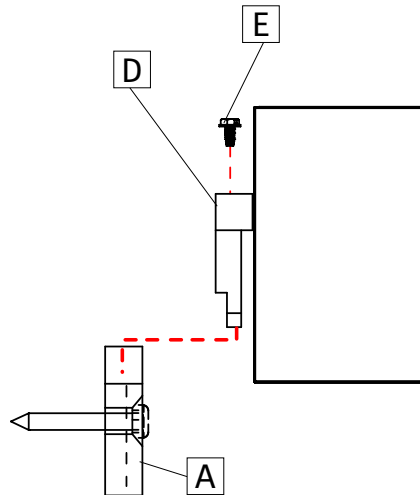


Insert the first fixture bracket (D) into wall bracket (A), and secure in place with supplied screws (E).

13

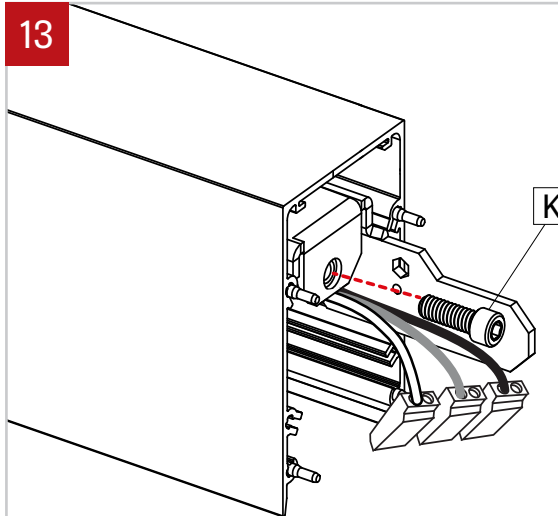


Remove the screw (K) on the joiner and put it in a safe place.

14

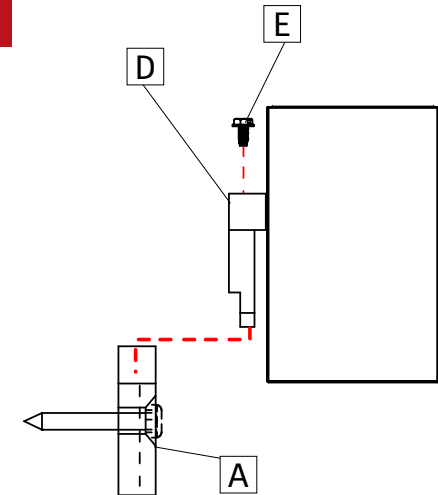


Insert the second fixture bracket (D) into wall bracket (A), and secure in place with supplied screws (E). Do not overtighten.

15

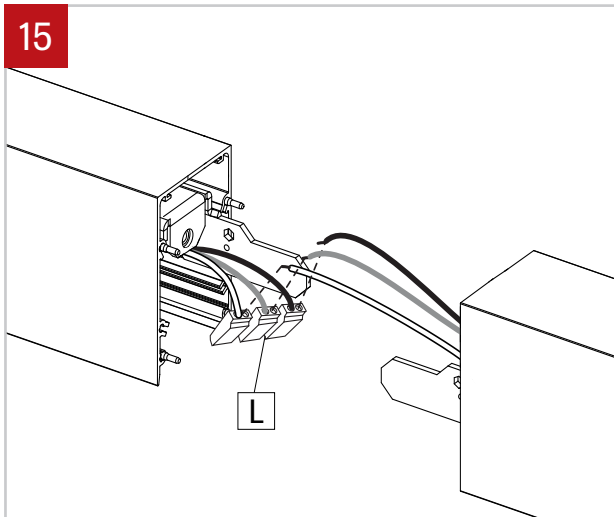

Connect wires between joining fixtures using quick connectors (L). **Number of wires may vary.**


16

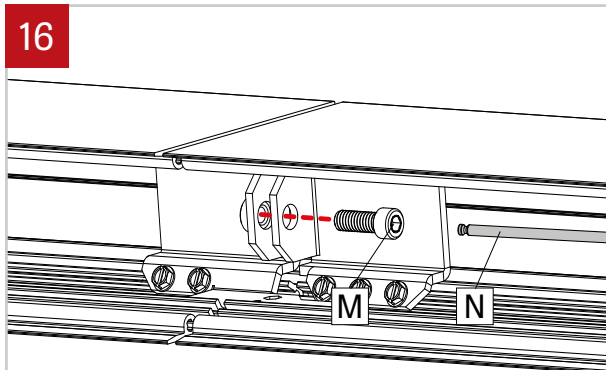

Join fixtures using align pins as guide. Put back in place the provided screw (M) (using 3/16" Ball-End Screwdriver (N) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (M) to pull the extrusions together. Repeat steps 9 to 12 for all other fixture. Then tighten all screws on mounting brackets.


17

DIRECT/INDIRECT

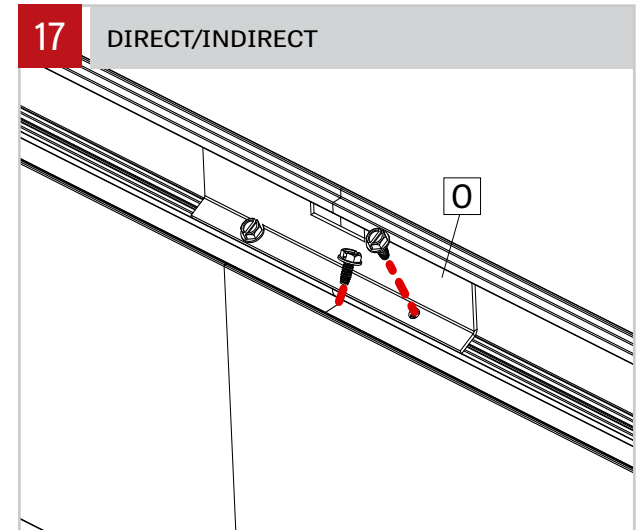


Secure the top joiner (O) with screws. Repeat on both sides.

18 HLO

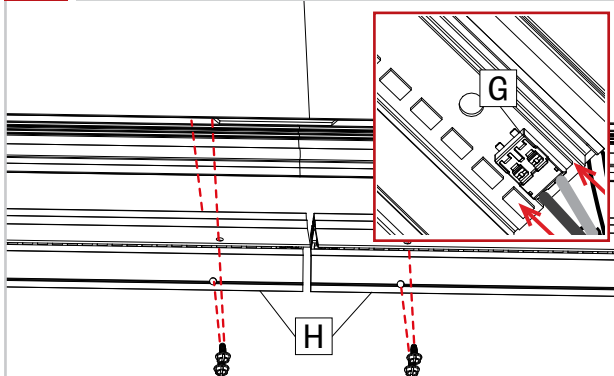


Reinstall the cartridge (H) and reconnect the LED molex connector (G). **NOTE: connect blue wire into the negative (-) terminal and the red wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place.

19 HLO

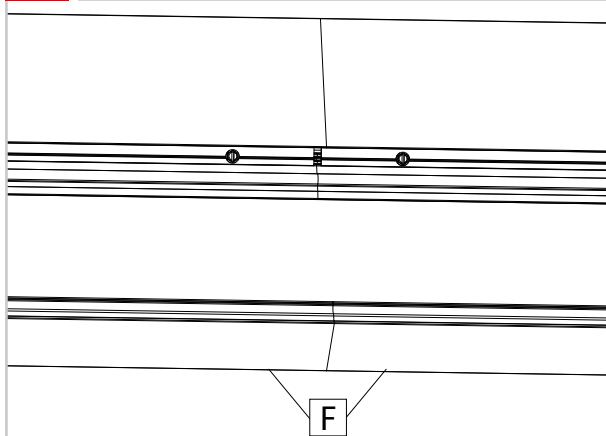


Put the lenses (F) back in place.

20 ARO2 &amp; WRO2

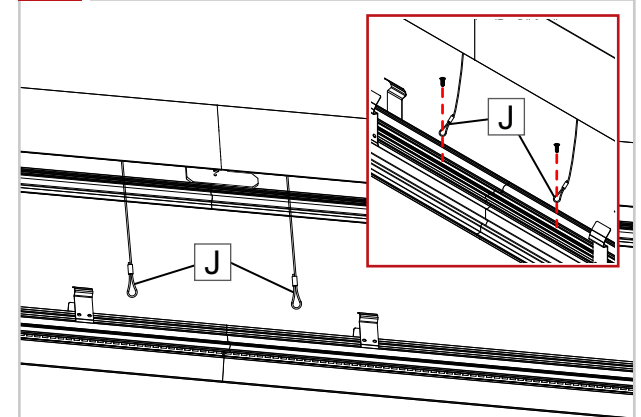


Rescrew the safety cables (J) to the cartridges.

21 ARO2 &amp; WRO2

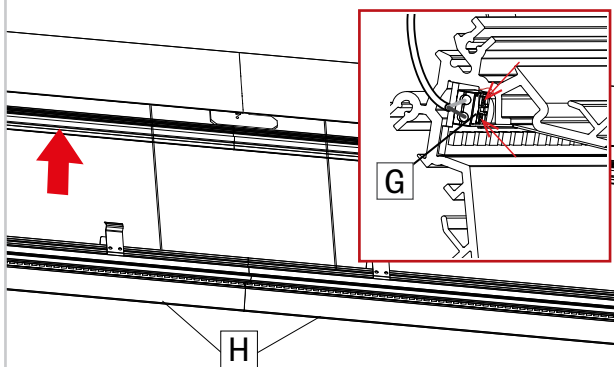

Reconnect the LED molex connector (G). **NOTE: connect the blue wire into the negative (-) terminal and the red wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Reinstall the cartridge (H) back in place.

22 ARO2 &amp; WRO2

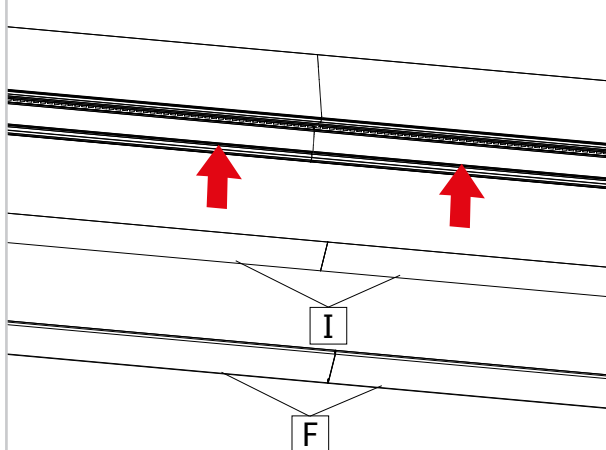

Reinstall the overlay (I) and the lens (F).