CURVIA ACOUSTIX BLANK
Pendant - Multiple Canopies

Lumenwerx

INSTALLATION INSTRUCTIONS

⚠ This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

⚠ Disconnect power before installation or servicing.

⚠ Do not cover the light element lens or heatsink with any materials or adhesive tapes when the fixture is powered.

⚠ Handle the LED cartridge carefully during removal and installation. Tools must not touch the LED chips. Contact may result in damage and LED failure.

⚠ Wire dimming conductors as Class 1.

⚠ A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

⚠ For luminaires specified as recessed, clearance between the sides of the luminaire and parts of the building must be 1/2" minimum; clearance to insulating materials to be 3" minimum, unless luminaire is IC rated.

⚠ For luminaires installed in wet locations, properly seal all mounting and electrical points.

⚠ Warranty claims will not be accepted if incorrect driver or light element is used.

Intertek

 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.


CURVIA ACOUSTIX BLANK
Pendant - Multiple Canopies

Lumenwerx

SINGLE FIXTURE - AIRCRAFT CABLE

1 INSTALL ALL CANOPIES.


Secure the canopy **[A]** with the cable coupler **[B]** on the threaded rod (1/4"-20) **[C]** (by others).

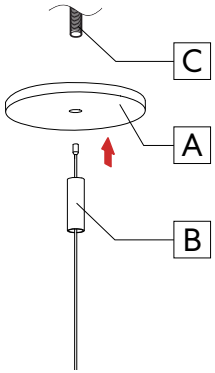


2 INSTALL AIRCRAFT CABLES.

Insert the aircraft cable **[D]** into the griplock **[E]**. Adjust the aircraft cable **[D]** length by pushing the feeder tube.

Cut the excess cable with an aircraft cable cutter **[F]**.

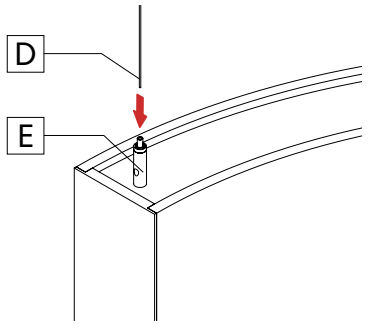




SINGLE FIXTURE - STEM

1 INSTALL ALL CANOPIES.

Locate ceiling mounting points according to the provided client drawings.


Slide the slip ring **[A]** and the canopy **[B]** onto the stem **[C]** and leave some space.

Screw the crossbar **[D]** onto the nipple **[E]**.



2 INSTALL STEMS ON FIXTURE.


Screw the stems **[C]** onto the nipple **[F]** at the ends of the fixture.



3 INSTALL FIXTURE TO CEILING.

Raise the fixture and tighten the crossbar **[D]** with screws (by others) to the junction box **[G]**.

Slide the canopy **[B]** up and tighten the slip ring **[A]** with the screw **[H]**.

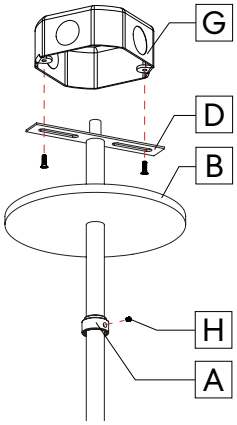

Intertek

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.

CURVIA ACOUSTIX BLANK
Pendant - Multiple Canopies


Lumenwerx

CONTINUOUS RUN - AIRCRAFT CABLE & STEM


1 REMOVE SCREWS.

Remove the felt covers **[A]** from the top of the fixtures.
Unscrew the screws **[B]** and place them in a safe place.

FIXTURE HEIGHT : 3.5"/ 4"

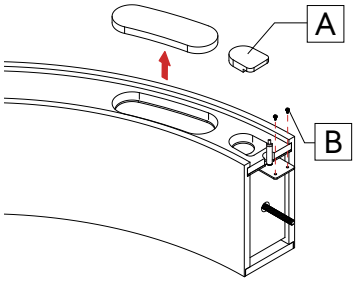

FIXTURE HEIGHT : 8"/ 12"/ 16"

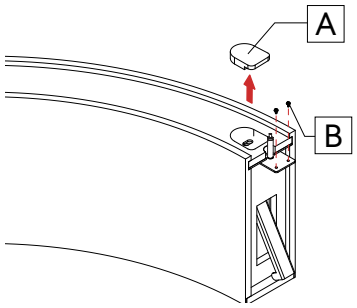

2 FOLLOW ALL STEPS FROM THE SINGLE FIXTURE INSTRUCTIONS FOR ALL THE FIXTURES IN THE RUN.

3 JOIN FIXTURES.

FIXTURE HEIGHT : 3.5"/ 4"


Align the second fixture **[C]** to the first fixture **[D]**. Attach the two fixtures by fastening the screw **[E]** on the joiners using a ball-tip hex screwdriver **[F]**.


FIXTURE HEIGHT : 8"/ 12"/ 16"


Align the second fixture **[G]** to the first fixture **[H]**. Attach the two fixtures by raising the locking arm **[I]** using a hex screwdriver **[J]**.

Note: Repeat this step for all other fixtures.


FIXTURE HEIGHT : 3.5"/ 4"

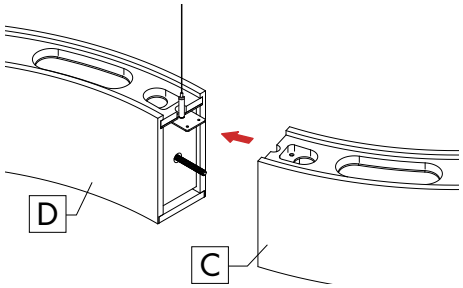


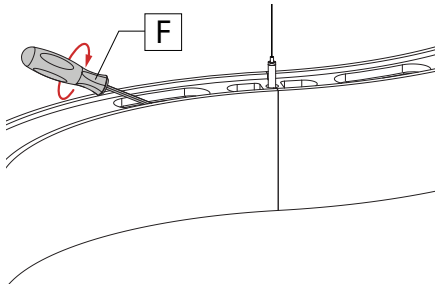




FIXTURE HEIGHT : 8"/ 12"/ 16"

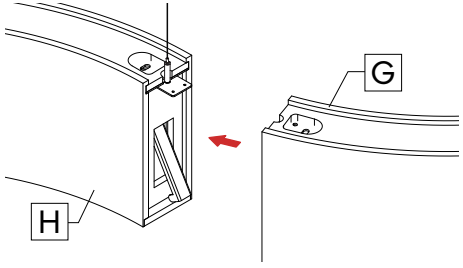

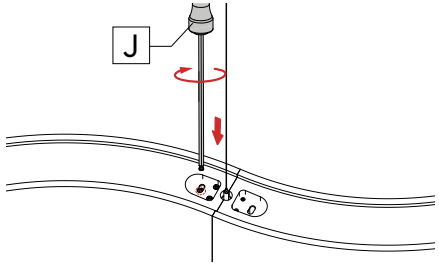



Intertek
www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.


CURVIA ACOUSTIX BLANK
Pendant - Multiple Canopies

CONTINUOUS RUN - AIRCRAFT CABLE & STEM


4 REINSTALL SCREWS.

Reinstall the screws **[B]** securely and put the felt covers **[A]** back to the top of the fixtures.

FIXTURE HEIGHT : 3.5"/ 4"

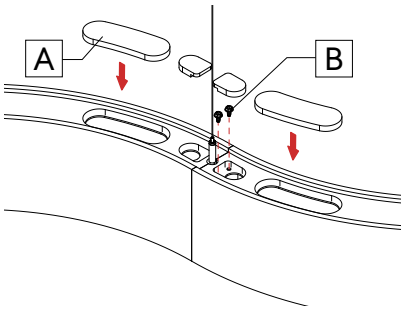

FIXTURE HEIGHT : 8"/ 12"/ 16"

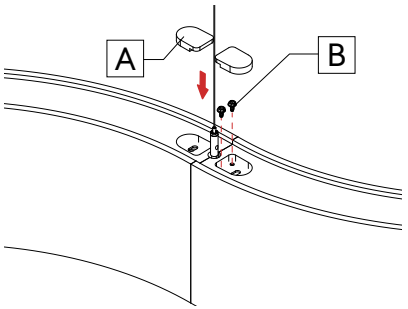

 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.