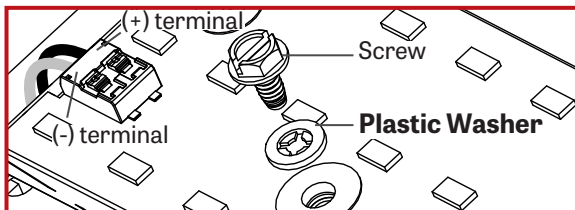
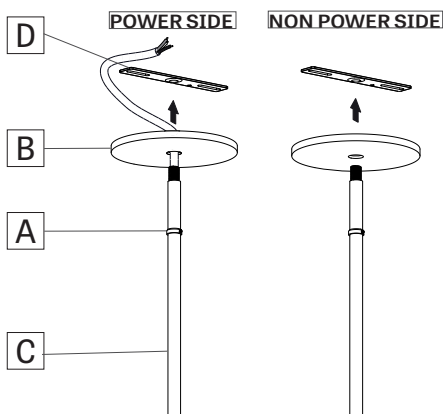


**IMPORTANT:** Installation instructions are shown with Via 4 and applies to Via 3-4-5


**NOTE:** Wire dimming conductors as Class 1


Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure


Make sure to reconnect the wires to the LED boards correctly


**1 SINGLE FIXTURE**


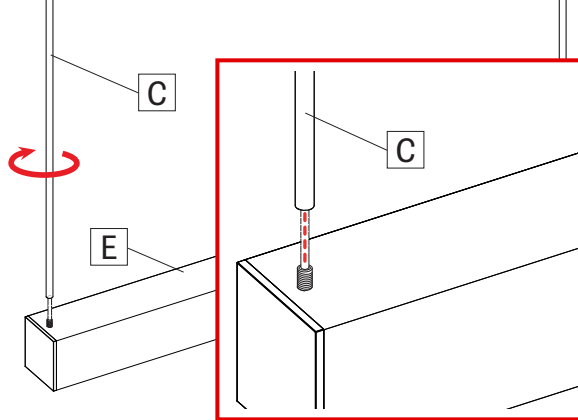
Make sure that the power to the fixture is turned off. Slide the slip ring (A) and the canopy (B) onto the stem (C) and leave some space. Screw the junction box crossbar (D) onto the stem (C).

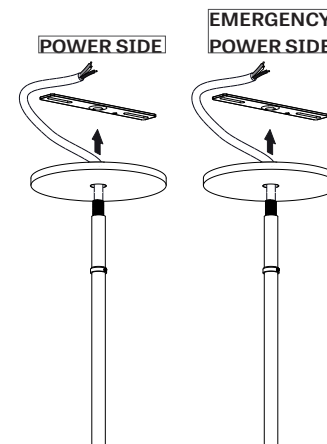**2 FOR EMERGENCY CIRCUIT**


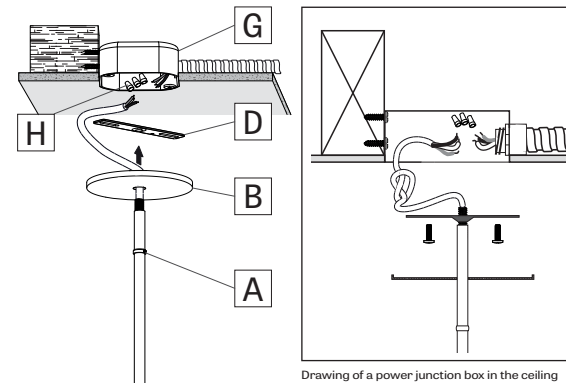
In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

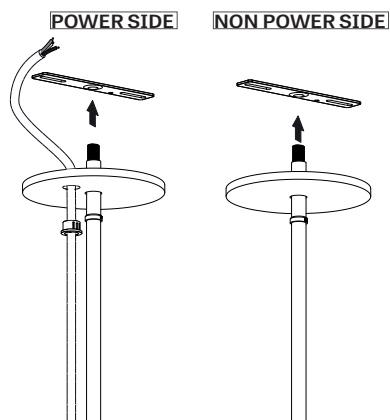**3 FOR FIXTURE IN GRID CEILING**


In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.


**4**


Screw the stems (C) on the first fixture (E). Then install it on the second fixture.

**5 POWER SIDE**


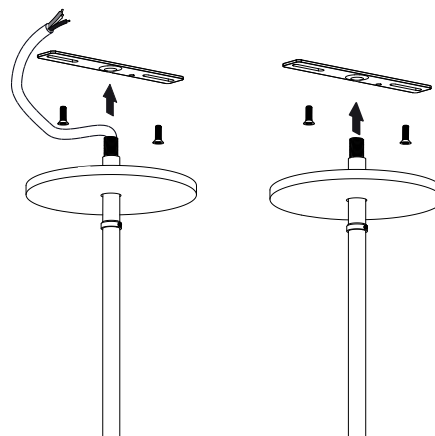
Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Make wire connection with electrical marettes (H). Then slide the canopy (B) and tighten the set up with the slip ring (A).

### 6 NON-POWER SIDE

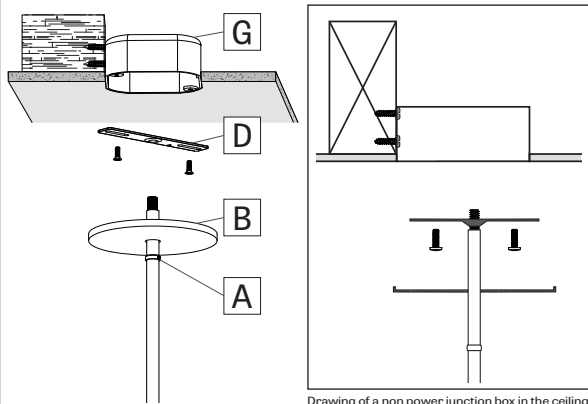


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Then slide the canopy (B) and tighten the set up with the slip ring (A).

### 7 CONTINUOUS SYSTEM




For a continuous system, repeat steps 1 to 3 for all mounting hardware.

### 8

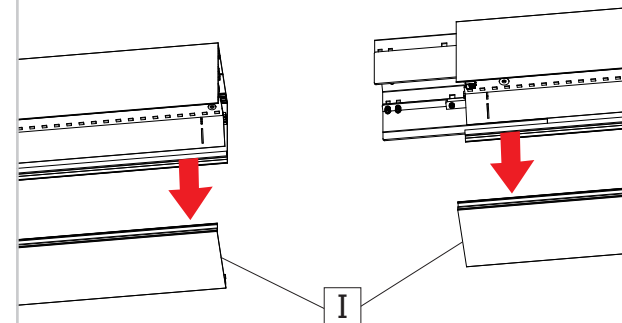


Remove the lens (I) with the included lens tool.

### 9

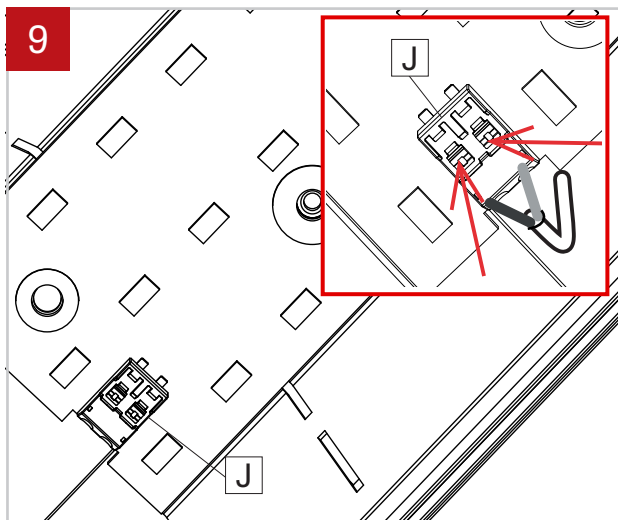


Disconnect LED molex connector (J) by taking a pointed object and pressing on the two tabs on the top.

### 10

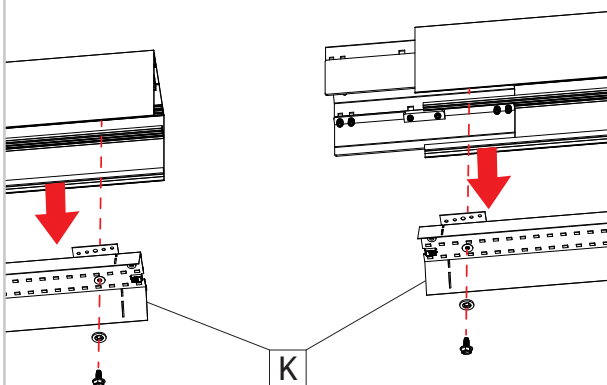


Remove all the end LED cartridges (K).


### 11

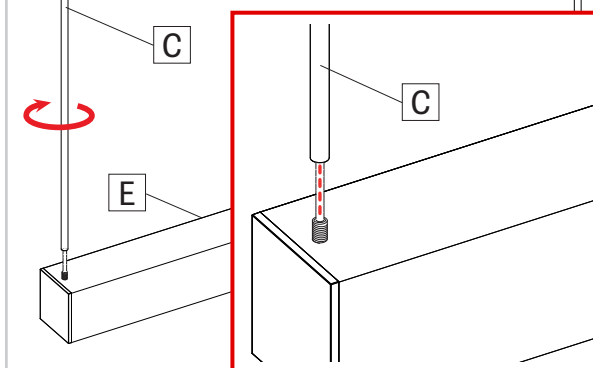


Screw the stems (C) on the first fixture (E). Then install it on the second fixture.

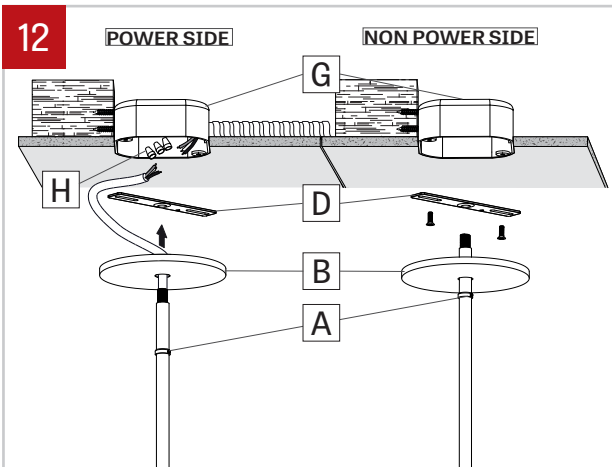


Raise the fixtures and tighten the junction box crossbars (D) with screws (by others) to the junction boxes (G). Make wire connection on the power side with electrical marettes (H). Then slide the canopies (B) and thighten the sets up with the slip rings (A).

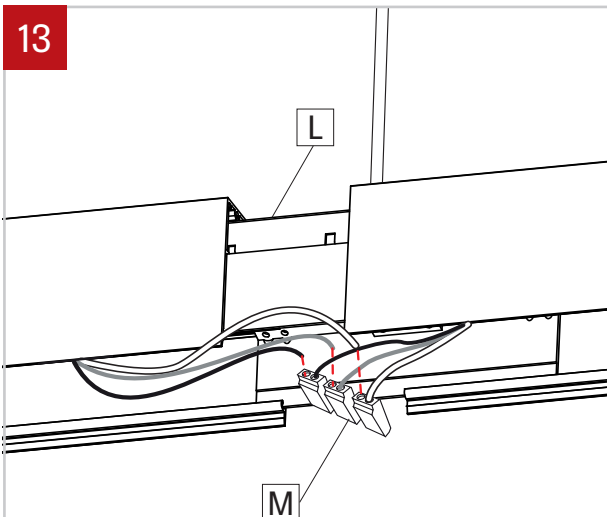


Join fixtures using aligners (L). Connect wires between joining fixtures using quick connectors (M). **Number of wires may vary.**

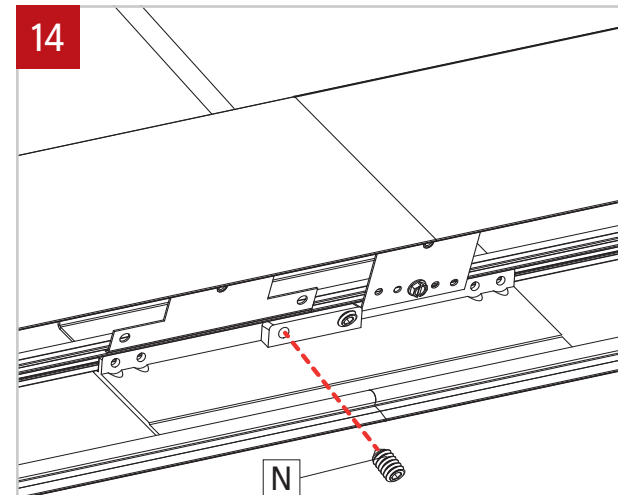

Secure the fixtures with supplied screws (N) (same for direct and direct/indirect fixture). Repeat steps 11 to 13 for all other fixture.

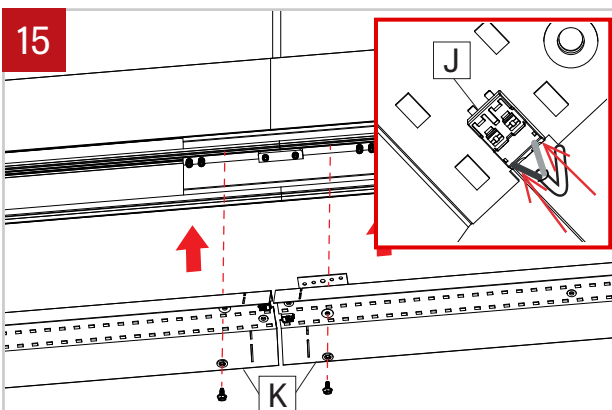

Reinstall the cartridge(s) (K) and reconnect the LED molex connector (J). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place by **using screw with plastic washer. Do not apply too much pressure.**

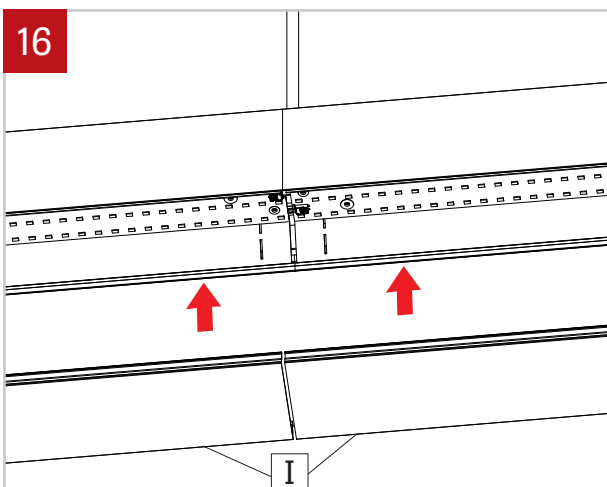

Put the lens (I) back in place.