


VIA WET FLUORESCENT

RECESSED MOUNTING - INSTALLATION


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

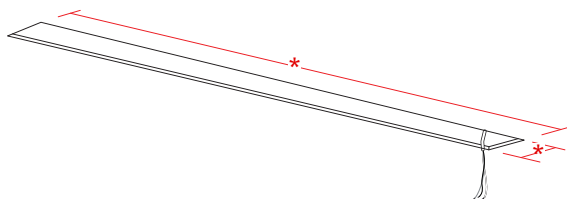


Make sure the power is turned off. Prepare the area and mark the mounting point location where the fixture is going to be installed according to the dimensions [*] in the client drawings.

2

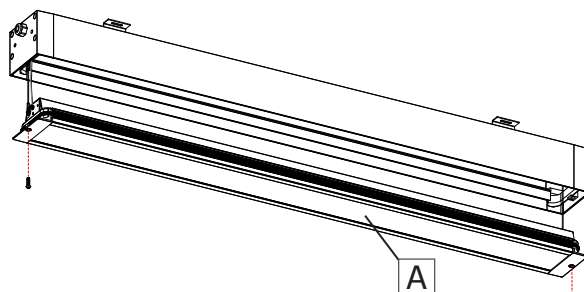


Unscrew and lower the lens frame (A) retained by security cables.

3

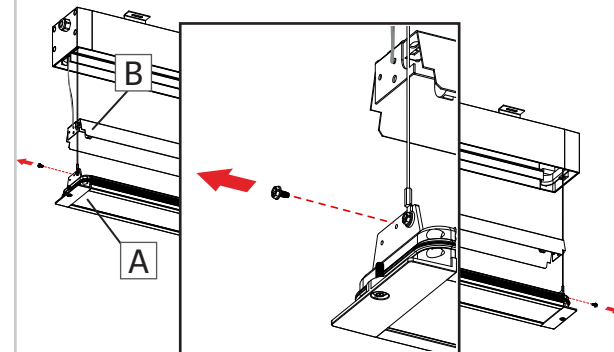


Unscrew the reflector (B) from both side of the lens frame (A) and delicately lift it.

4

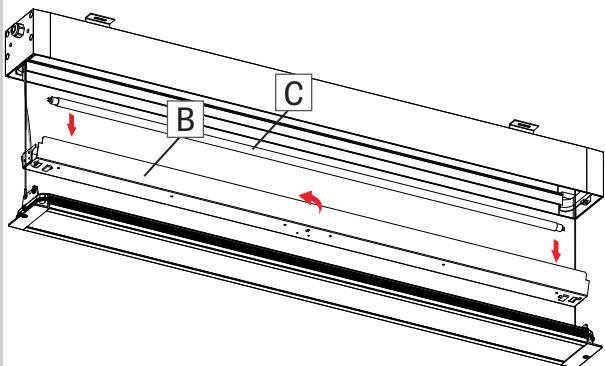


Rotate the reflector (B) and install the lamp (C).

5

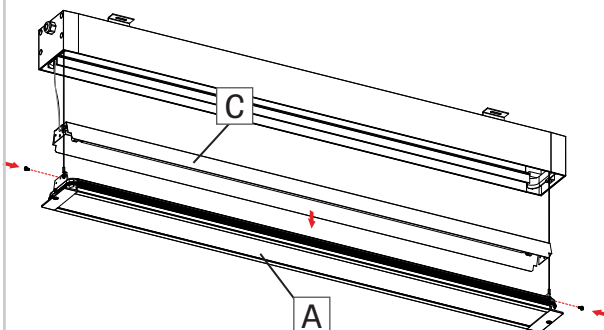

Screw the reflector (C) back on the lens frame (A).


6

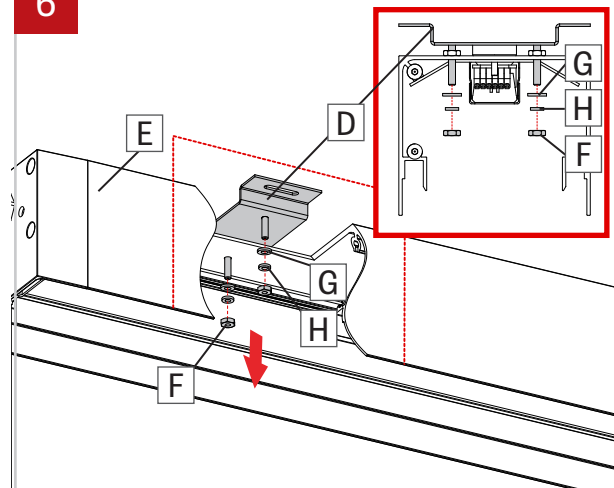


Remove the mounting brackets (D) from the fixture (E) by removing nuts (F), rubber washers (G) and steel washers (H) on the mounting brackets (D) inside the fixture (E).

VIA WET FLUORESCENT


RECESSED MOUNTING - INSTALLATION

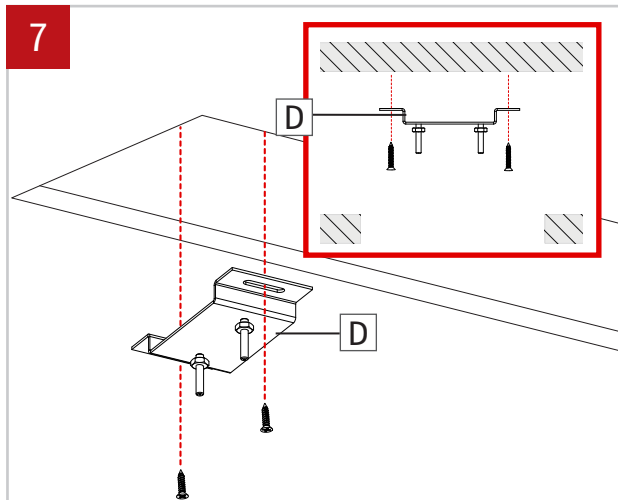


Install the mounting brackets (D) according to the mounting points dimension in the client drawing.

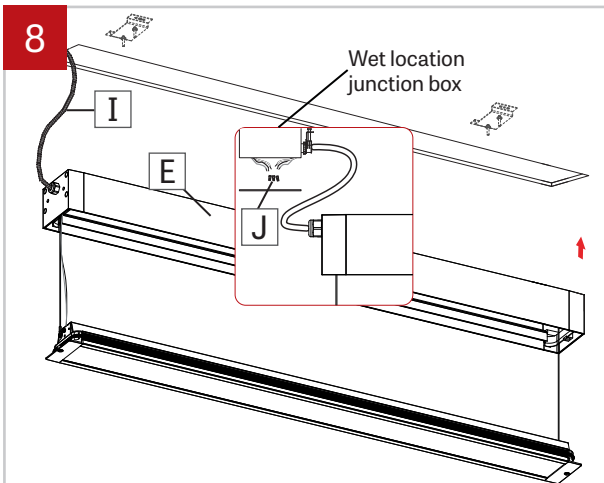


Make electrical connections inside the junction box between power cable (I) and the fixture (E) using electrical marettes (J).

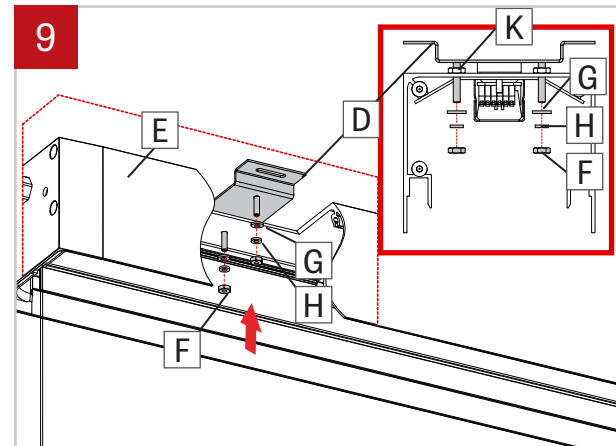


Insert the fixture (E) onto the mounting brackets (D). If the fixture position need adjustments use adjusting nuts (K) on the mounting brackets (D). Put back in place the nuts (F), rubber washers (G) and steel washers (I) to attach the fixture.

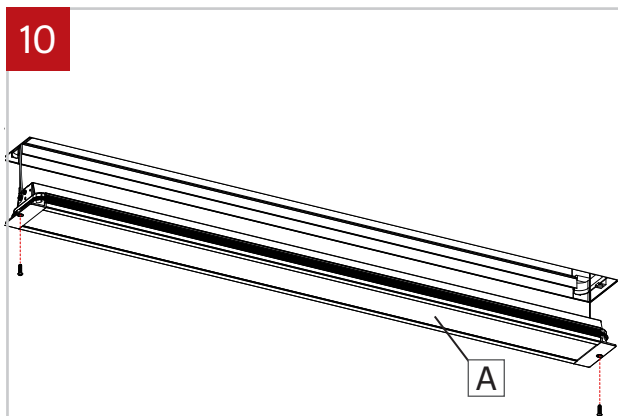

Screw back in place the lens frame (A) making sure not pinching the security cables on the sides.

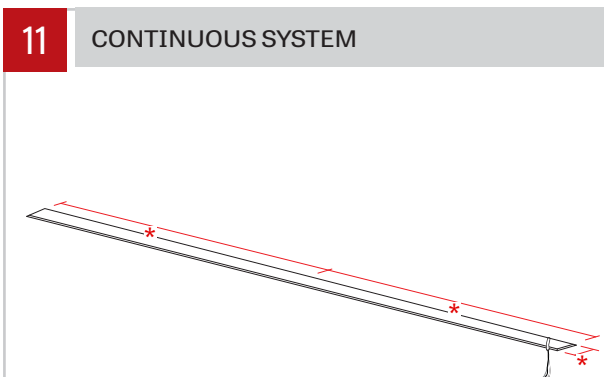


Make sure the power is turned off. Prepare the area and mark the mounting point location where the fixture is going to be installed according to the dimensions [*] in the client drawings.

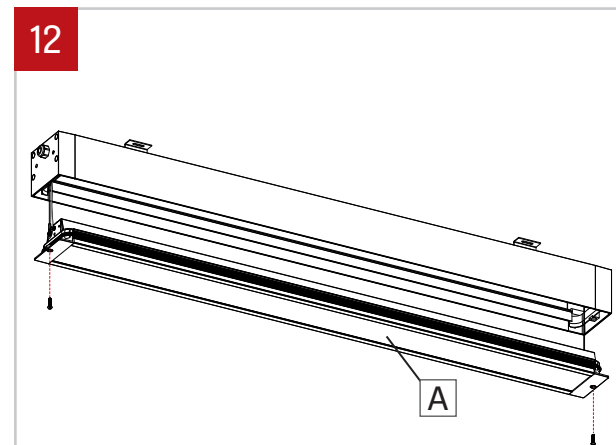


Unscrew and lower the lens frame (A) retained by security cables. Repeat for all fixtures in the run.

13

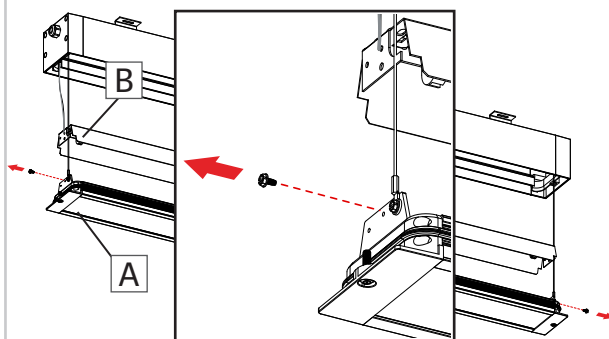


Unscrew the reflector (B) from both side of the lens frame (A) and delicately lift it.

14

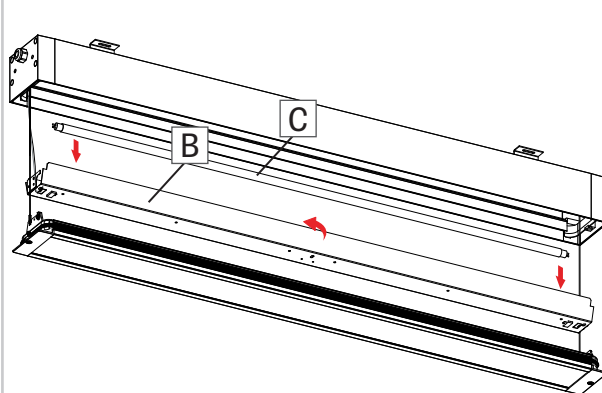


Rotate the reflector (B) and install the lamp (C).

15

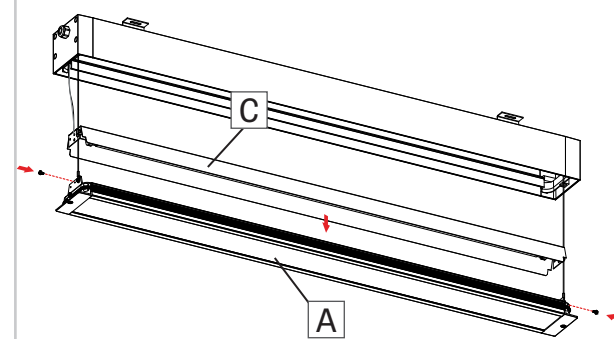


Screw the reflector (C) back on the lens frame (A). Repeat steps 12 to 15 for all fixtures in the run.

16

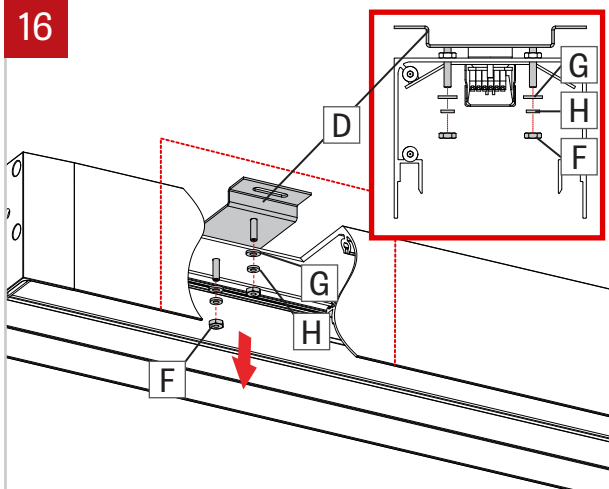


Remove the mounting brackets (D) from the fixtures by removing nuts (F), rubber washers (G) and steel washers (H) on the mounting brackets (D) inside the fixture (E).

17

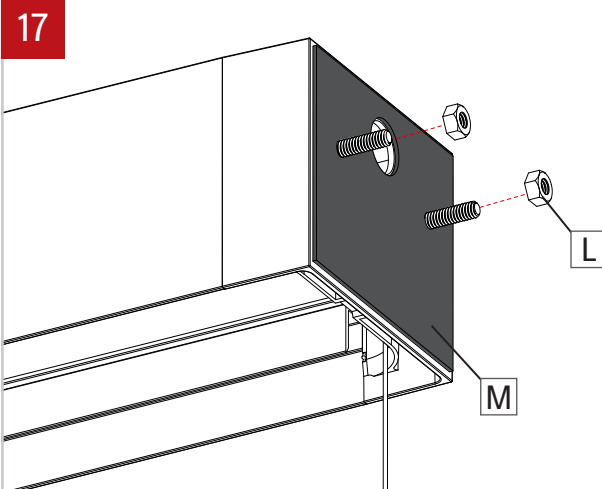

Unscrew and remove nuts (L) on the outside of the joiner (M). Put the nuts (L) in a safe place.


18

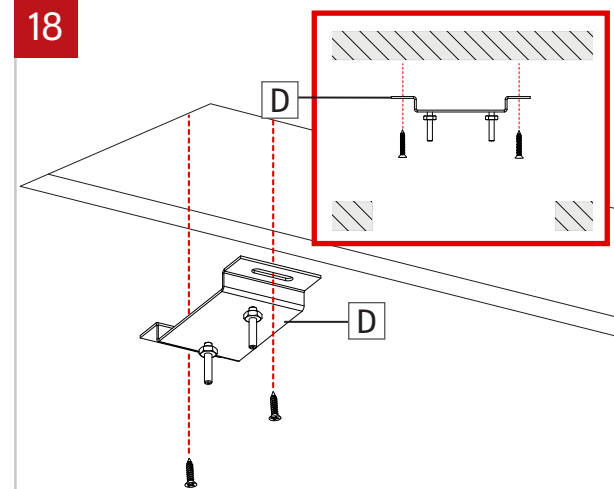


Install the mounting brackets (D) according to the mounting brackets dimension in the client drawing.

VIA WET FLUORESCENT


RECESSED MOUNTING - INSTALLATION

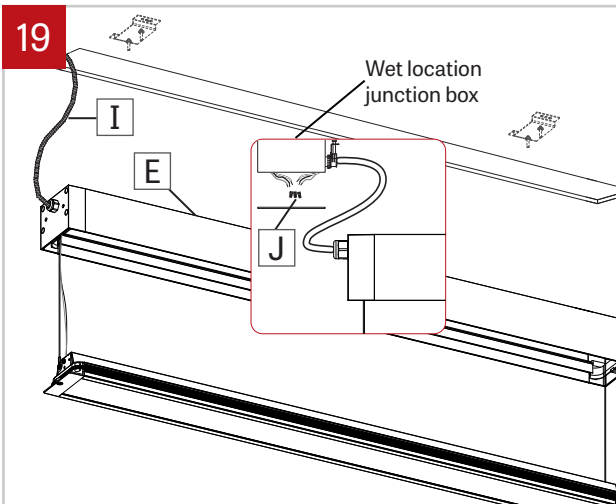


Make electrical connections inside the junction box between power cable (I) and the fixture (E) using electrical marettes (J).

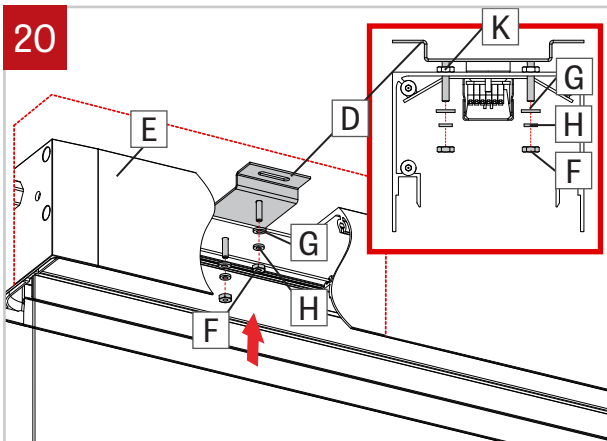


Insert the first fixture (E) into the mounting brackets (D). If the fixture position need adjustments use adjusting nuts (K) on the mounting brackets (D). Put back in place the nuts (F), rubber washers (G) and steel washers (H) to attach the fixture.

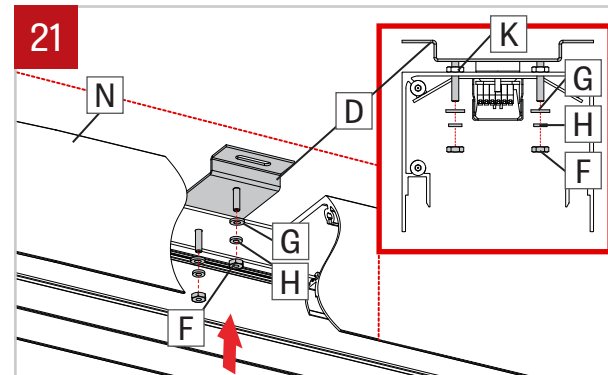


Push the wires of the second fixture inside the first fixture through the end cap hole and insert the second section (N) into pre-cut hole. Insert the second section (N) onto the mounting brackets (D). If the fixture position need adjustments use adjusting nuts (K) on the mounting brackets (D). Put back in place the nuts (F), rubber washers (G) and steel washers (H) to attach the fixture.

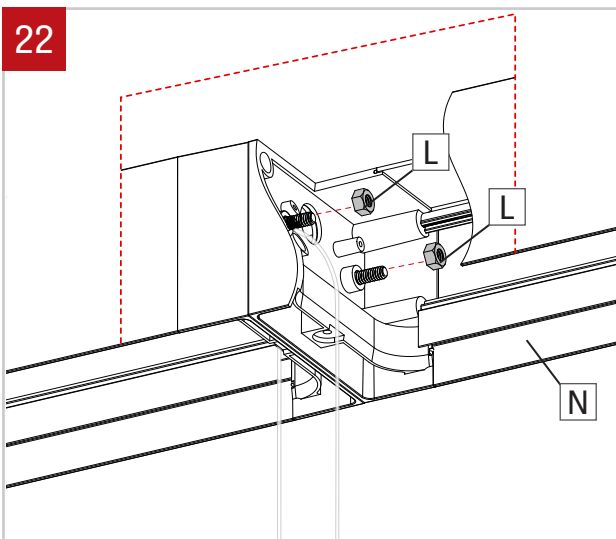

Reinstall the nuts (J) inside the second fixture (N) on the joiner to secure it.

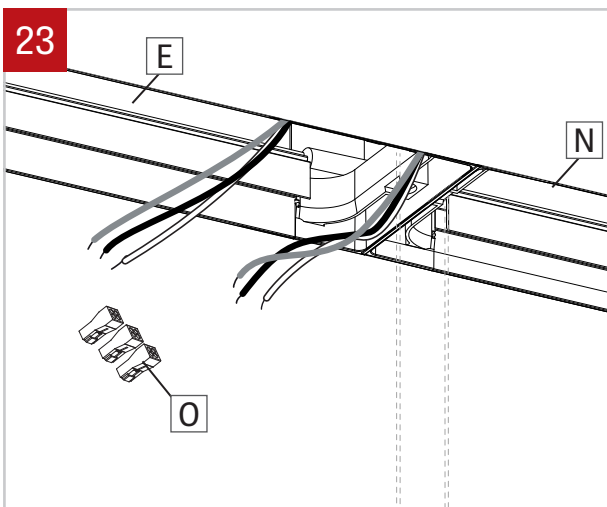

Make the wires connection between (C) and (E) using quick connectors (O).

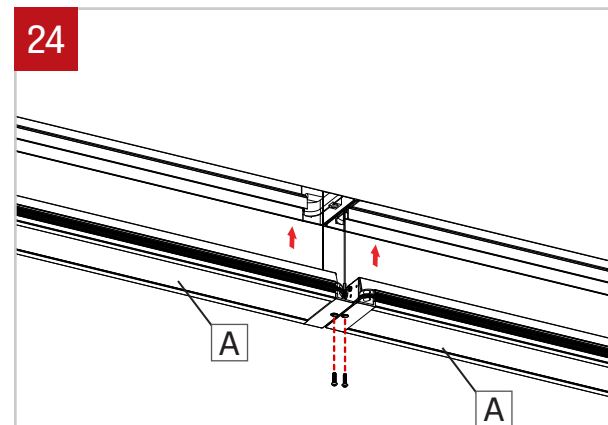

Screw back in place the lens frame (A) making sure not pinching the security cables on the sides.