



**NOTE:** Wire dimming conductors as Class 1

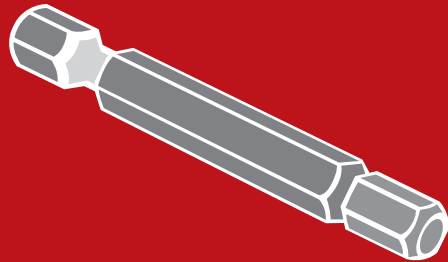


**Tamper-resistan pin-in-hex bit, 5/32"**  
**is REQUIRED to perform the installation.**

### 1 SINGLE FIXTURE

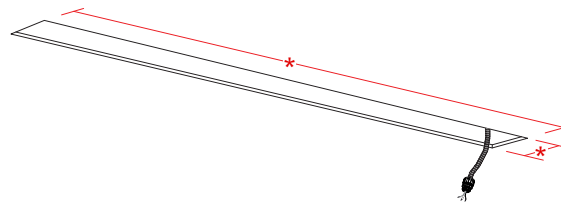


Make sure the power is turned off. Prepare the area and mark the mounting point location where the fixture is going to be installed according to the dimensions [\*] in the client drawings.

### 2

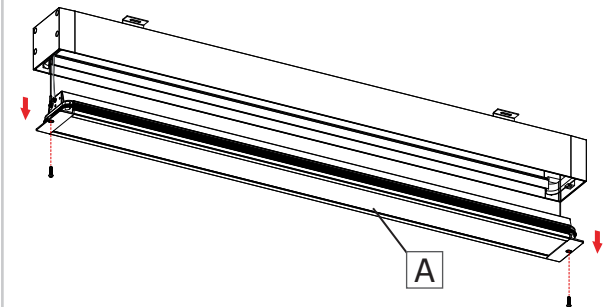


Unscrew and lower the lens frame (A) retained by security cables.

### 3

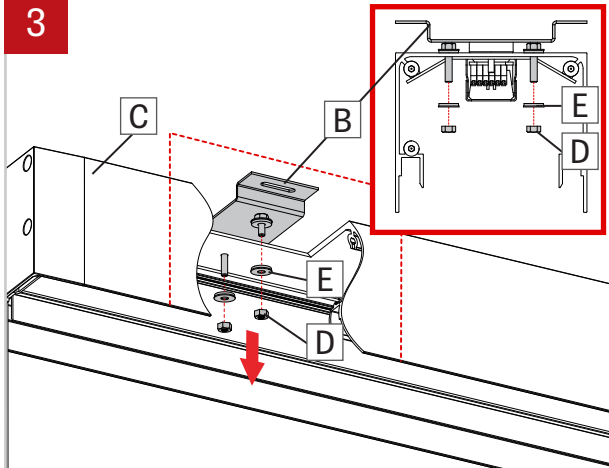


Remove the mounting brackets (B) from the fixture (C) by removing nuts (D), steel washers (E) (that are steel + rubber bonded together) on the mounting brackets (B) inside the fixture (C).

### 4

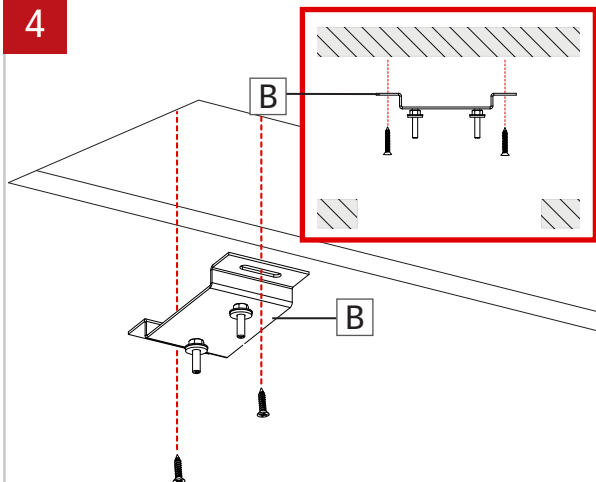


Install the mounting brackets (B) according to the mounting points dimension in the client drawing.


### 5

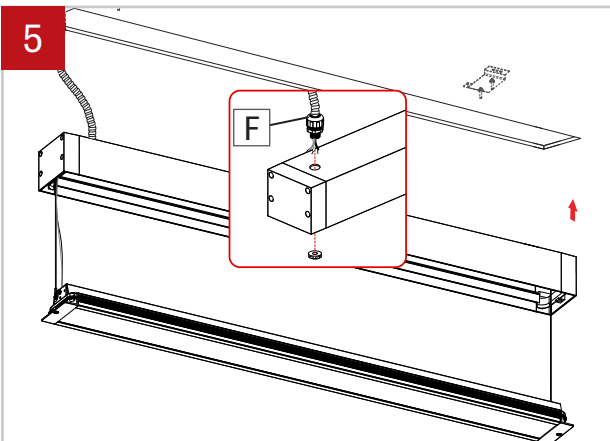


Connect the 1/2" trade size liquid-tight conduit fitting (by others) (F) to the 7/8" hole provided. Make sure the fitting is well tightened. A nonmetallic liquid-tight flexible conduit system needs to be used (by others).

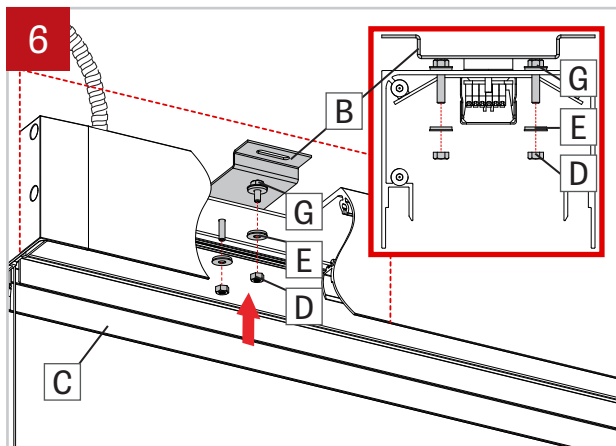

Insert the fixture (C) onto the mounting brackets (B). If the fixture position need adjustments use adjusting nuts (G) on the mounting brackets (B). Put back in place the steel washers (E) (that are steel + rubber bonded together) and tighten well the nuts (D) to attach the fixture.

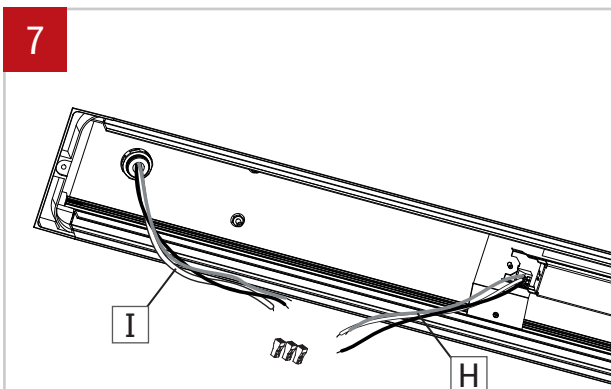


Make the electrical connections between the fixture wires (H) and the building wires (I) inside the fixture

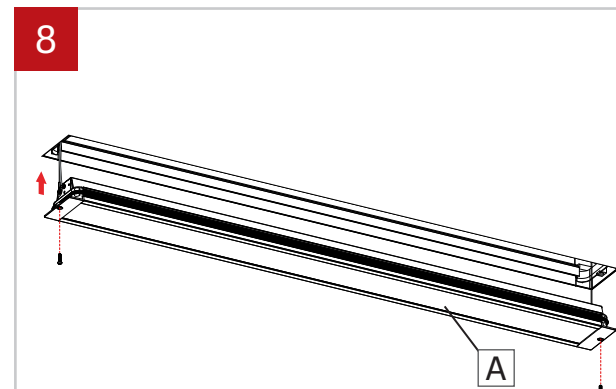


Screw back in place the lens frame (A) making sure not pinching the security cables on the sides. Make sure all the screws are well tightened and the metal frame is slightly regressed inside the aluminum housing


### 9 CONTINUOUS SYSTEM

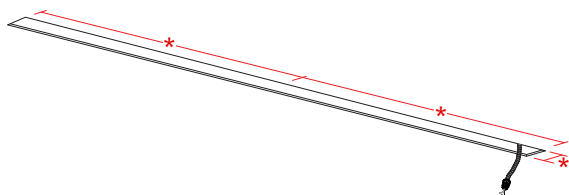







Make sure the power is turned off. Prepare the area and mark the mounting point location where the fixture is going to be installed according to the dimensions [\*] in the client drawings.

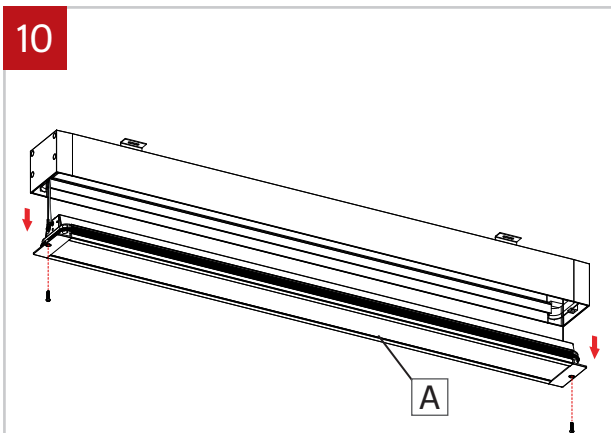


Unscrew and lower the lens frame (A) retained by security cables. Repeat for all fixtures in the run.

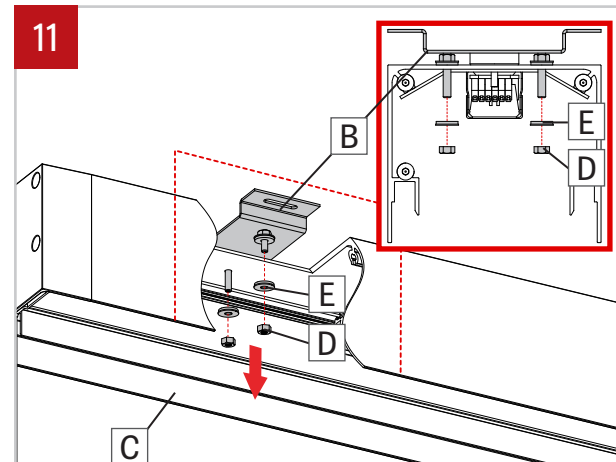


Remove the mounting brackets (B) from the fixture (C) by removing nuts (D), steel washers (E) (that are steel + rubber bonded together) on the mounting brackets (B) inside the fixture (C).

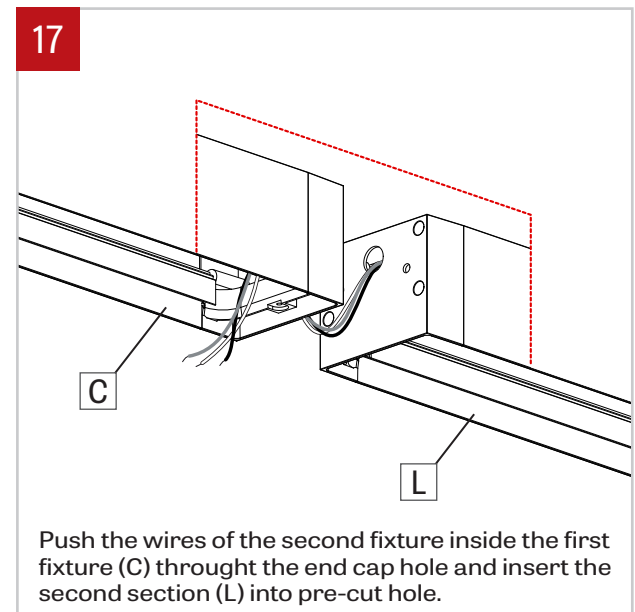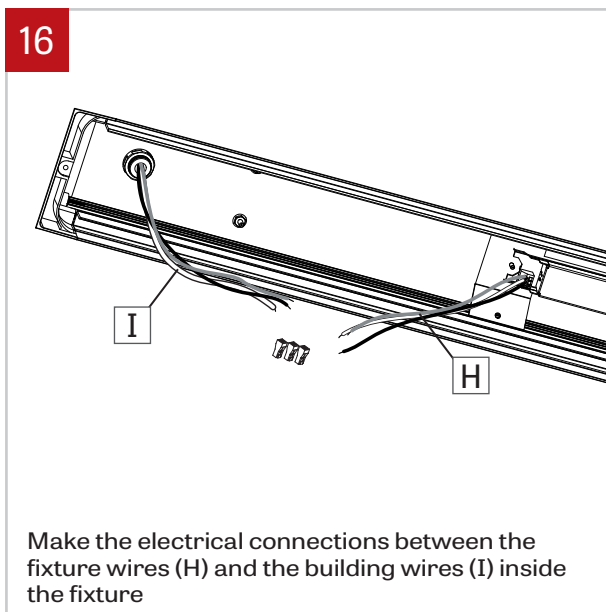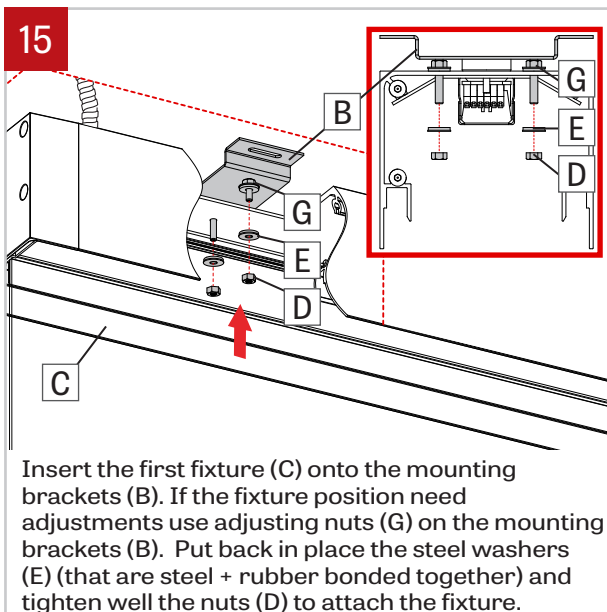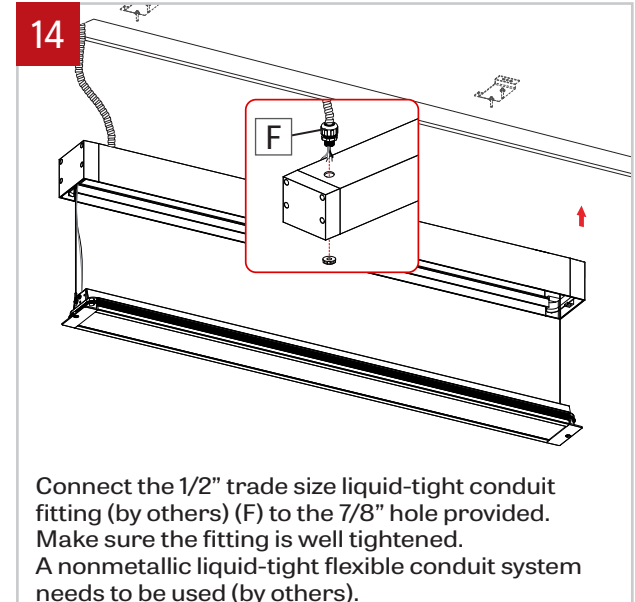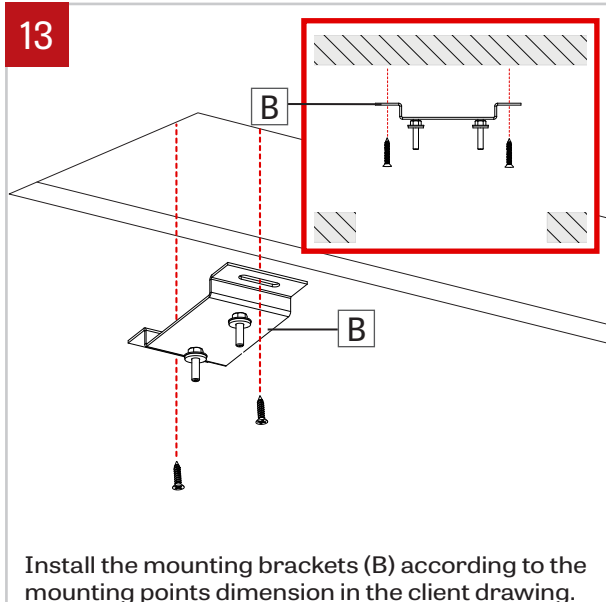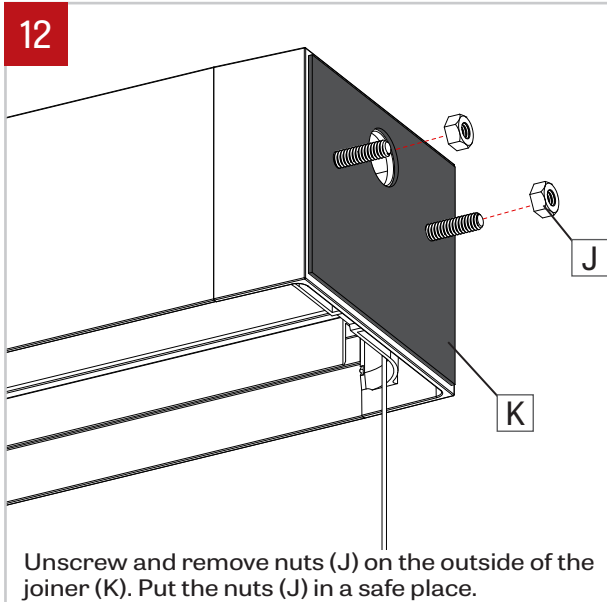


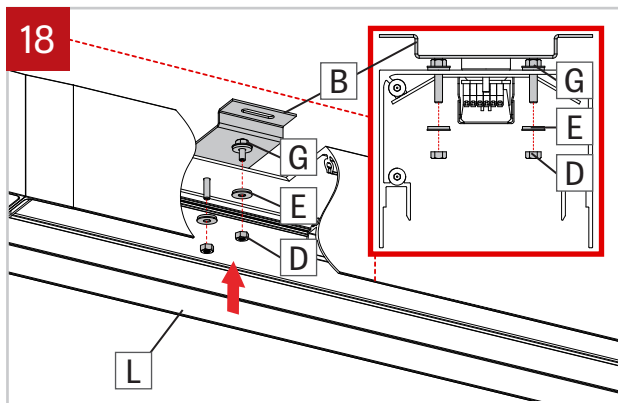


Insert the second section (L) into the mounting brackets (B). If the fixture position need adjustments use adjusting nuts (G) on the mounting brackets (B). Put back in place the steel washers (E) (that are steel + rubber bonded together) and tighten well the nuts (D) to attach the fixture.

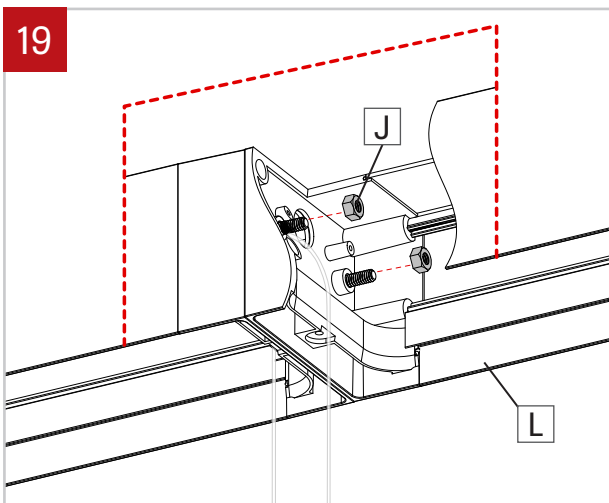

Reinstall the nuts (J) inside the second fixture (L) on the joiner to secure it. Tighten well the 2 joining screws and make sure the joining gasket is well compressed between the 2 extrusions.

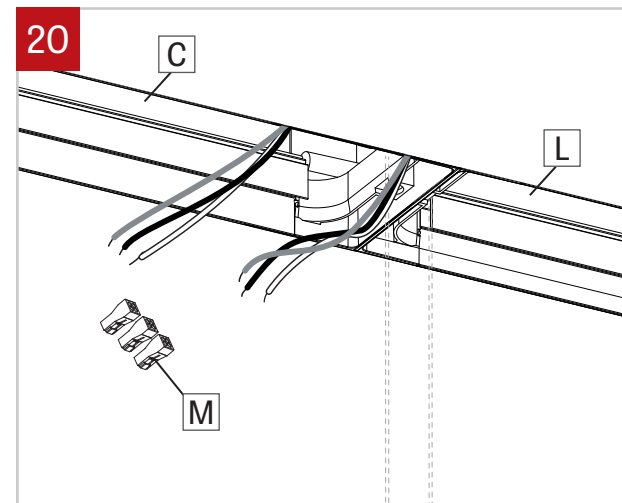

Make the wires connection between (C) and (L) using quick connectors (M).

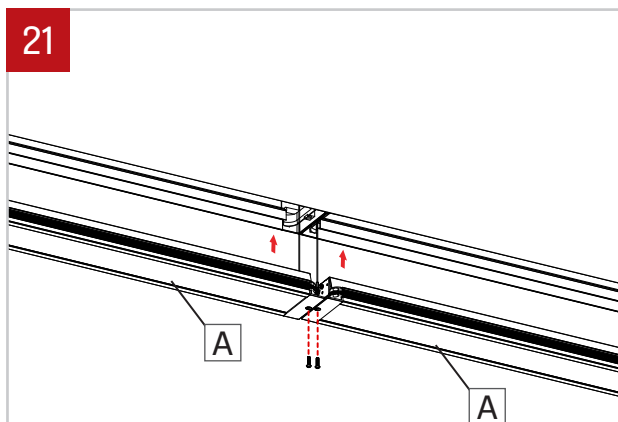

Screw back in place the lens frame (A) making sure not pinching the security cables on the sides. Make sure all the screws are well tightened and the metal frame is slightly regressed inside the aluminum housing