

INSTALLATION INSTRUCTIONS



This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.



Disconnect power before installation or servicing.



Do not cover the light element lens or heatsink with any materials or adhesive tapes when the fixture is powered.



Handle the LED cartridge carefully during removal and installation. Tools must not touch the LED chips. Contact may result in damage and LED failure.



Wire dimming conductors as Class 1.



A luminaire with more than one power supply connection means shall be connected to only one branch circuit.



For luminaires specified as recessed, clearance between the sides of the luminaire and parts of the building must be 1/2" minimum; clearance to insulating materials to be 3" minimum, unless luminaire is IC rated.




For luminaires installed in wet locations, properly seal all mounting and electrical points.



Warranty claims will not be accepted if incorrect driver or light element is used.

INSTALLATION INSTRUCTIONS

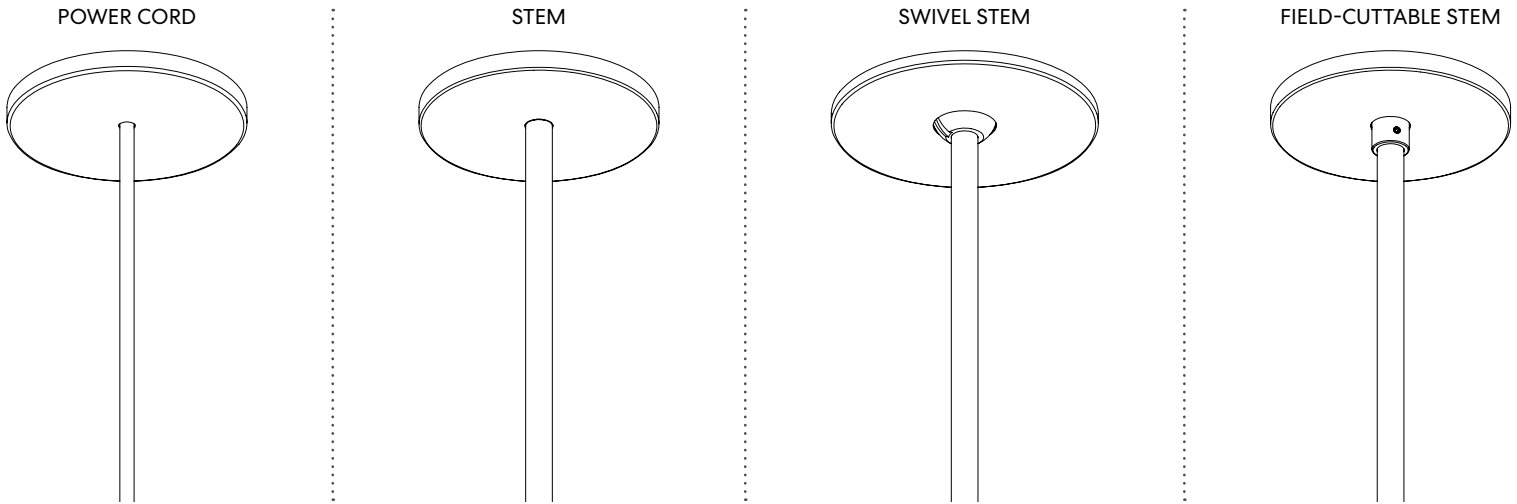

Go to the section specific to your suspension option.

For electrical connections, please refer to the [wiring diagram guide](#).


For remote driver box installation instructions, please refer to the [remote driver installation sheet](#).



INDEX

Power cord.....	P.3
Stem.....	P.7
Swivel stem.....	P.10
Field-cutable stem.....	P.16

POWER CORD

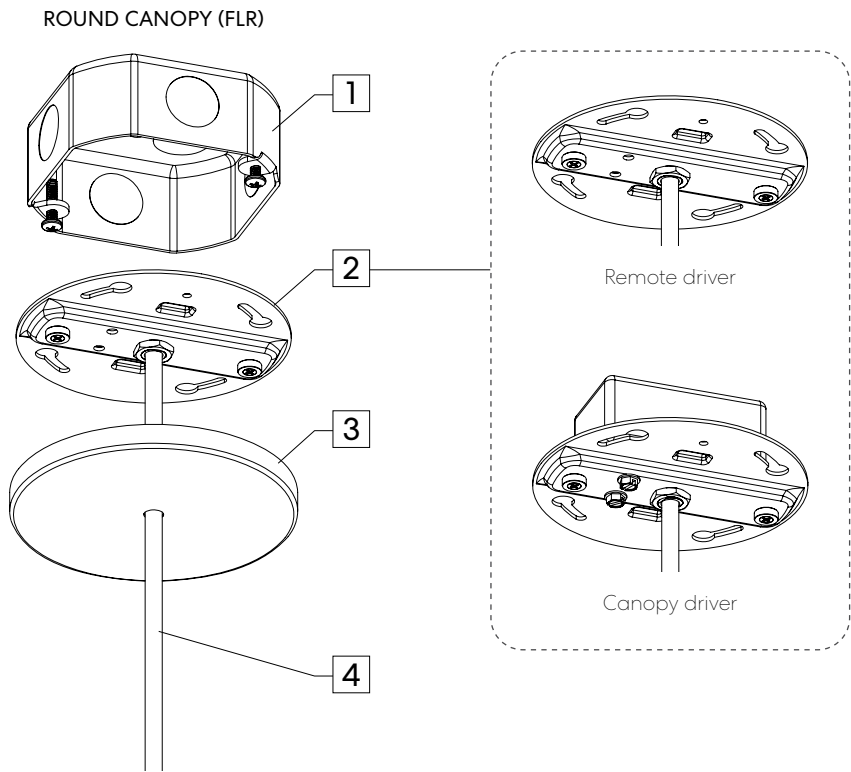

ITEMS LIST

1	Standard J-box (by others)
2	Mounting plate
3	Flat canopy
4	Power cord

TOOLS REQUIRED


- Flat head screwdriver
- Phillips screwdriver
- Power cord cutter (as required)
- Wire stripper (as required)

CANOPY SIZE

ROUND	Ø 4 1/2" Height 3/8"
-------	-------------------------


POWER CORD

1 DETACH CANOPY.

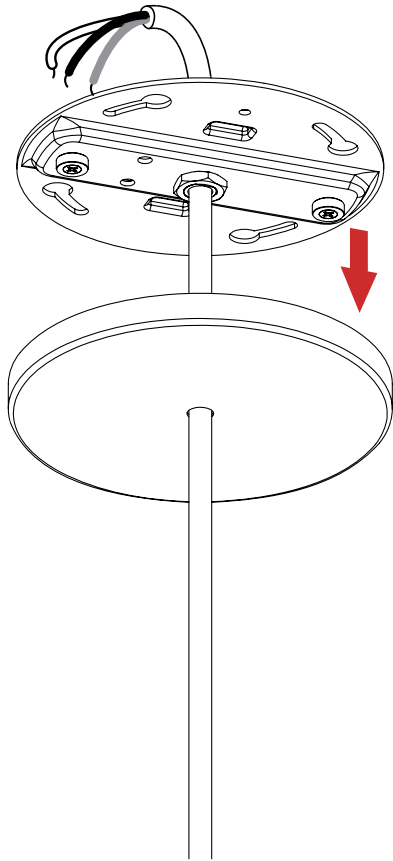

2 ADJUST POWER CORD LENGTH. **OPTIONAL**


2-1 Untighten the cable holder.

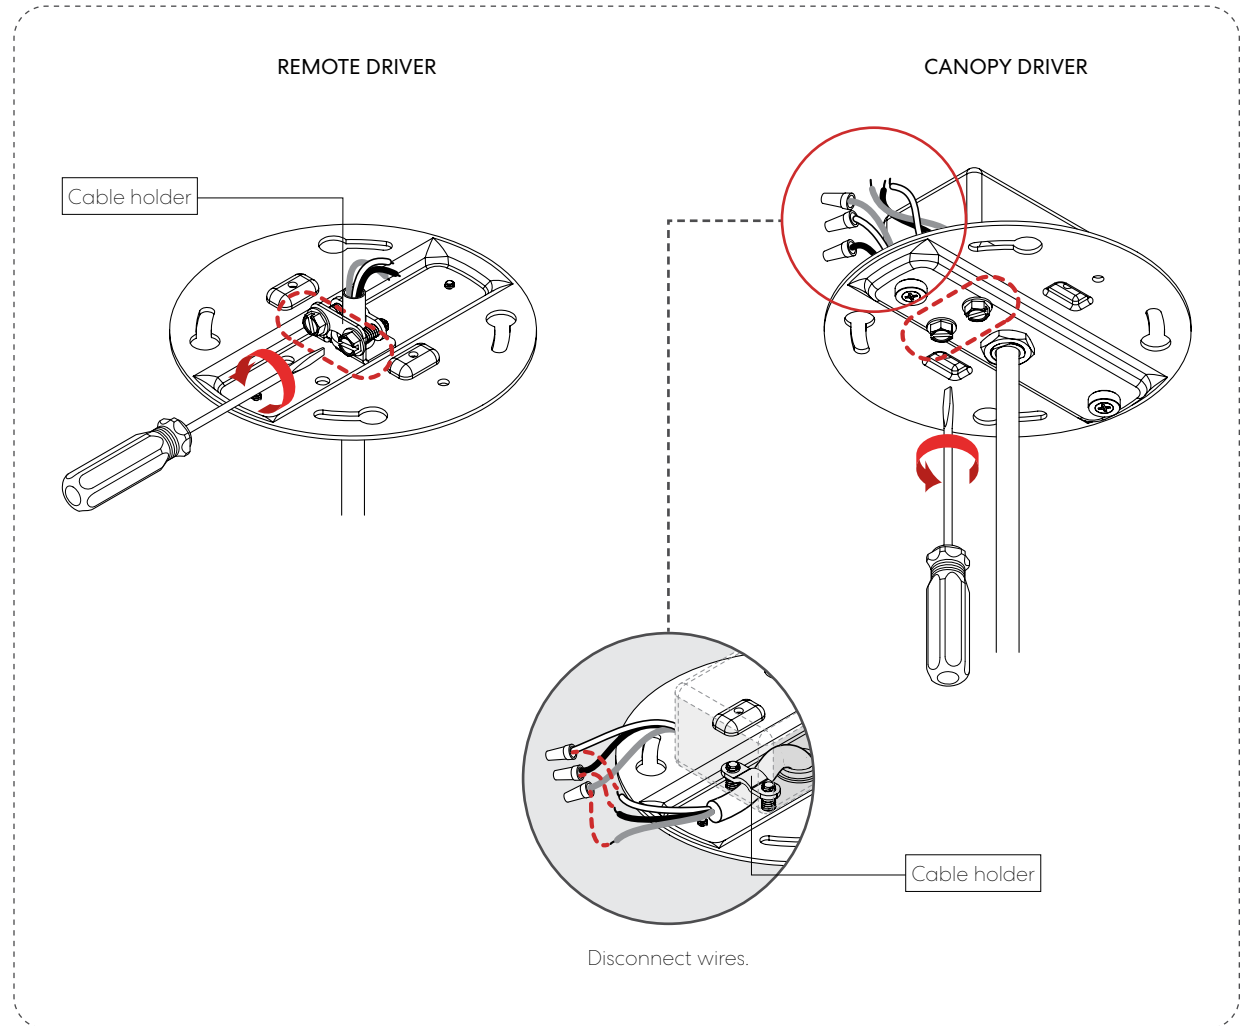


POWER CORD

2 ADJUST POWER CORD LENGTH. **OPTIONAL**


2-2 Adjust power cord length.

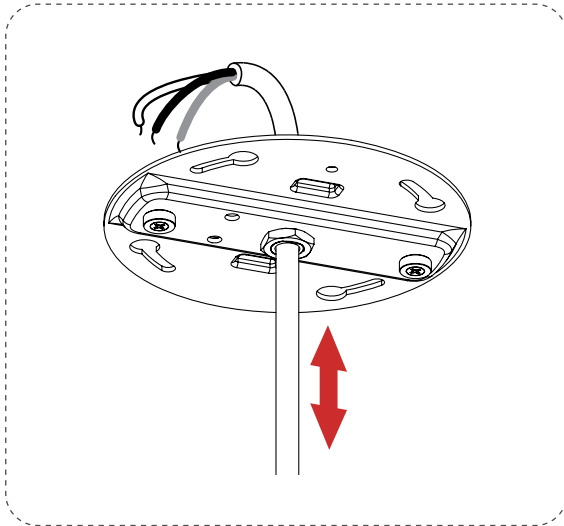

2-3 Cut the excess power cord.

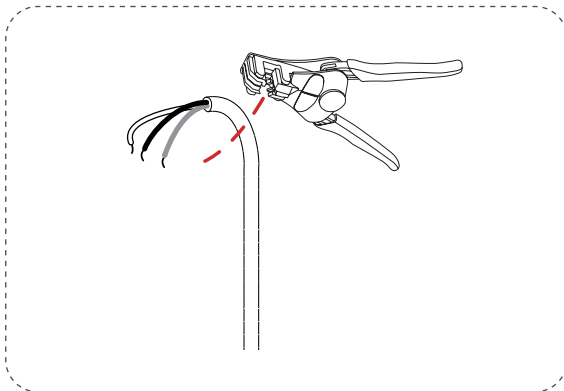


2-4 Tighten the cable holder.

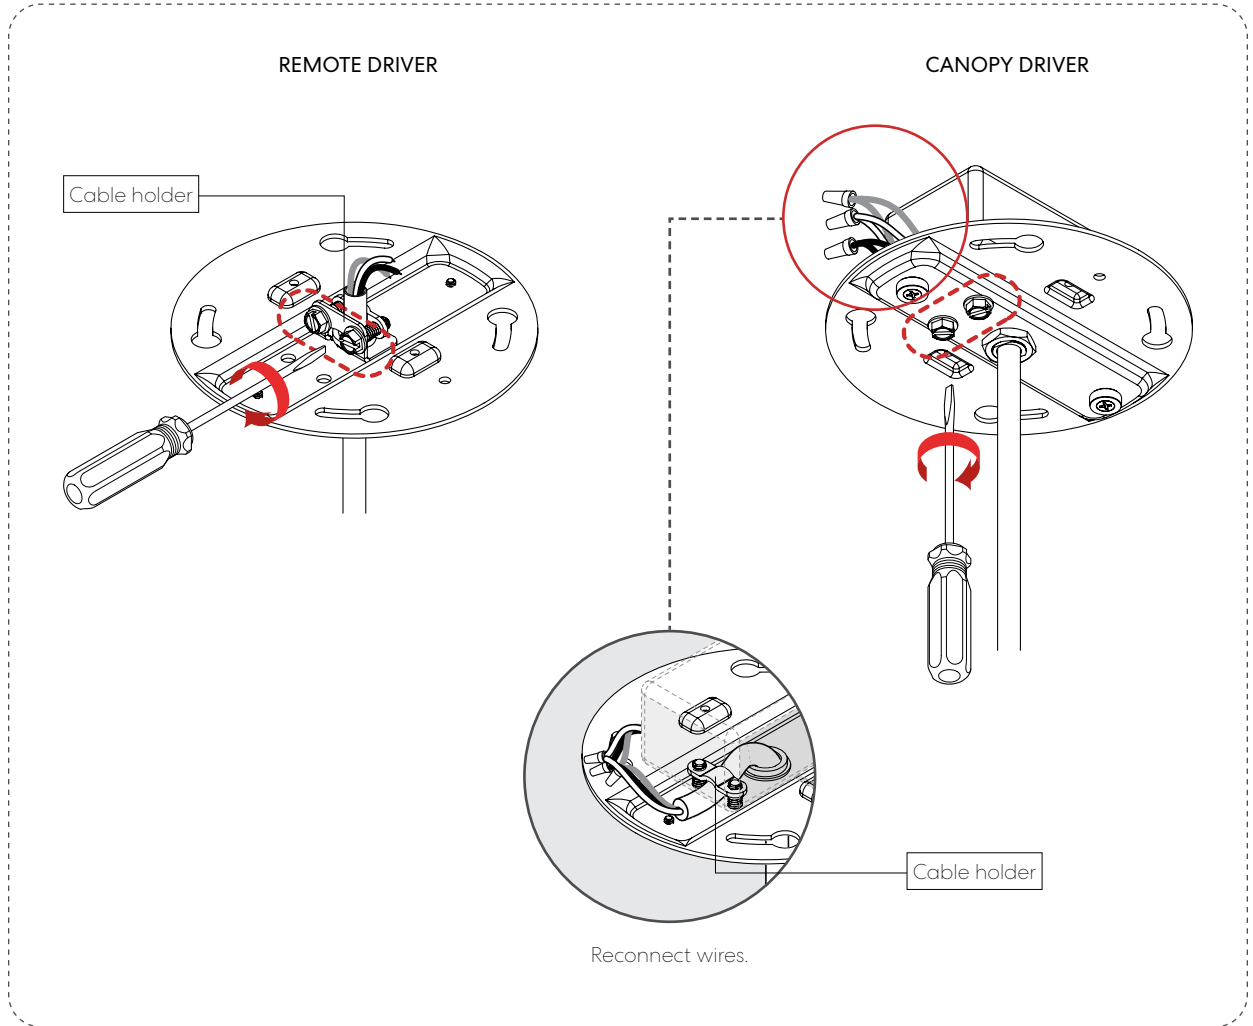


POWER CORD

3 MAKE ELECTRICAL CONNECTIONS.

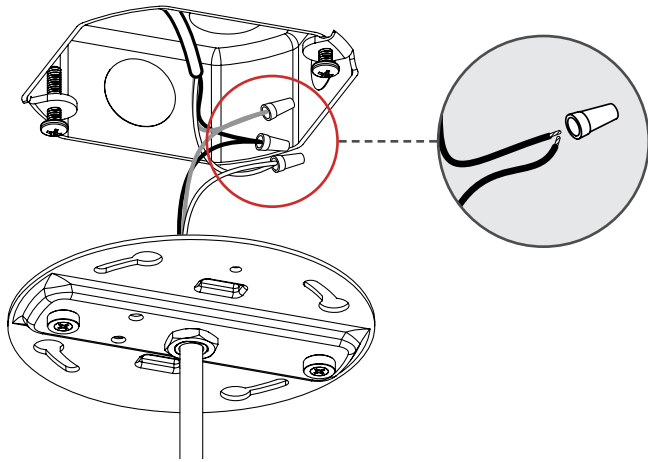


Note: Number of wires may vary.


5 MOUNT CANOPY.

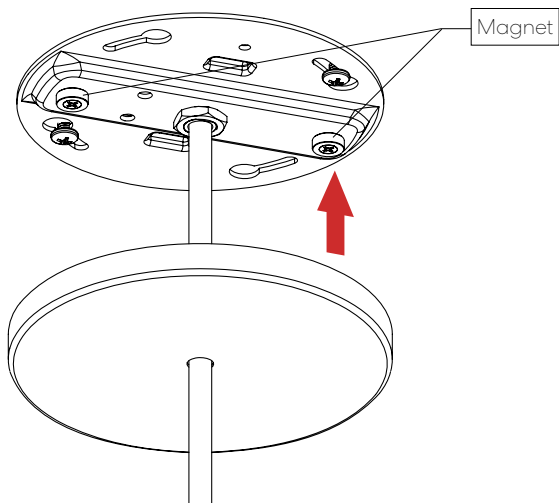

4 FIX MOUNTING PLATE.

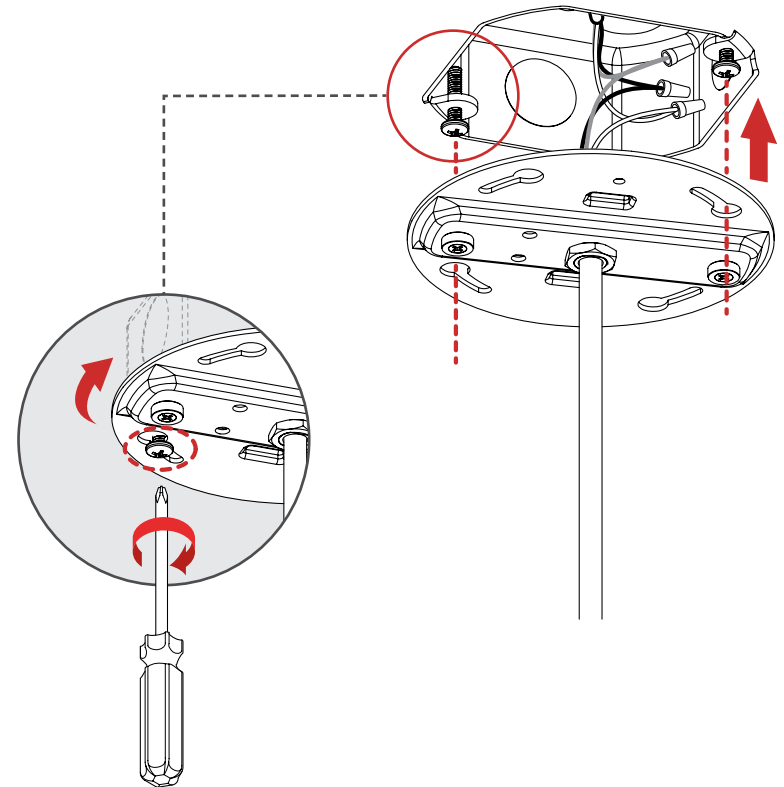

STEM

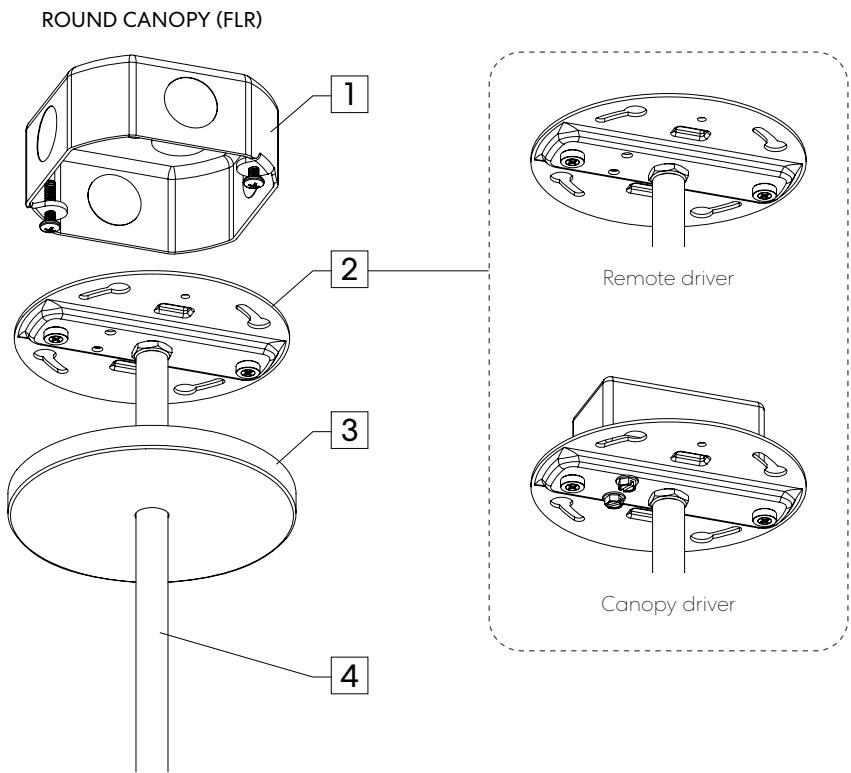

ITEMS LIST

1	Standard J-box (by others)
2	Mounting plate
3	Flat canopy
4	Stem

TOOLS REQUIRED

- Phillips screwdriver

CANOPY SIZE

ROUND	Ø 4 1/2" Height 3/8"
-------	-------------------------


GLOBE

Pendant - Flat Canopy




STEM

1 DETACH CANOPY.

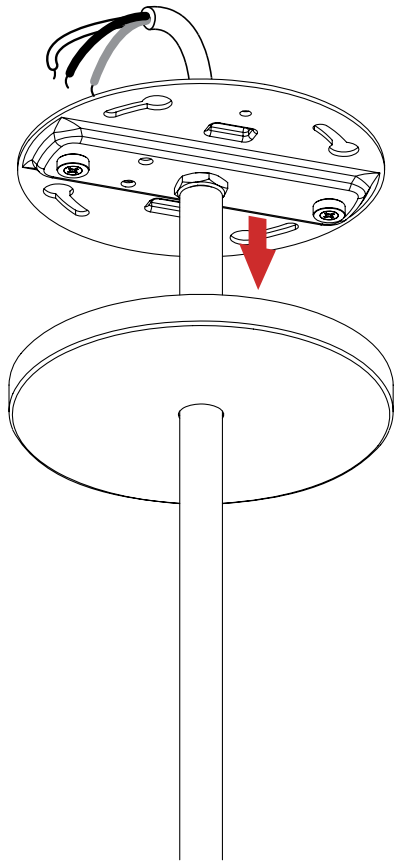


2 MAKE ELECTRICAL CONNECTIONS.

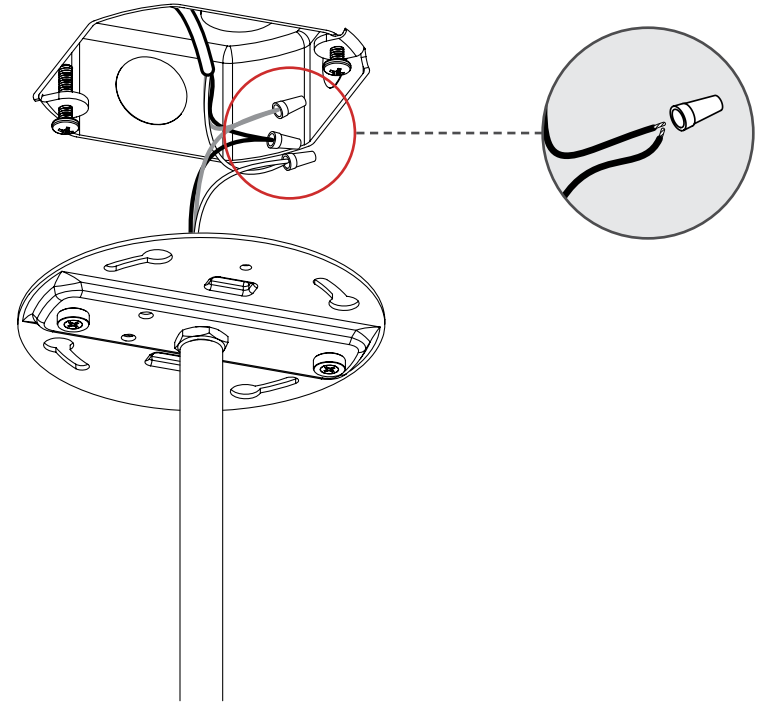


Note: Number of wires may vary.

STEM

3 FIX MOUNTING PLATE.

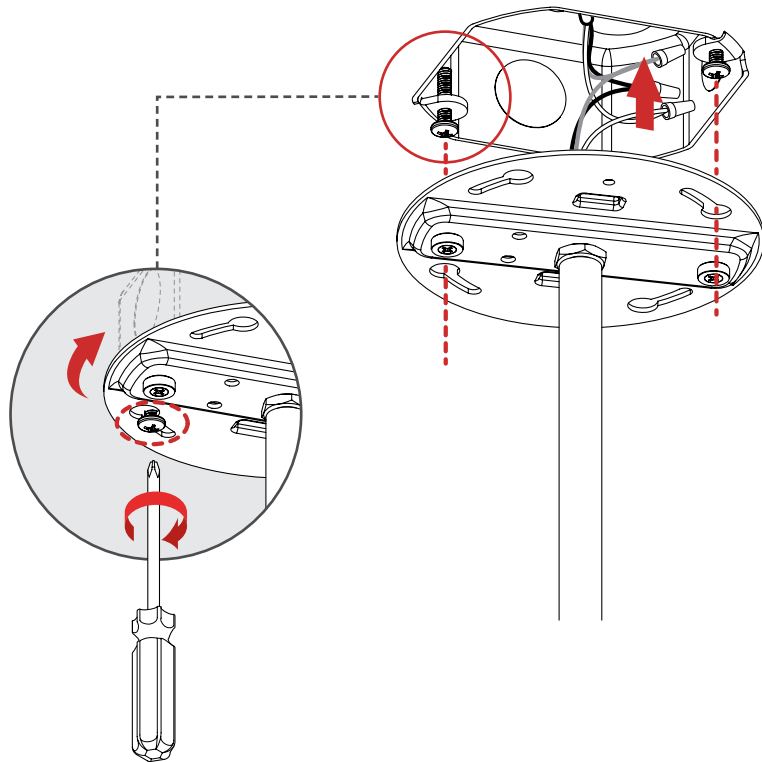


4 MOUNT CANOPY.

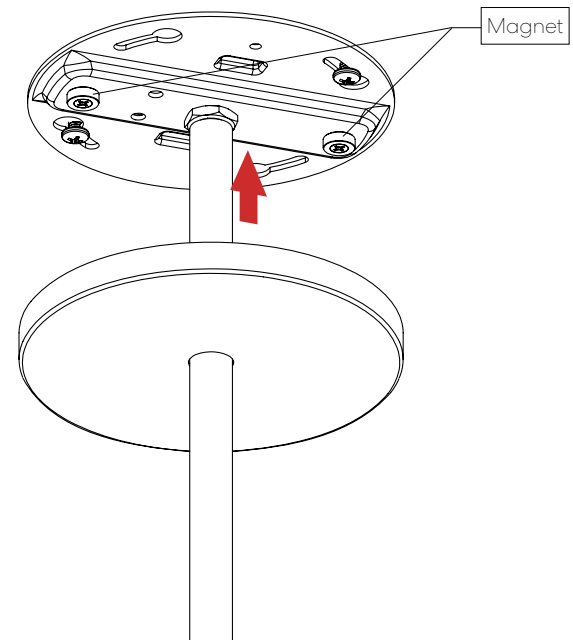

SWIVEL STEM

ROUND CANOPY (FLR)

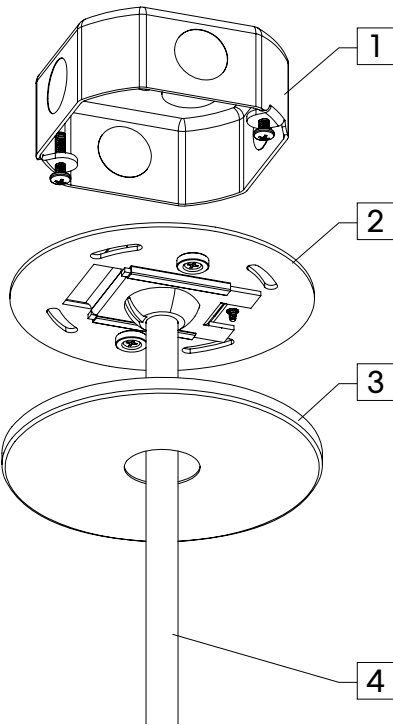

ITEMS LIST

1	Standard J-box (by others)
2	Mounting plate
3	Flat canopy
4	Swivel stem

TOOLS REQUIRED

- Flat head screwdriver
- Phillips screwdriver
- Power cord cutter (as required)
- Wire stripper (as required)
- Allen key 5/64" (as required)
- 1/8" drill bit (as required)
- Hacksaw (as required)


CANOPY SIZE

ROUND	Ø 5" Height 1/4"
-------	---------------------

SWIVEL STEM

1 ADJUST STEM / POWER CORD LENGTH. **OPTIONAL**


1-1 Detach swivel stem assembly.

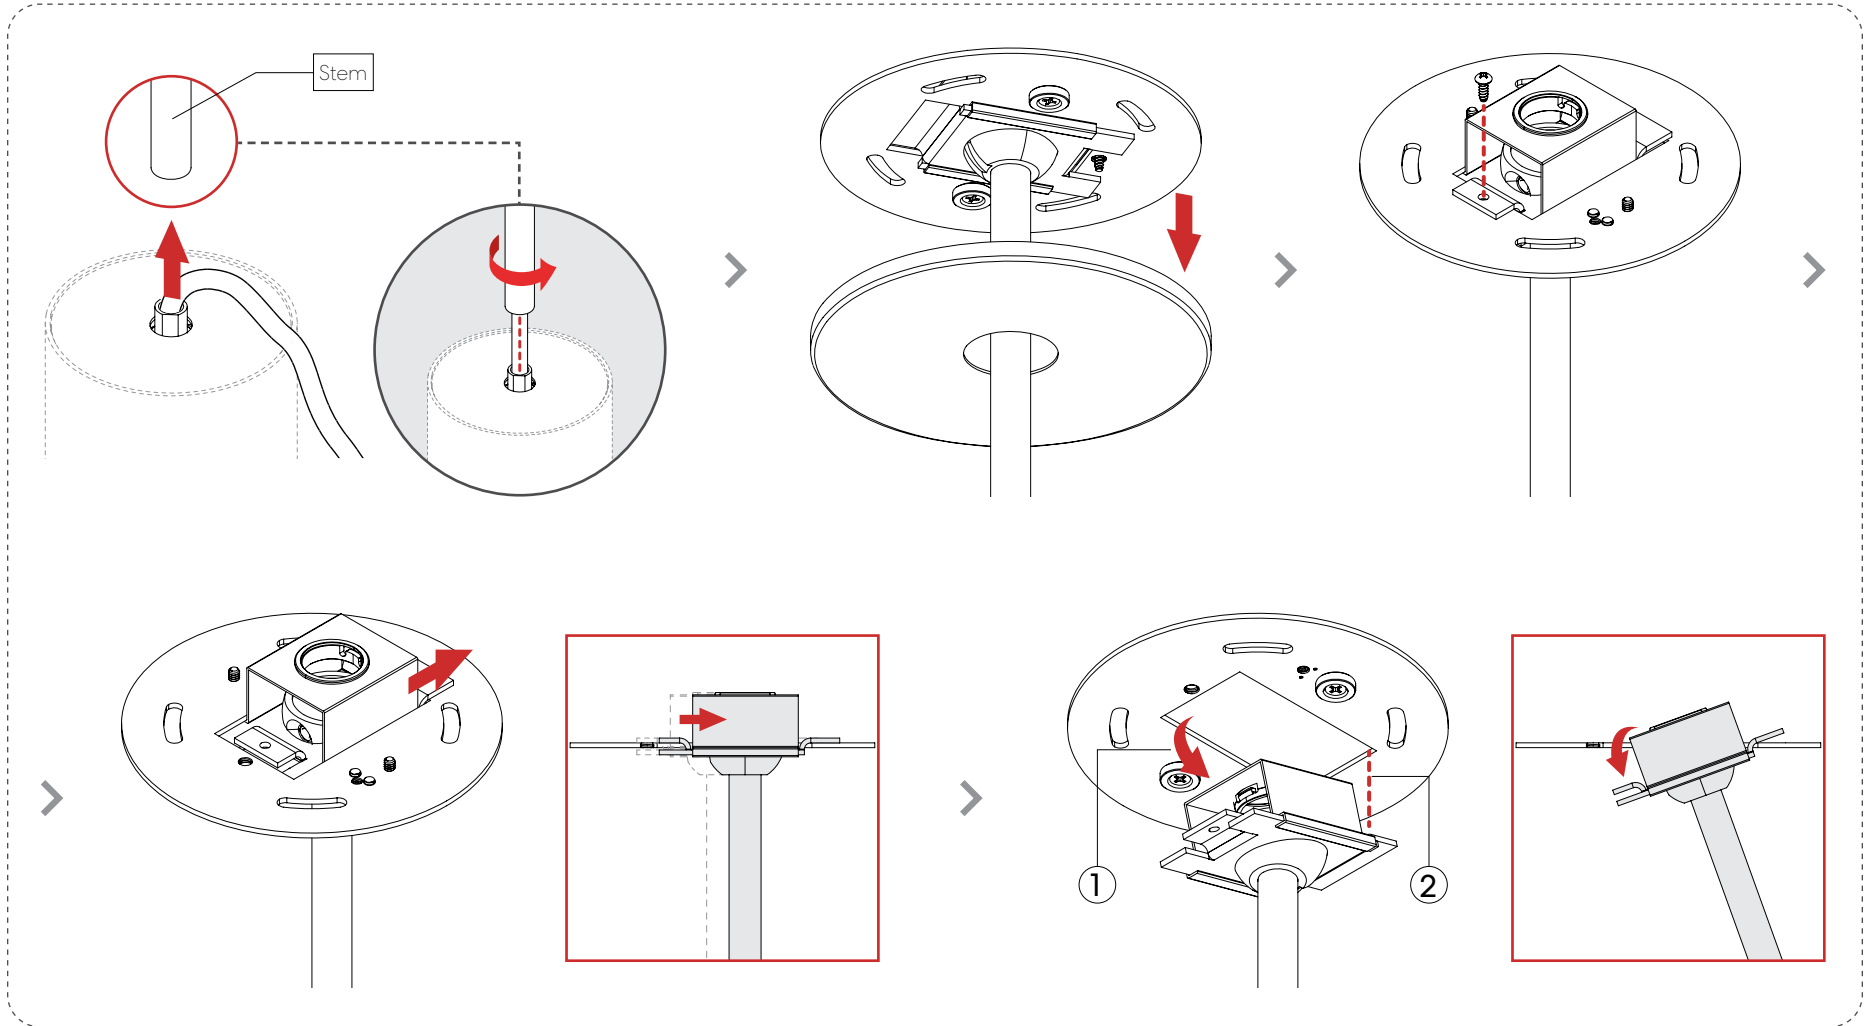


SWIVEL STEM

1 ADJUST STEM / POWER CORD LENGTH. **OPTIONAL**

1-2 Detach swivel stem.

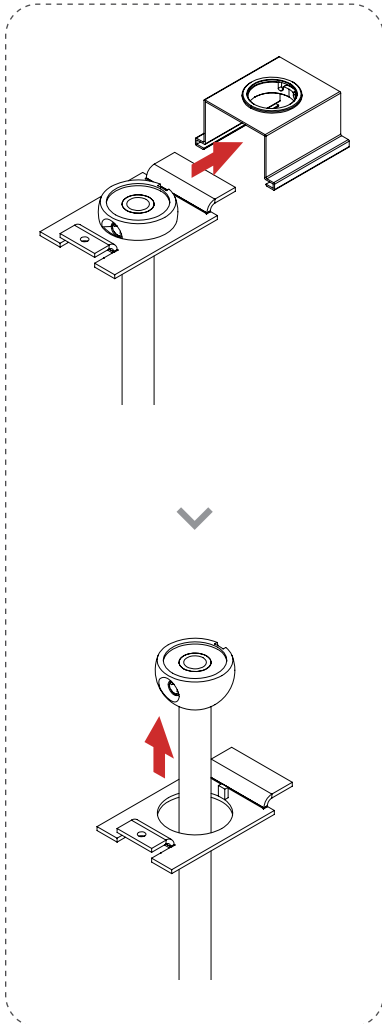


1-3 Adjust stem length.

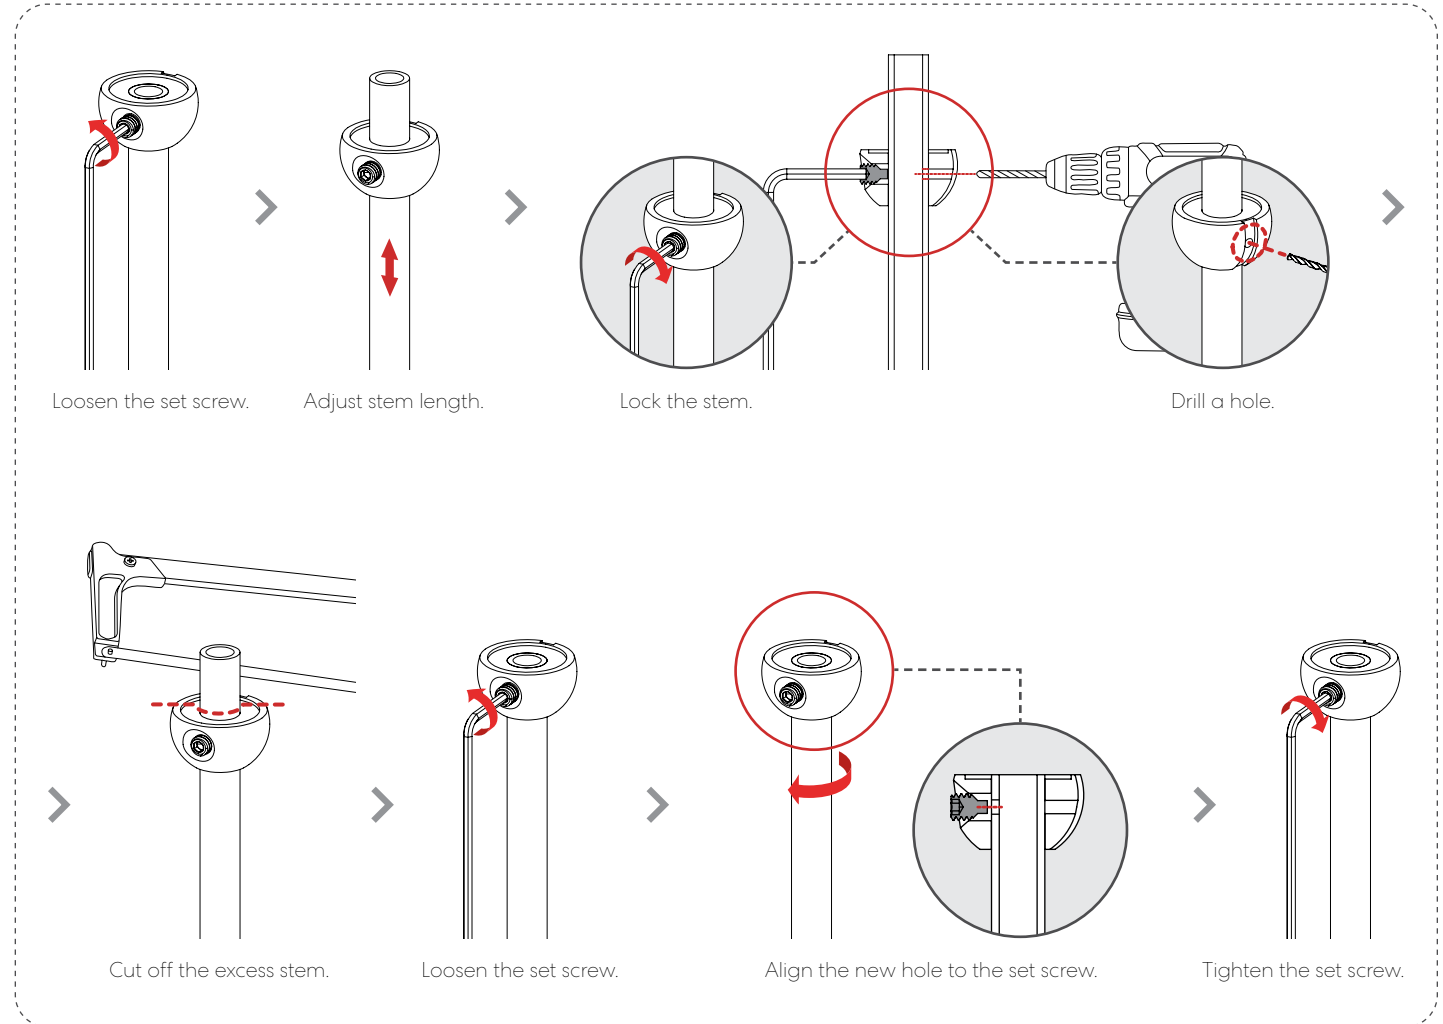

SWIVEL STEM

1 ADJUST STEM / POWER CORD LENGTH. **OPTIONAL**

1-4 Reassemble swivel stem & adjust power cord length.

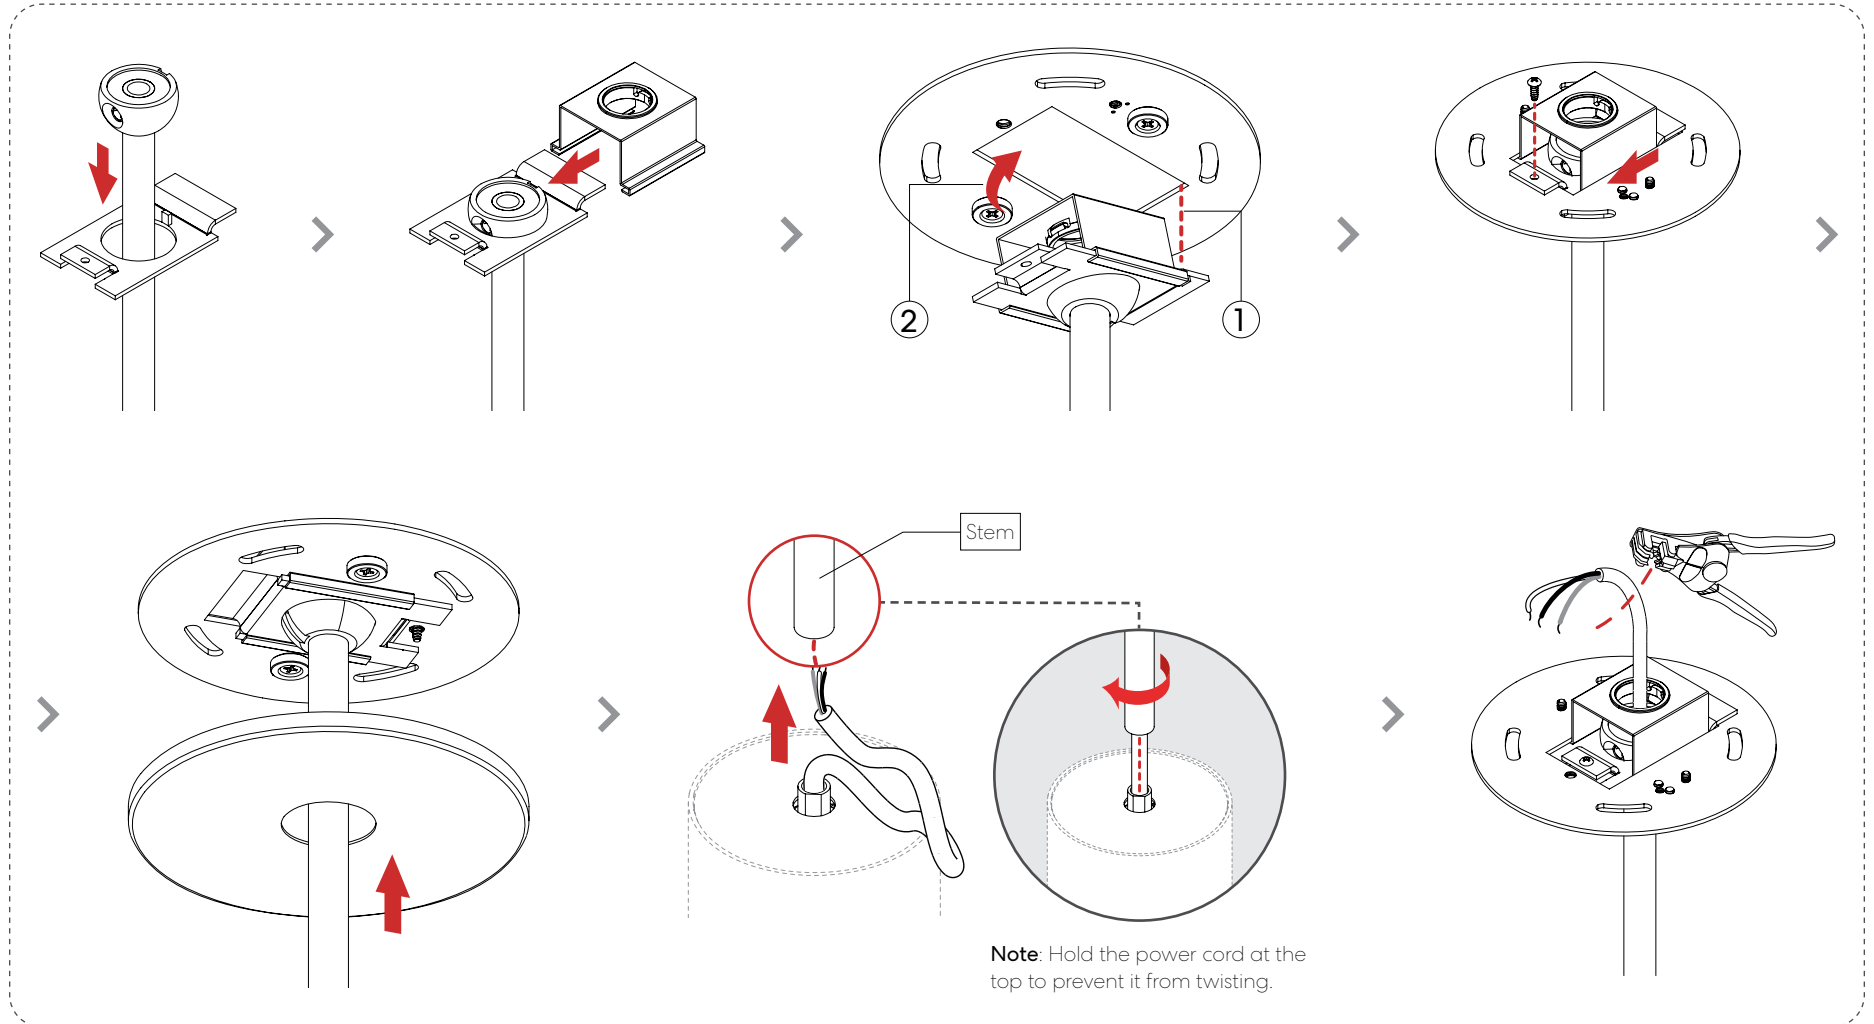


GLOBE

Pendant - Flat Canopy




SWIVEL STEM

2 DETACH CANOPY.

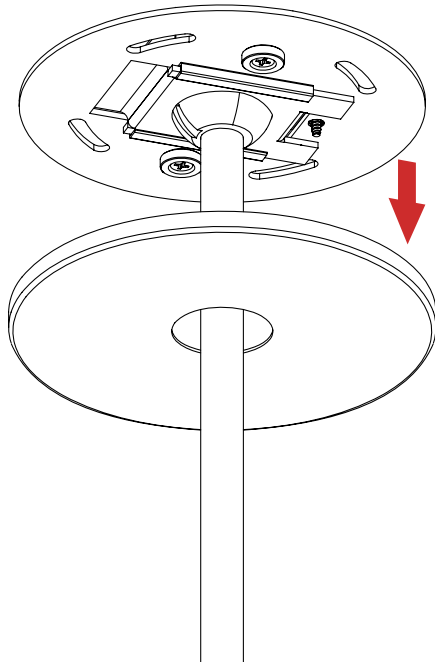

3 MAKE ELECTRICAL CONNECTIONS.

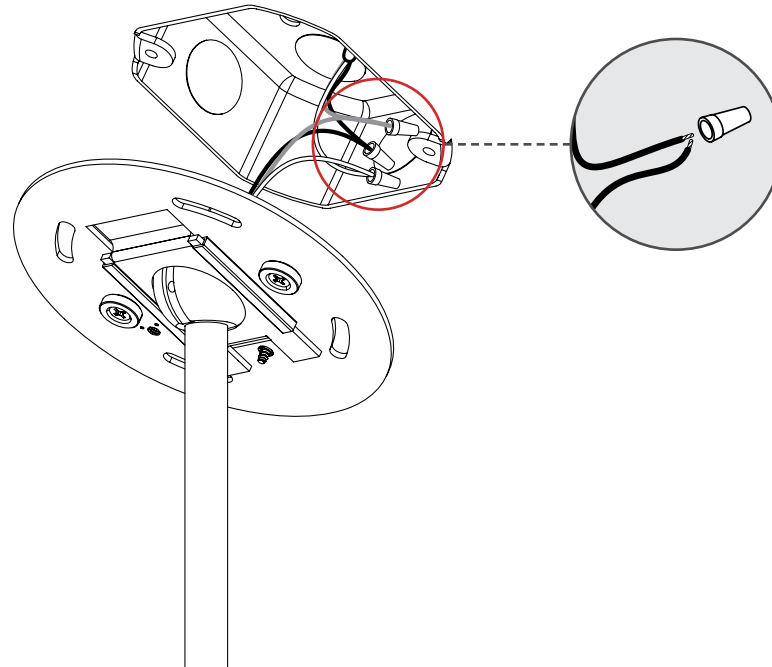

Note: Number of wires may vary.


GLOBE

Pendant - Flat Canopy




SWIVEL STEM


4 FIX MOUNTING PLATE.

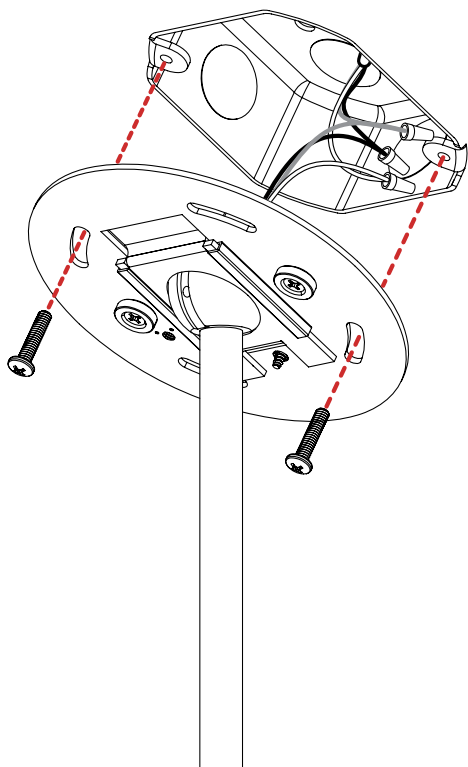

5 MOUNT CANOPY.

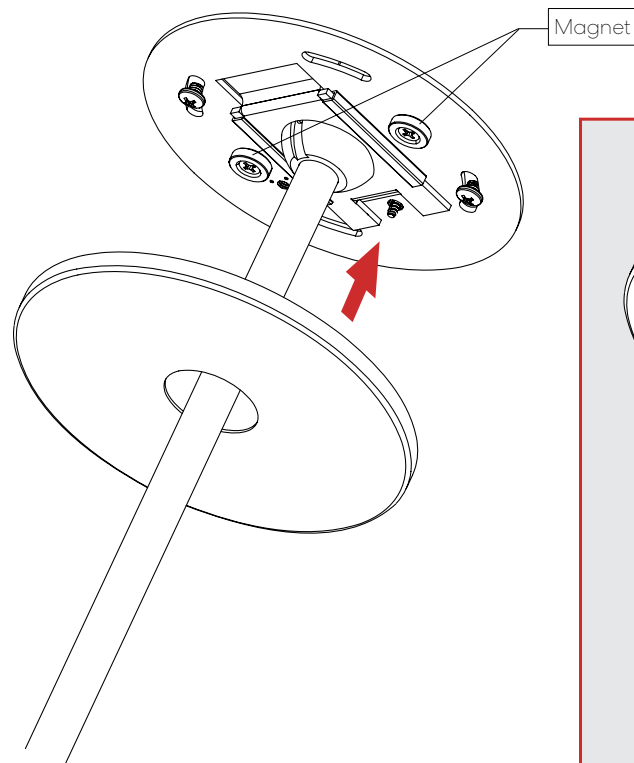

FIELD-CUTTABLE STEM

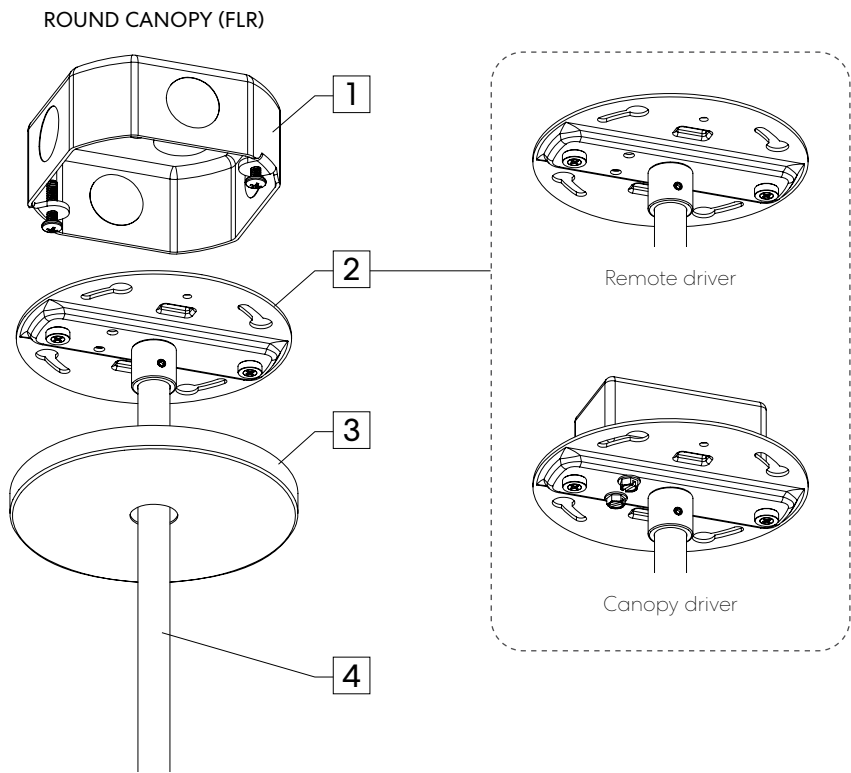

ITEMS LIST

1	Standard J-box (by others)
2	Mounting plate
3	Flat canopy
4	Field-cuttable stem

TOOLS REQUIRED


- Flat head screwdriver
- Phillips screwdriver
- Power cord cutter
- Wire stripper
- Allen key 5/64"
- 1/8" drill bit
- Hacksaw

CANOPY SIZE

ROUND	Ø 4 1/2" Height 3/8"
-------	-------------------------


FIELD-CUTTABLE STEM

1 DETACH CANOPY.

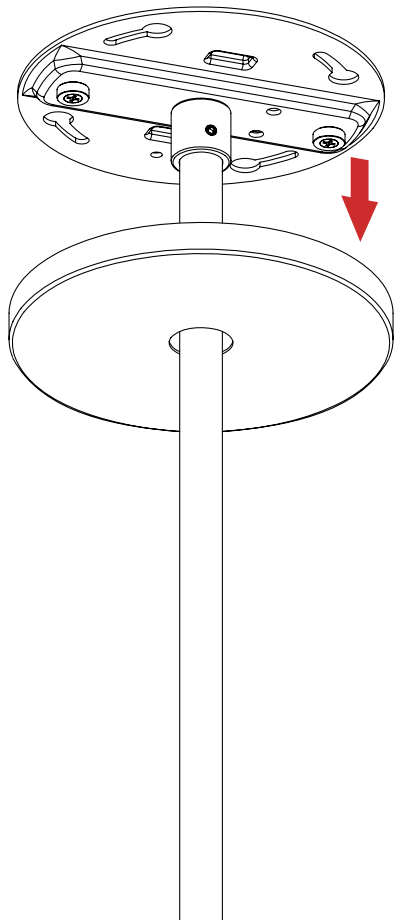


2 REMOVE DRIVER AND UNTIGHTEN CABLE HOLDER. CANOPY DRIVER ONLY

Note: If the driver is in the fixture or remote, skip to step 3.

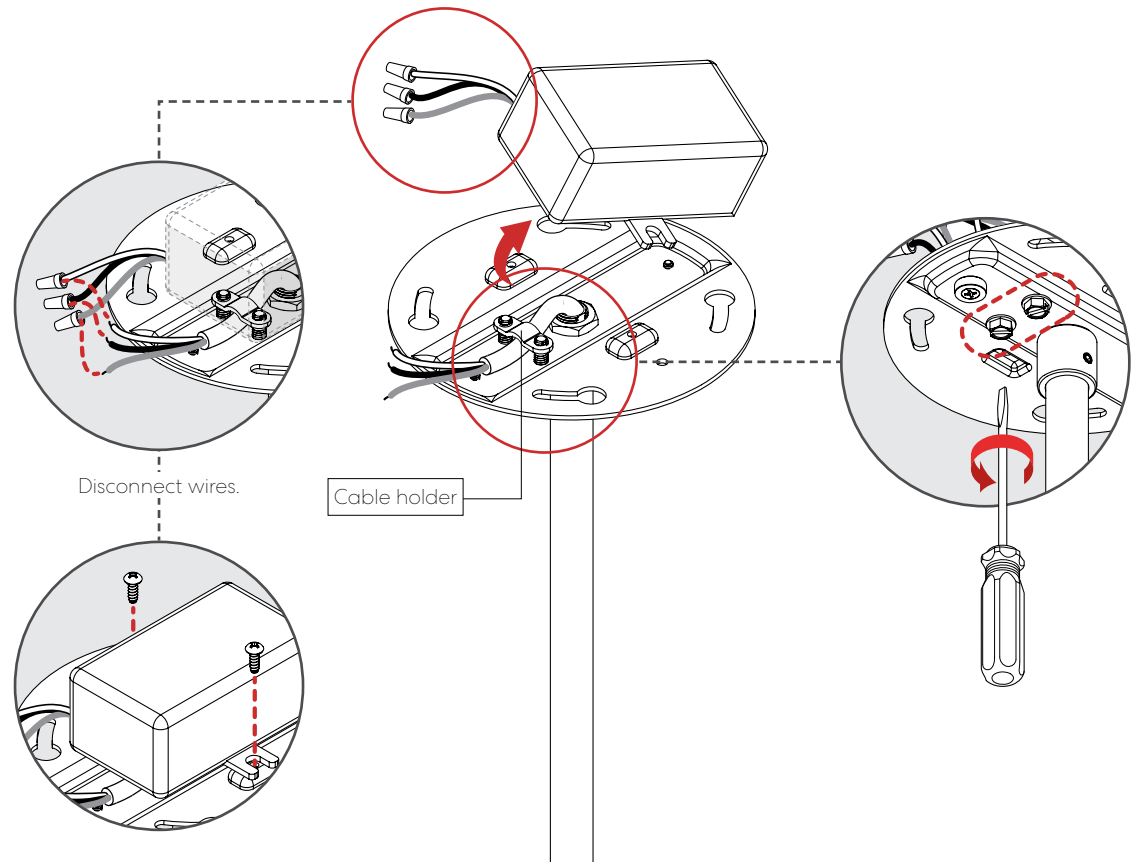


FIELD-CUTTABLE STEM


3 DETACH STEM.

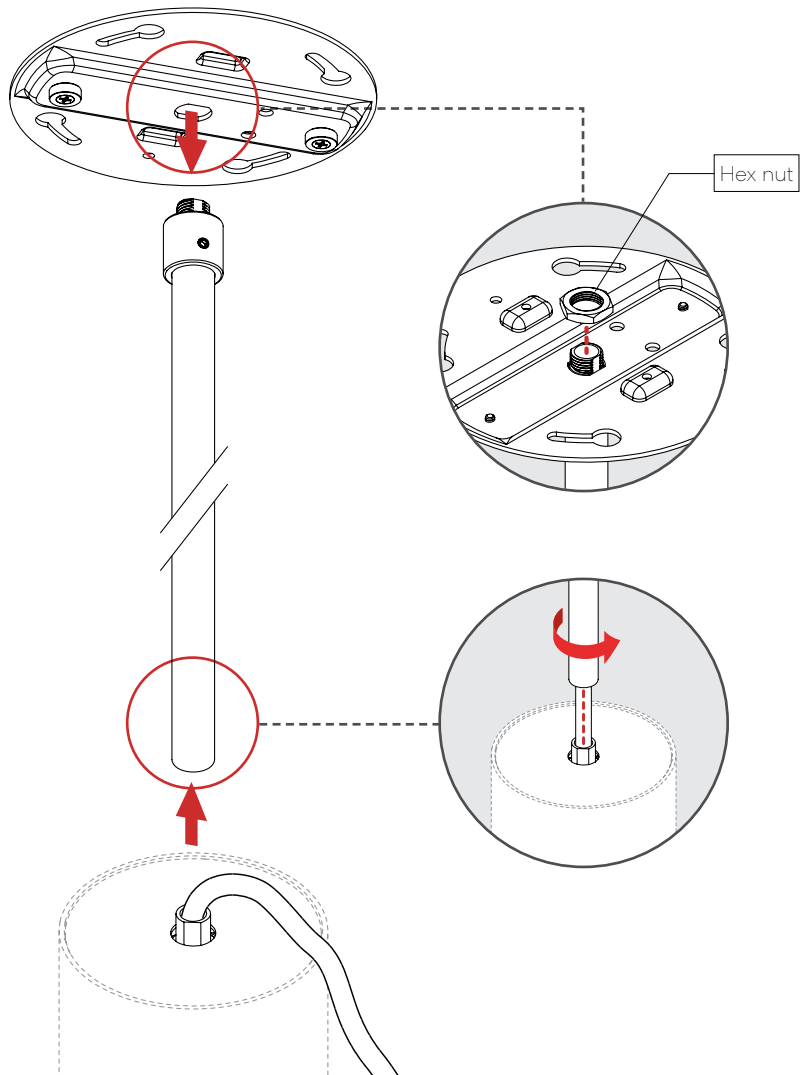

4 DETACH ADAPTER.

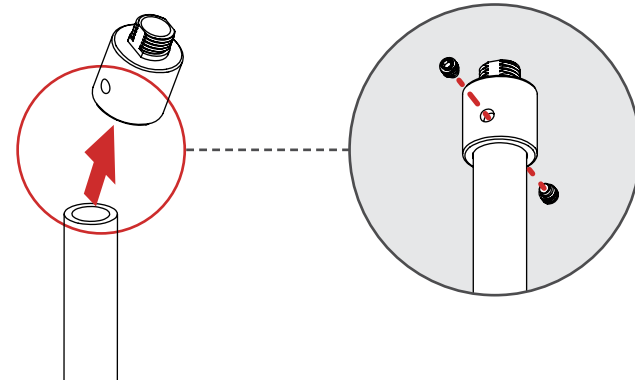


5 CUT STEM.

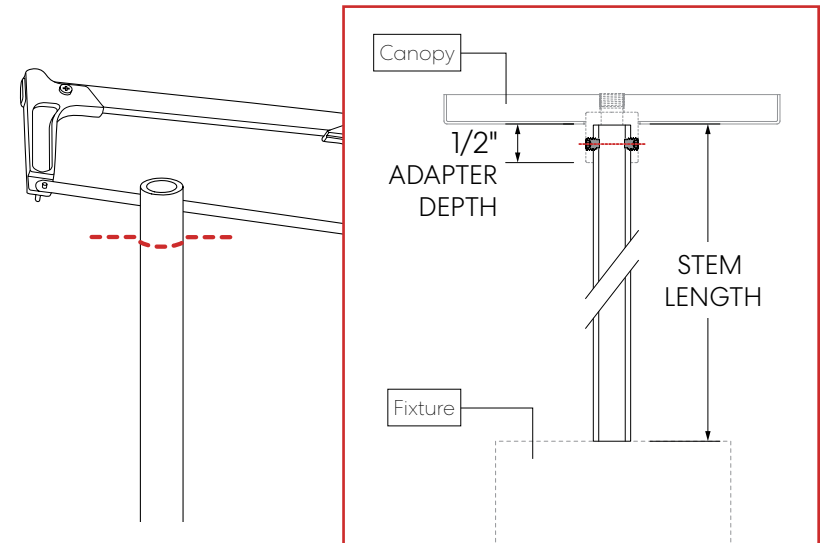


Note: Deburr the stem to eliminate any sharp edges.

FIELD-CUTTABLE STEM


6 INSERT STEM INTO ADAPTER.



7 FIX STEM TO ADAPTER.

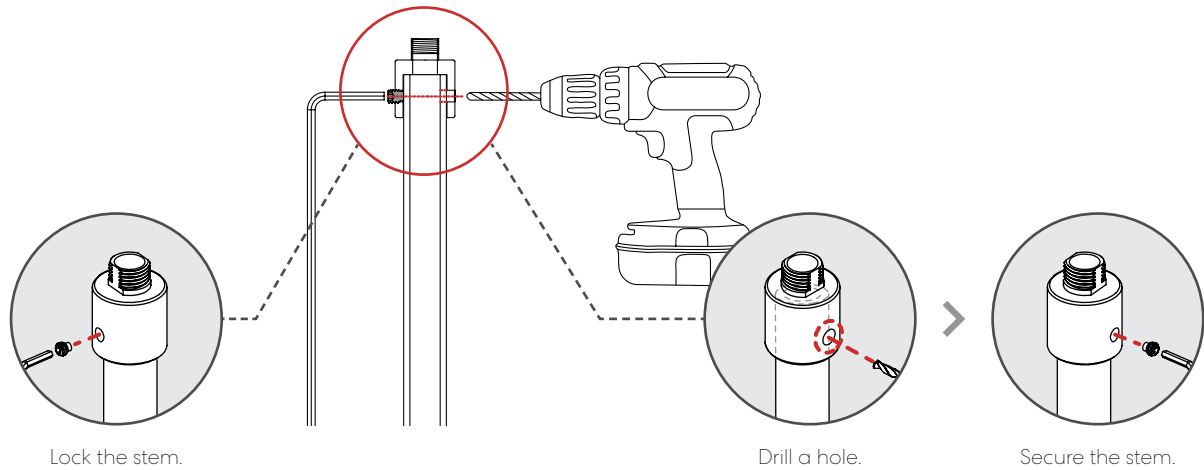


Repeat the process on the other side.

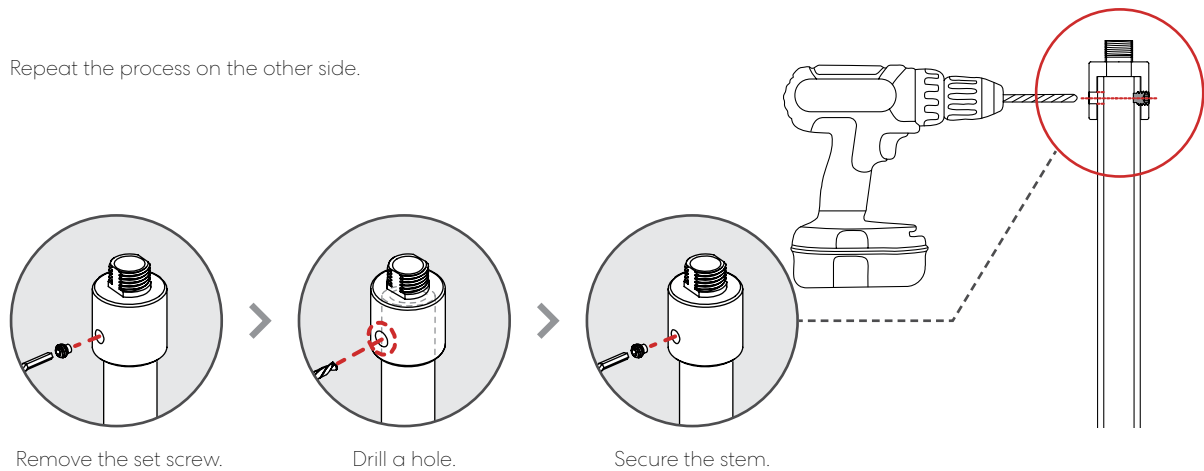


FIELD-CUTTABLE STEM

8 INSERT CANOPY AND POWER CORD.

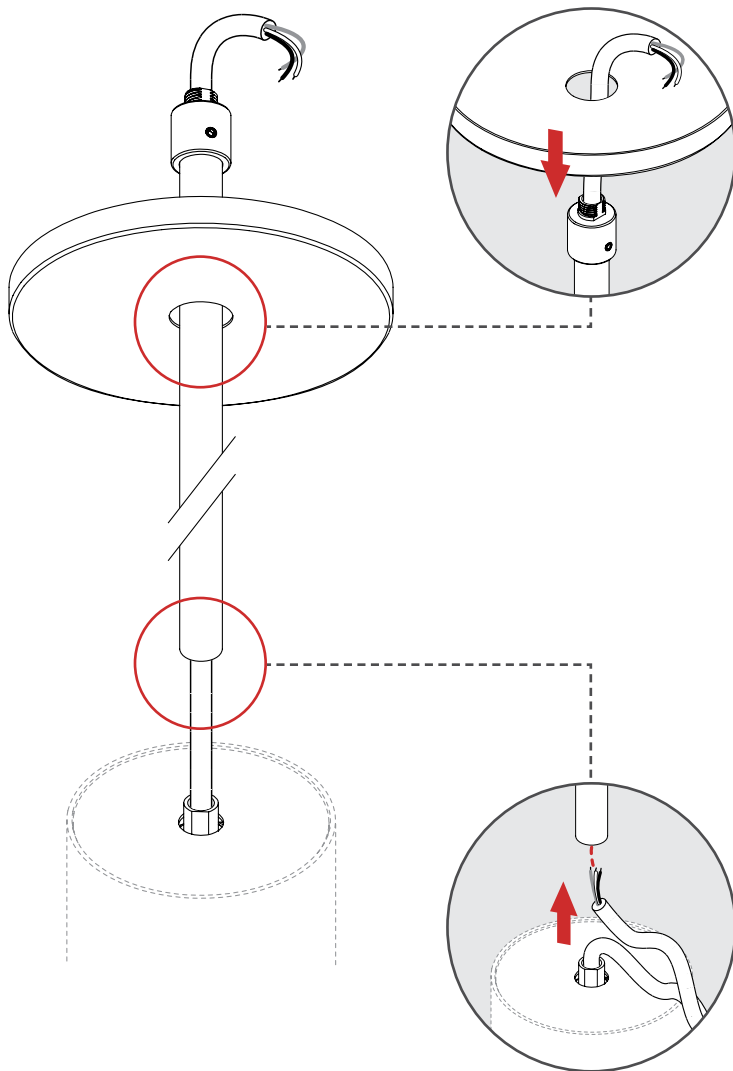

9 REINSTALL STEM ONTO FIXTURE AND MOUNTING PLATE.

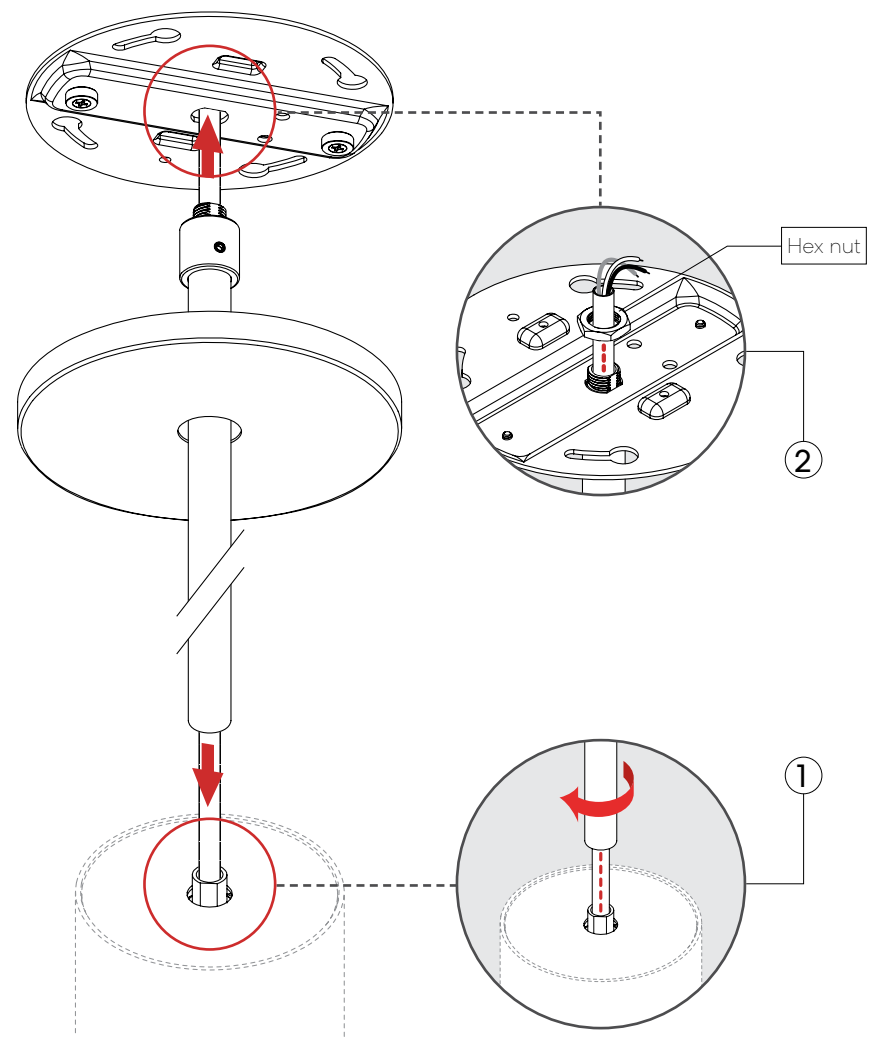


Note: Hold the power cord at the top to prevent it from twisting.

FIELD-CUTTABLE STEM


10 TIGHTEN CABLE HOLDER AND REINSTALL DRIVER. CANOPY DRIVER ONLY

Note: If the driver is in the fixture or remote, skip to step 11.

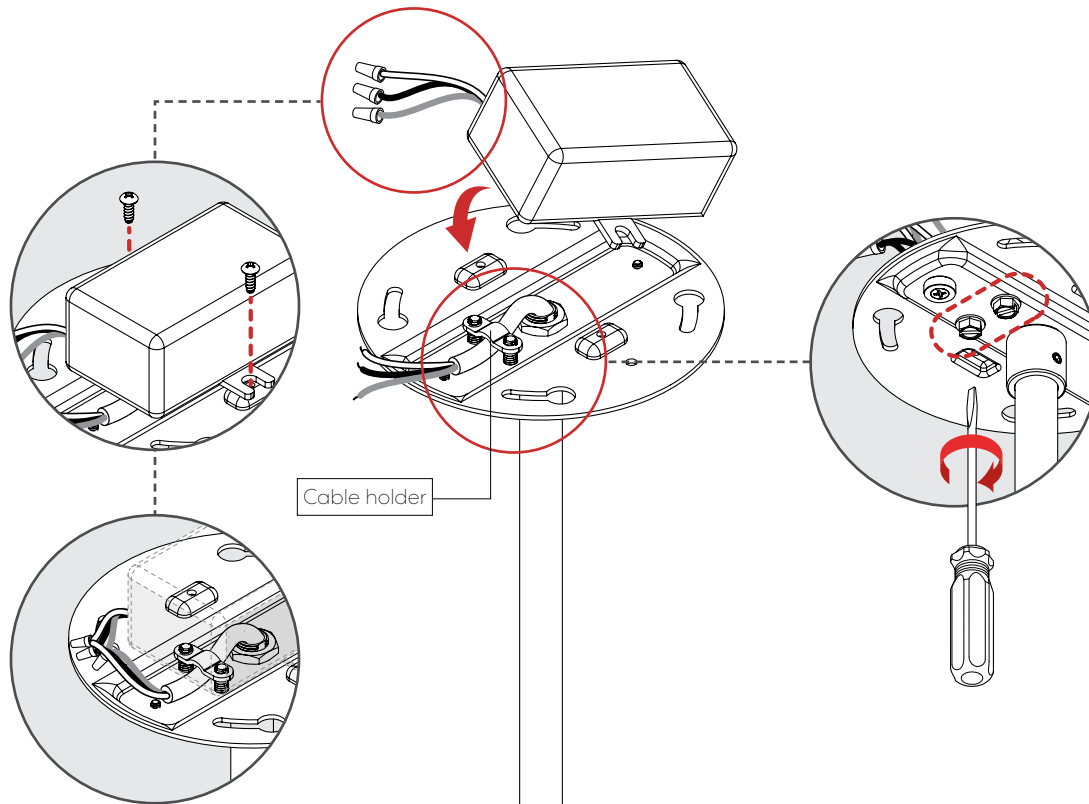

Reconnect wires.


11 MAKE ELECTRICAL CONNECTIONS.

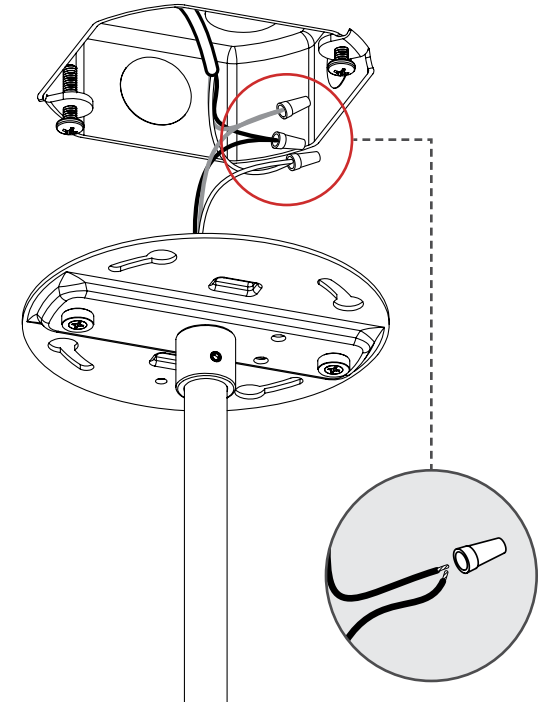

Note: Number of wires may vary.

FIELD-CUTTABLE STEM

12 FIX MOUNTING PLATE.

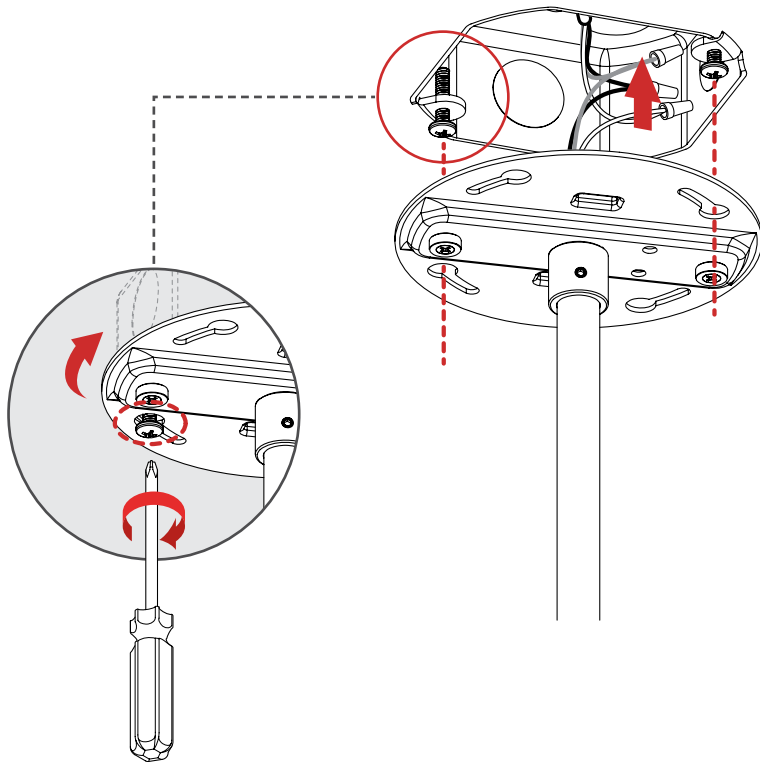

13 MOUNT CANOPY.

