



AERA 2-3-4


Downlights - Recessed Remodel (RM)



 This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.


 Wire dimming conductors as Class 1.

 Shown with 2" round fixed. Applicable to all types, and shapes all sizes.

1 PREPARE CEILING.

REMODEL TYPE NON-IC (RM)


Cut hole opening **[A]** in ceiling, according to shape and dimensions shown in table below.

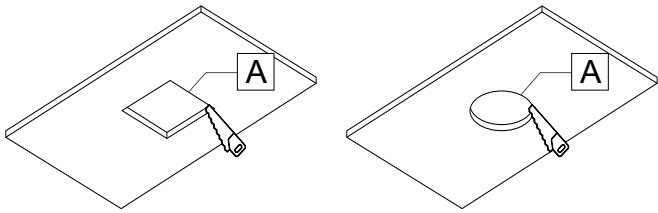

| | 2" | 3" | 4" |
|--------|-----------------|-----------------|-----------------|
| Square | 2 1/2" x 2 1/2" | 3 1/2" x 3 1/2" | 4 1/2" x 4 1/2" |
| Round | Ø 2 1/2" | Ø 3 1/2" | Ø 4 1/2" |

TRIMLESS MUDPLATE

Attach mudplate **[B]** to ceiling and fix with screws **[C]** onto ceiling. Plaster and sand over mudplate **[B]**.

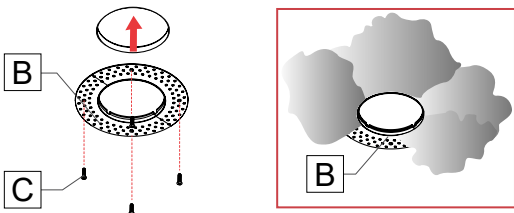


TRIMLESS MILLWORK (TLMW)

Follow the table for dimensions based on size and baffle shape.


Note: The baffle opening is cut-through, but the collar opening is a step-hole that is at the back face of the ceiling.

Mount the millwork adapter **[AA]** from above before fixing the ceiling. Attach the millwork adapter by using the provided set screws **[BB]**. Keep pressure even on all screws to center with cutout.


Note: Millwork adapter **[AA]** must be installed from above the ceiling or before ceiling is installed.

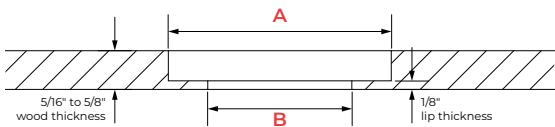

| | A | B |
|-----------|-----------------|-------------------|
| | Collar Opening | Baffle Opening |
| 2" Round | Ø 2 1/2" | Ø 2 1/16" |
| 2" Square | 2 1/2" x 2 1/2" | 2 1/16" x 2 1/16" |
| 3" Round | Ø 3 1/2" | Ø 3 1/16" |
| 3" Square | 3 1/2" x 3 1/2" | 3 1/16" x 3 1/16" |
| 4" Round | Ø 4 1/2" | Ø 4 1/16" |
| 4" Square | 4 1/2" x 4 1/2" | 4 1/16" x 4 1/16" |

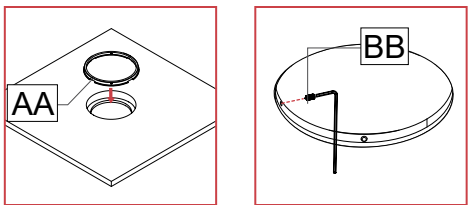

BACK FACE OF CEILING

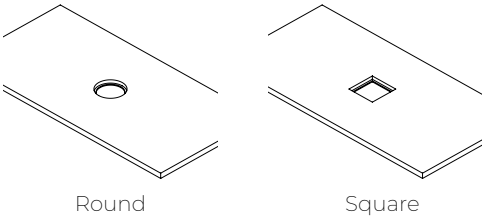


AERA 2-3-4

Downlights - Recessed Remodel (RM)



2 LOWER ARMoured CABLE.




Bring armoured cable [D] from the ceiling opening.



3 MAKE ELECTRICAL CONNECTIONS.

Unfasten screw [E] and pivot the cover [F]. Make electrical connections between armoured cable [D] and driver cables [G] with wire nuts [H].

Reinstall the cover [F] by pivoting it back into place, and tighten the screw [E] to secure the cover [F].

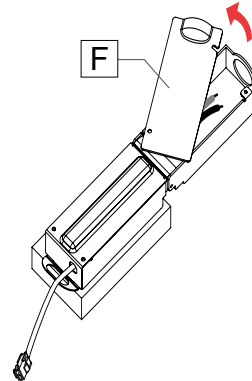


Note: Number of wires may vary.

For electrical connections, please refer to the [wiring diagram guide](#).



4 INSERT DRIVER.

Place the driver [I] into the ceiling.





5 CONNECT LIGHT ELEMENT.



FLANGED TRIM

Bring the light element [J] closer to the ceiling. Connect the light element [J] to driver in ceiling [K] with quick connectors [L].

Attach the safety cable [M] to a suitable point in the ceiling.



Squeeze spring clips [N] upwards onto light element [J]. Insert light element [J] into ceiling [K] until spring clips [N] snap back above the ceiling.





6 INSTALL BAFFLE.

FLANGED TRIM

Snap in baffles [O] in place into ceiling opening until audible click is heard.

Note: Before installing baffle on adjustable models, see pages 4-5 for light element adjustment instructions (if required).



AERA 2-3-4

Downlights - Recessed Remodel (RM)


5 CONNECT LIGHT ELEMENT.

TRIMLESS MUDPLATE

Bring the light element [J] closer to the ceiling. Connect the light element [J] to driver in ceiling [K] with quick connectors [L].

Attach the safety cable [M] to a suitable point in the ceiling.


Insert light element [J] into the ceiling opening [K].

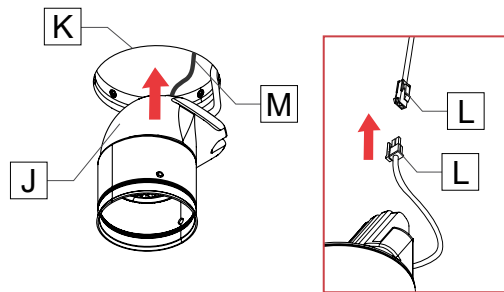


TRIMLESS MILLWORK

Connect the light element [J] to driver in housing with quick connectors [L] and install from below.


Attach the safety cable [M] to a suitable point in the ceiling.

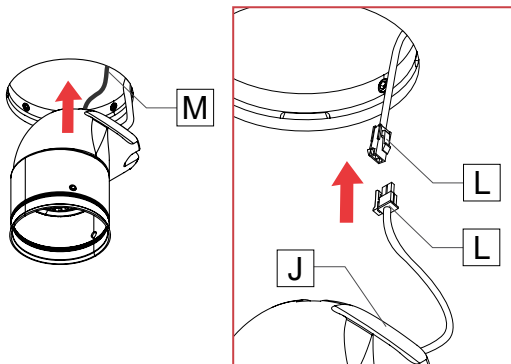

Squeeze spring ring [P] into the mudplate [B] at the edge. Spring ring [P] will snap into the mudplate notches [Q] around the mudplate edge.

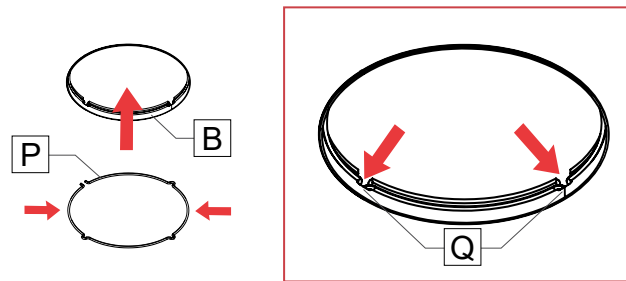

Squeeze spring ring [P] into the millwork adapter [R] to keep the light module in place. Spring ring [P] will snap into the millwork adapter notches [Q] around the millwork adapter edge.

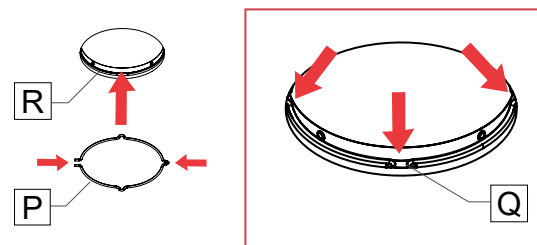


6 INSTALL BAFFLE.

TRIMLESS MUDPLATE

Snap in baffles [O] in place into ceiling opening until audible click is heard.

Note: Before installing baffle on adjustable models, see pages 4-5 for light element adjustment instructions (if required).

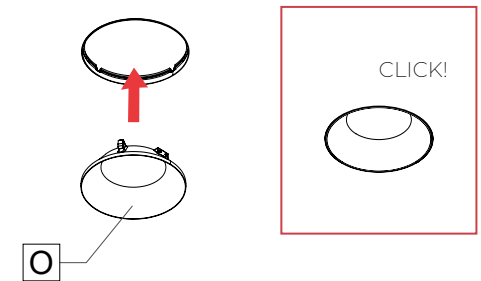


TRIMLESS MILLWORK

Snap in baffles [O] in place into ceiling opening until audible click is heard.

Note: Edge of the trim should be flush with the surface.

Note: Before installing baffle on adjustable models, see pages 4-5 for light element adjustment instructions (if required).

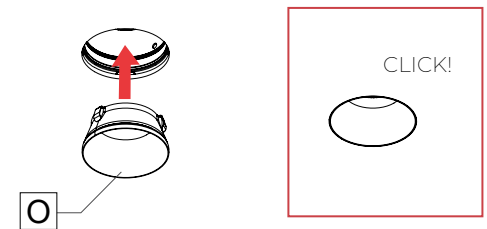

AERA 2-3-4

Downlights - Recessed Remodel (RM)



AERA 2 ADJUSTABLE - LIGHT ELEMENT ADJUSTMENT INSTRUCTIONS




Shown with Aera round adjustable, but applies to Aera square adjustable also.


1 REMOVE BAFFLE.

Remove baffle [O] from ceiling.

FLANGED TRIM




TRIMLESS MUDPLATE




3 ROTATE OPTIC.

Place a flathead screwdriver in the small notch [S] to rotate the optic [T].

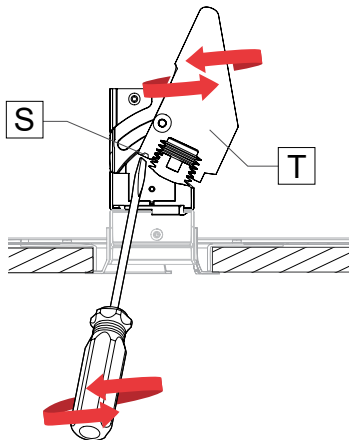

2 TILT OPTIC.


Place a flathead screwdriver in the small notch [S] and tilt the optic [T].

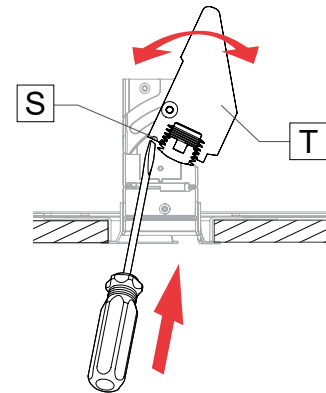


4 REINSTALL BAFFLE.

Snap in baffles [O] in place into ceiling opening until audible click is heard.

FLANGED TRIM



TRIMLESS MUDPLATE



AERA 2-3-4

Downlights - Recessed Remodel (RM)



AERA 3 - 4 ADJUSTABLE - LIGHT ELEMENT ADJUSTMENT INSTRUCTIONS




Shown with Aera round adjustable, but applies to Aera square adjustable also.


1 REMOVE BAFFLE.

Remove baffle [O] from ceiling.

FLANGED TRIM




TRIMLESS MUDPLATE




2 TILT OPTIC.

Push or pull the tab [U] to tilt the optic [T] into position.

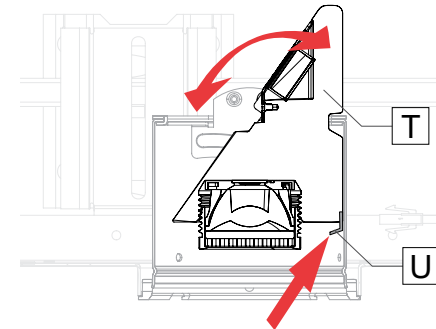

3 ROTATE OPTIC.


Use the tab [U] as leverage to rotate the optic [T].

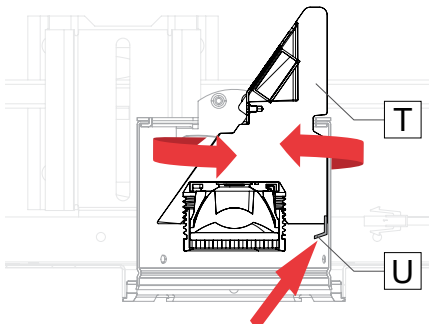

4 REINSTALL BAFFLE.

Snap in baffles [O] in place into ceiling opening until audible click is heard.

FLANGED TRIM



TRIMLESS MUDPLATE

