



**NOTE:** Wire dimming conductors as Class 1

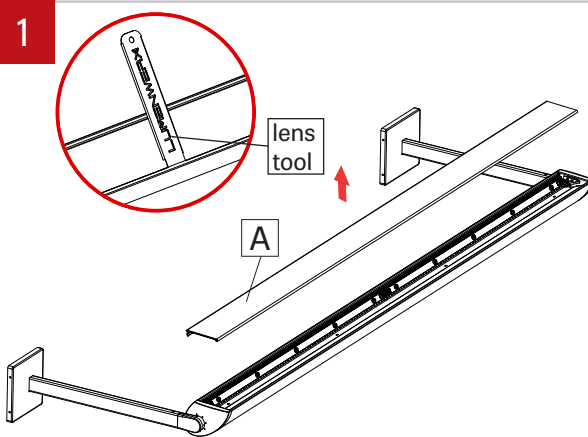


Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure


Make sure to reconnect the wires to the LED boards correctly

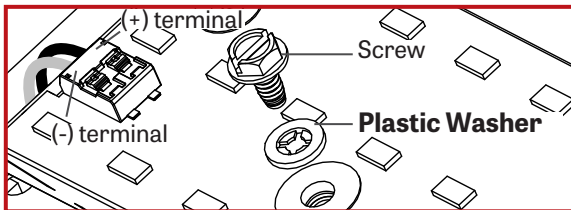


Make sure the power to the fixture is turned off. Remove the lens (A) from the fixture with the included lens tool.

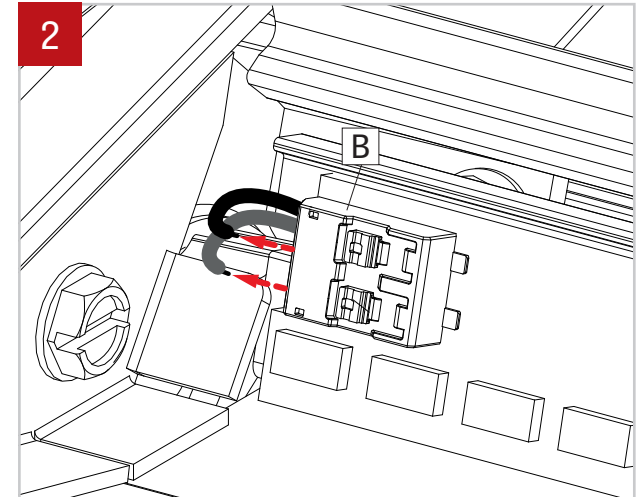


Disconnect LED molex connector (B) by taking a pointed object and pressing on the two tabs on the top.

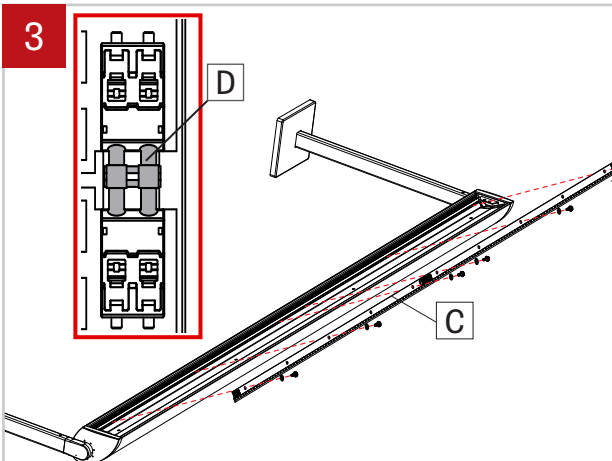

Unscrew the LED boards (C) directly from the fixture and remove them. If need to remove just one board, disconnect the coupler (D) between the two boards connectors after having unscrew the LED board (C).

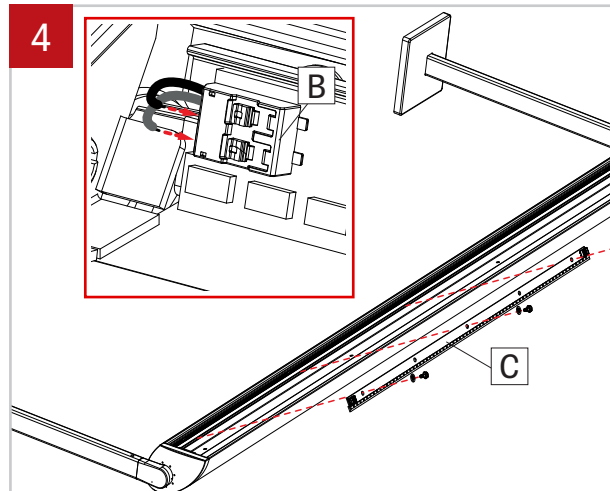


Reinstall the first LED boards (C) by using a screw with washer. Reconnect LED molex connector (B) to the first board.

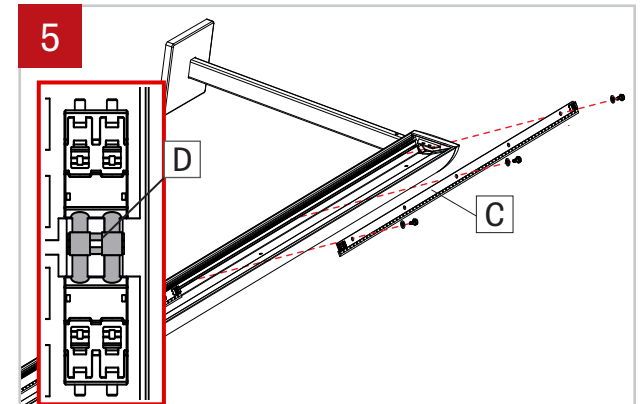

Insert coupler (D) into connector of the first board. Insert coupler (D) into connector of the second board. Screw second LED board (C) to the fixture by using a **screw with plastic washer**. **Do not apply too much pressure**. Make sure that the coupler stays in place in between the two boards.

6

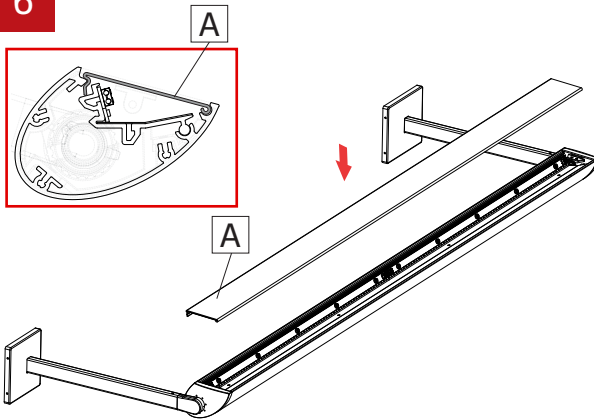

Put back in place the lens (A).