



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

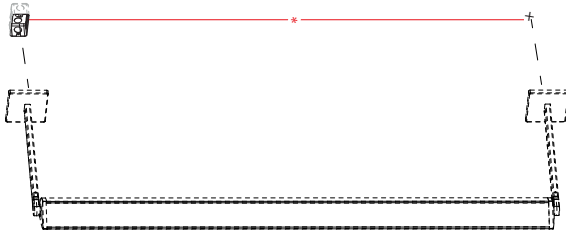

Locate junction box and mounting points on the ceiling, according to the dimensions in the supplied client drawing.


2

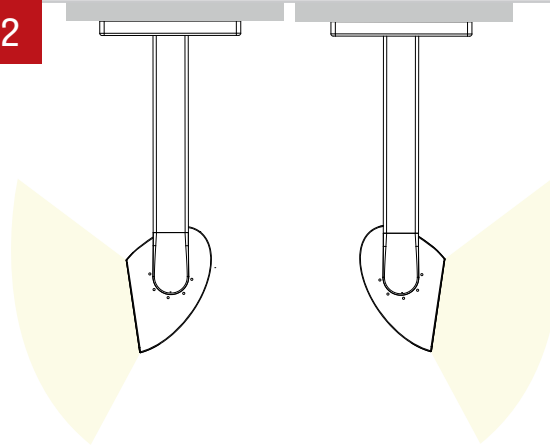

Determine what orientation the fixture should be before attaching the arm to the fixture.


3

POWER SIDE

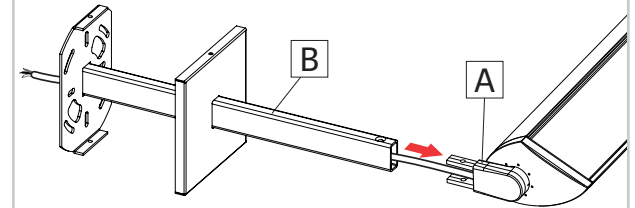


Make sure that the power cable coming from the fixture's end cap (A) is passing through the fixture's arm (B). Install the fixture's arm (B) on the end cap (A).

4 NON-POWER SIDE

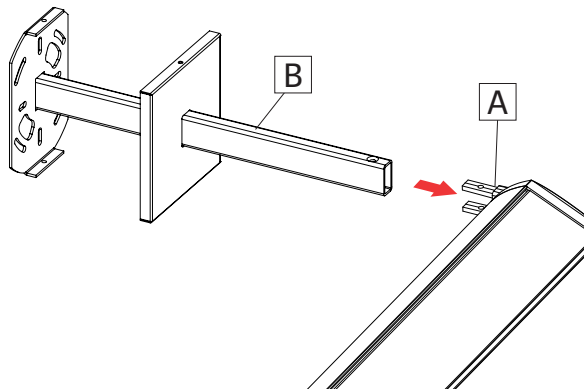


Install the fixture's arm (B) on the end cap (A).

5

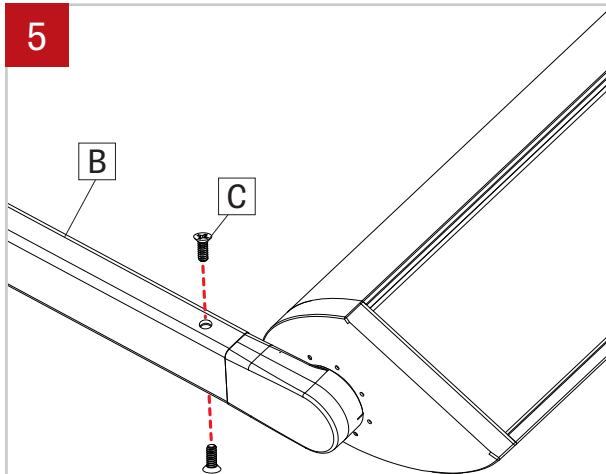


Secure the fixture's arm (B) with provided screws (C). Repeat on both sides.

6

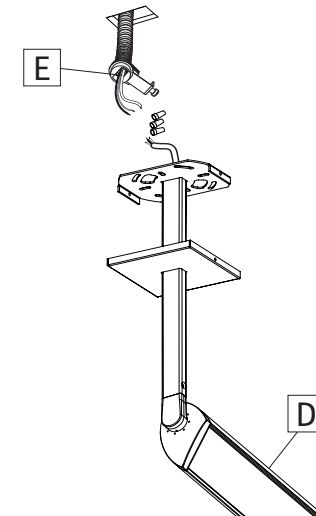


Make electrical connexion between fixture (D) and main power (E) (connect the same color wires together).

7

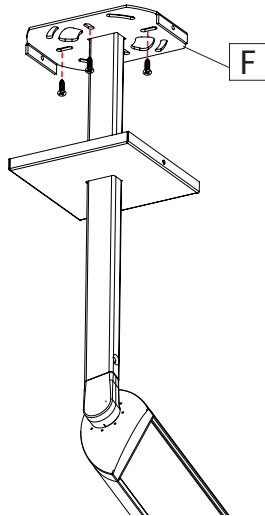

Screw the arm mounting plate (F) directly to the ceiling, using drywall screw (by others); and drywall anchors (by others) when needed.


8

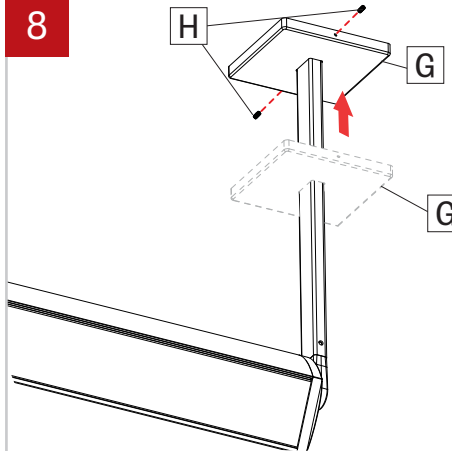

Push the cover plate (G) to the fixture's arm mounting plate and fix it using set screws (H) (6/32 Allen key needed). The set screws (H) should be flush with the cover plates (G). Repeat on both sides.


9

CONTINUOUS SYSTEM

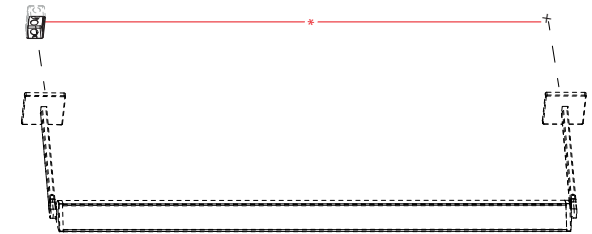


Locate junction box and mounting points on the wall, according to the dimensions in the supplied client drawing. Determine what orientation the fixture should be before attaching the arm to the fixture, as shown in step 2.

10

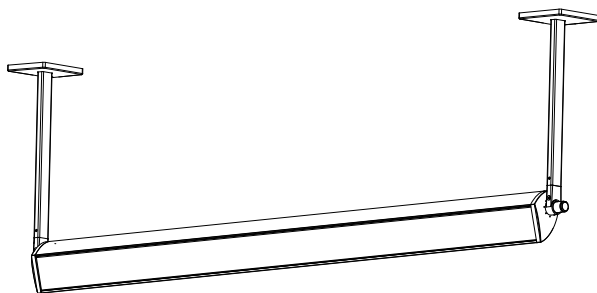


Install the first fixture as shown in steps 3 to 8.

11

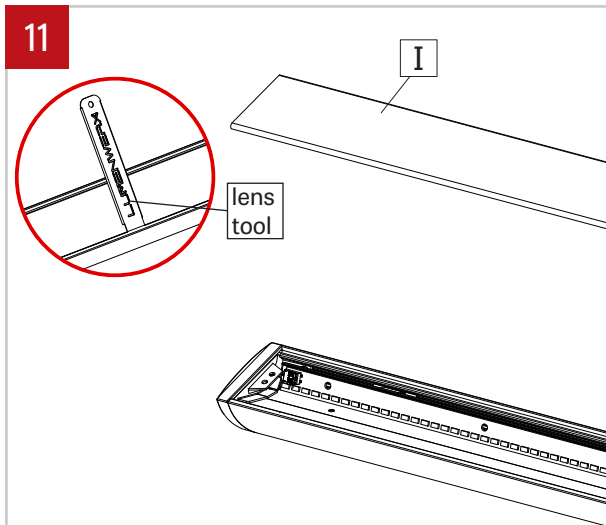


Remove the lens (I) from the second fixture with the included lens tool.

12

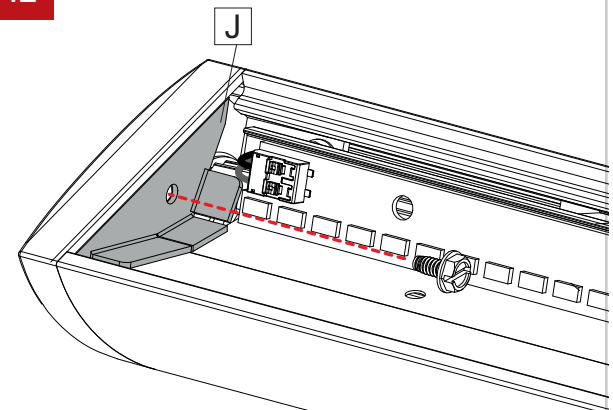


Unscrew and remove the end cap covers (J) on both sides of the second fixture. Place them in a safe place.

13

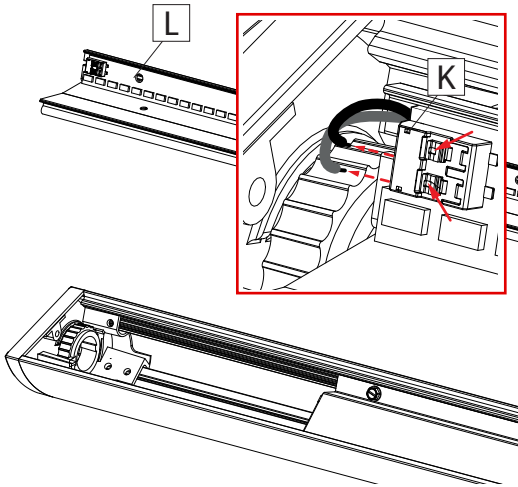


Disconnect LED mox connectors (K) by taking a pointed object and pressing on the two tabs on the top. Then remove the reflector (L) from the fixture and place it in a safe place.

14

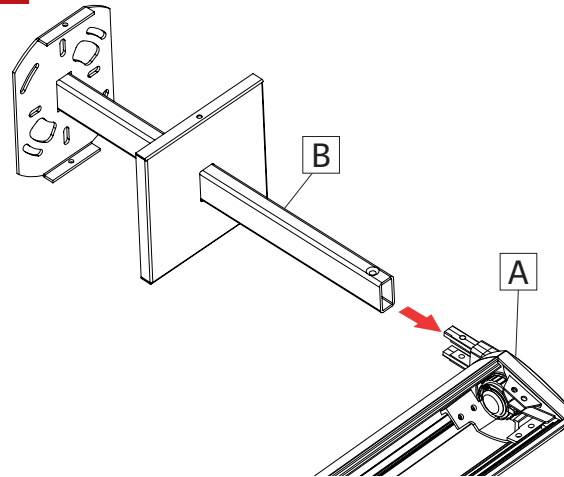


Install the second fixture's arm (B) on the end cap (A).

15

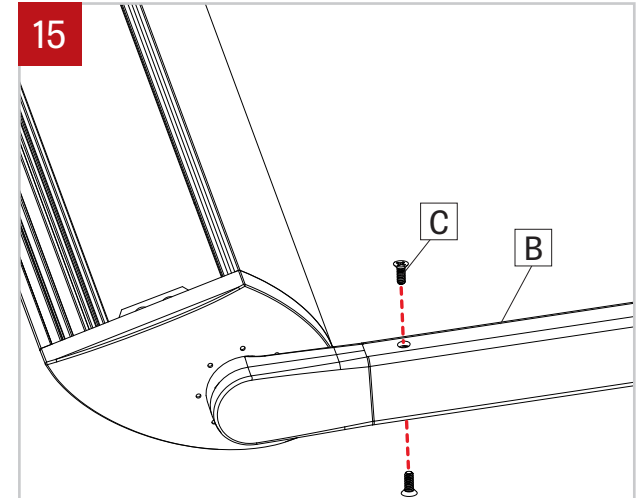


Secure the second fixture's arm (B) with provided screws (C).

16

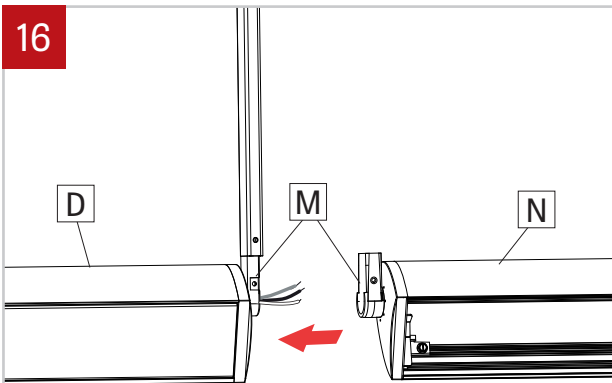


Pass the wires from the first fixture inside the second fixture. Align the joiners (M) at the end of the first two fixtures (D) and (N) and connect them.

17

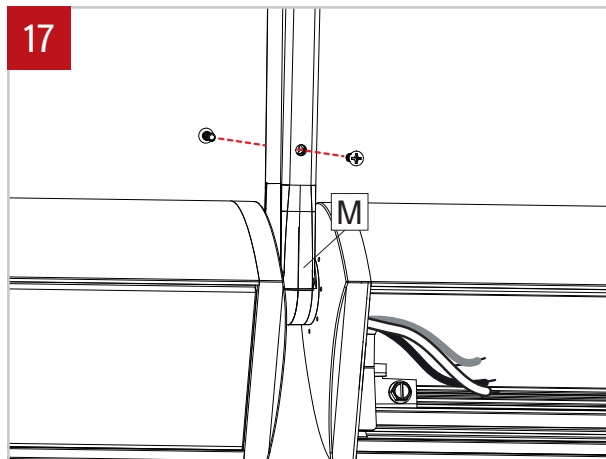

Connect joiners (M) together using provided screws.

18

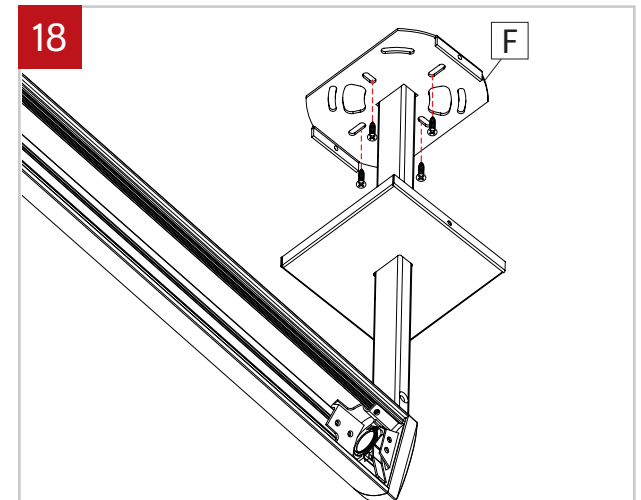

Screw the arm mounting plate (F) directly to the ceiling, using drywall screws (by others); and drywall anchors (by others) when needed.

