



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

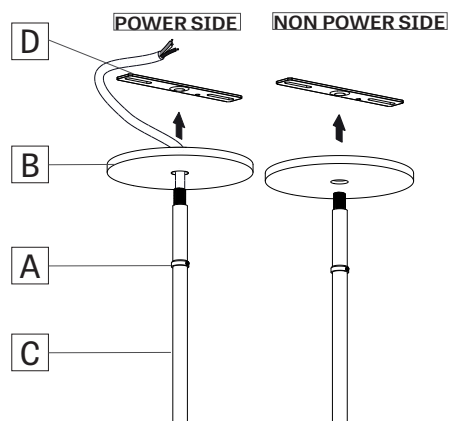


Make sure that the power to the fixture is turned off. Slide the slip ring (A) and the canopy (B) onto the stem (C) and leave some space. Screw the junction box crossbar (D) onto the stem (C).

2 FOR EMERGENCY CIRCUIT

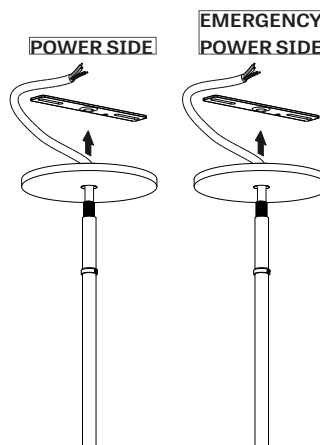


In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

3 FOR FIXTURE IN GRID CEILING

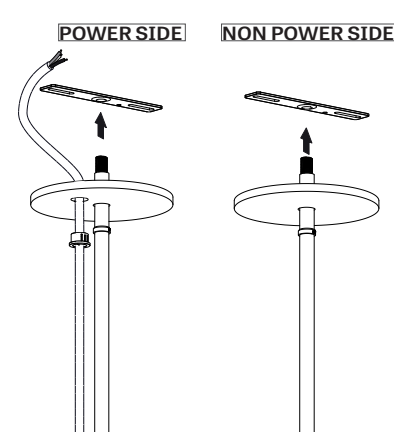


In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.

4

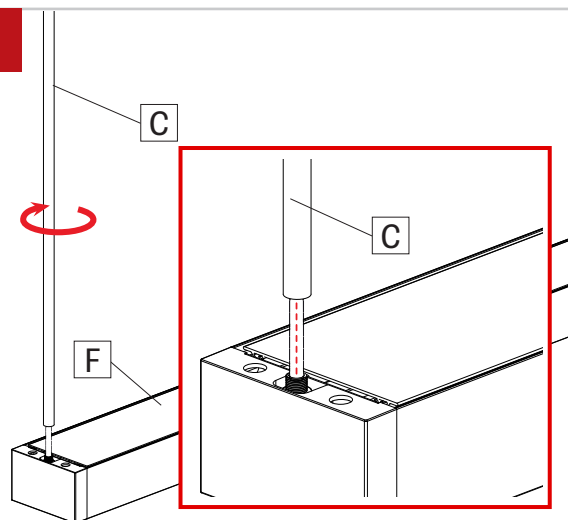


Screw the stems (C) onto the nipple at the ends of the fixture (F).

5 POWER SIDE

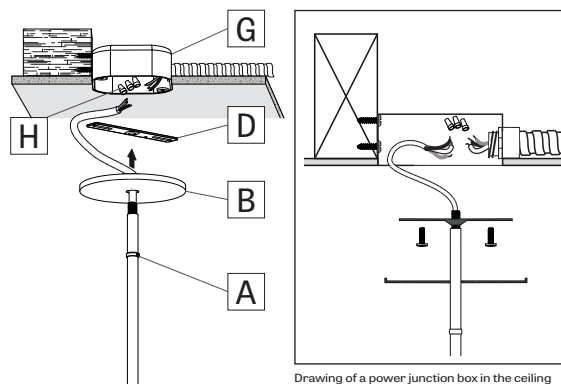


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Make wire connection with wire connectors (H). Then slide the canopy (B) and tighten the set up with the slip ring (A).

6 NON-POWER SIDE

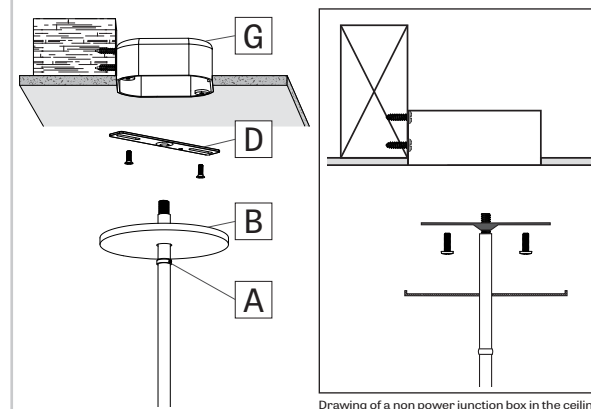


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Then slide the canopy (B) and tighten the set up with the slip ring (A).

7 CONTINUOUS SYSTEM

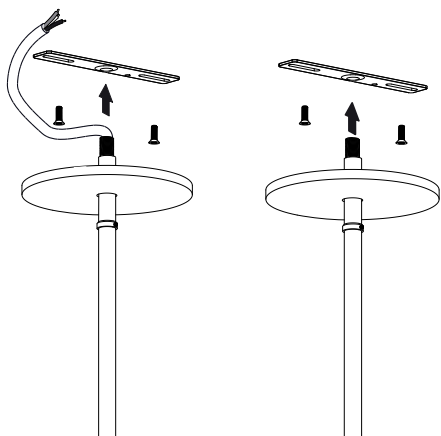


For a continuous system, repeat step 1 to 3 for all mounting hardware.

8

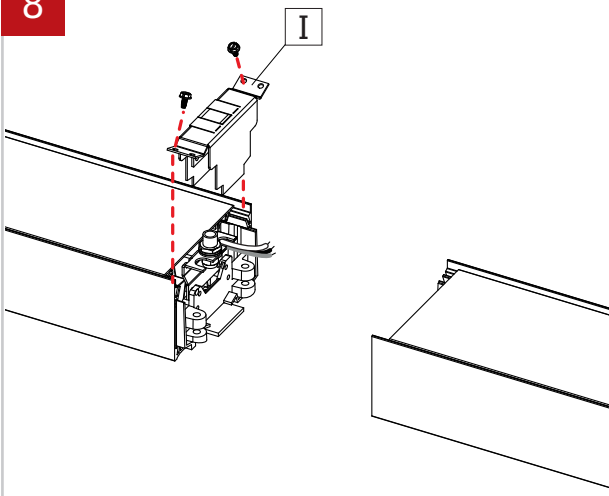


Unscrew and remove the top cap (I). Place it in a safe place.

9

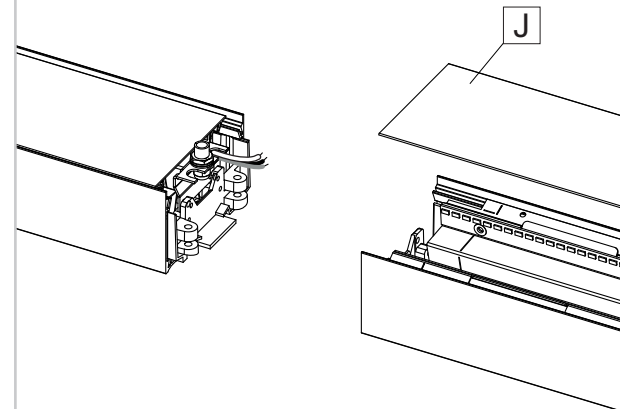


Remove dust covers (J) on the second fixture on the power side. Repeat for all fixture in the run.

10

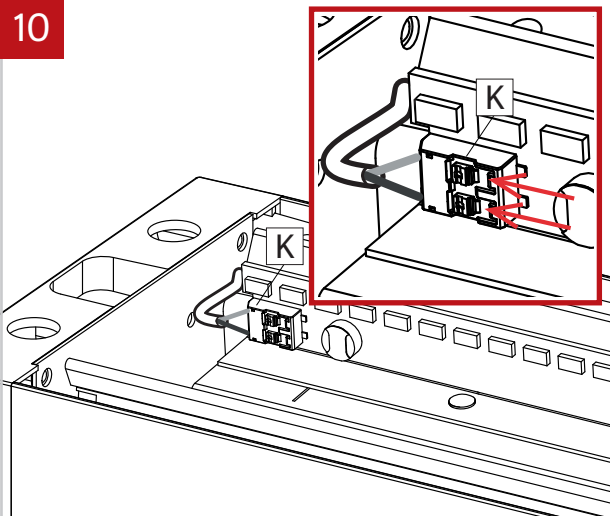


Disconnect LED mox connectors (K) by taking a pointed object and pressing on the two tabs on the top.

11

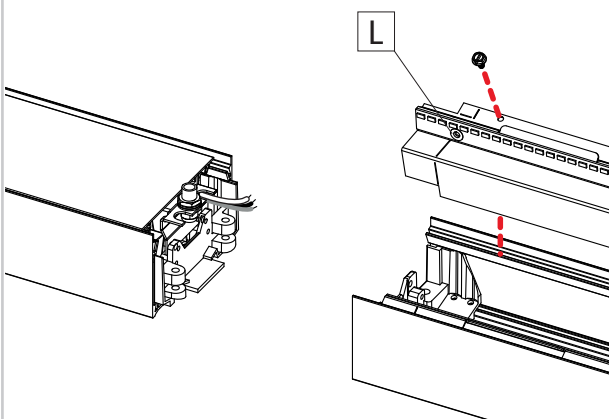


Unscrew the side reflectors (L) on the second fixture on the power side and remove them from the fixtures. Place the side reflectors (L) in a safe place. Repeat for all fixtures in the run.

12

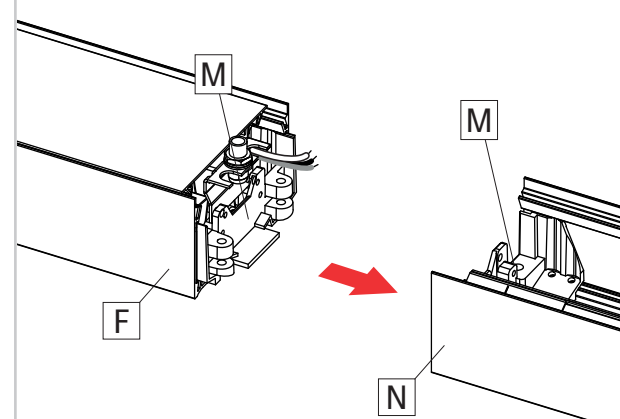


Pass the wires from the first fixture inside the second fixture. Align the joiners (M) of the two fixtures in the run (F) and (N) and connect them.

13

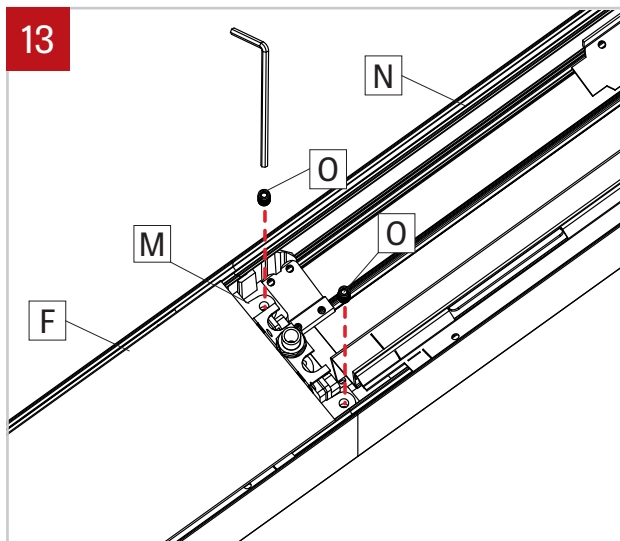


Secure the two fixtures (F) and (N) by fastening set screws (O) on the joiners (M).

14

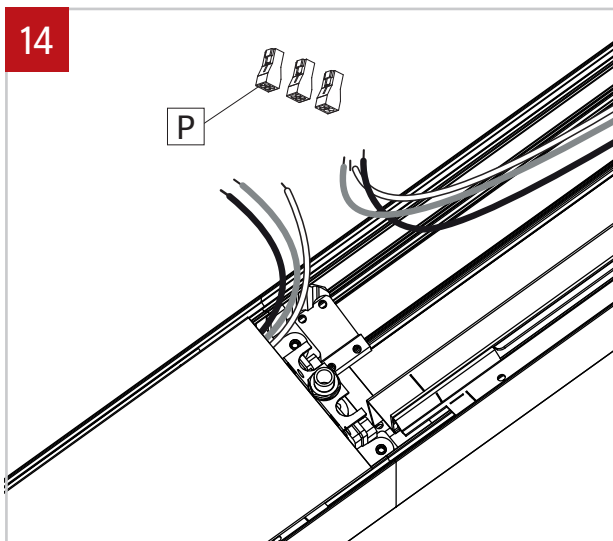


Connect wires between joining fixtures using quick connectors (P).

15

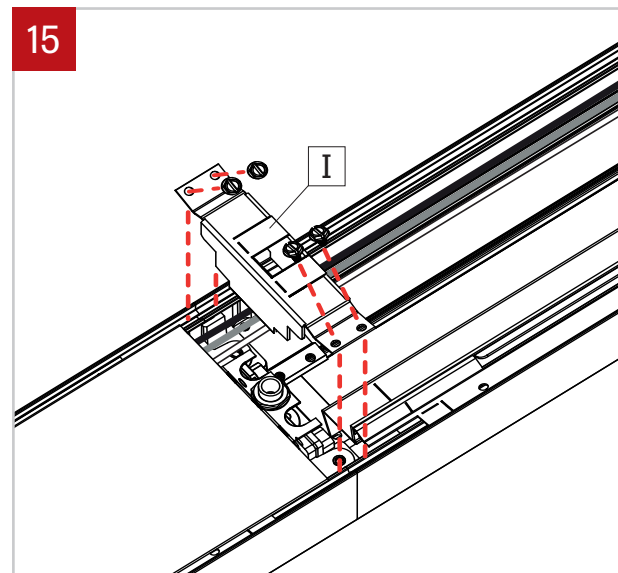


Install the top cap (P) on top of the joiners.

16

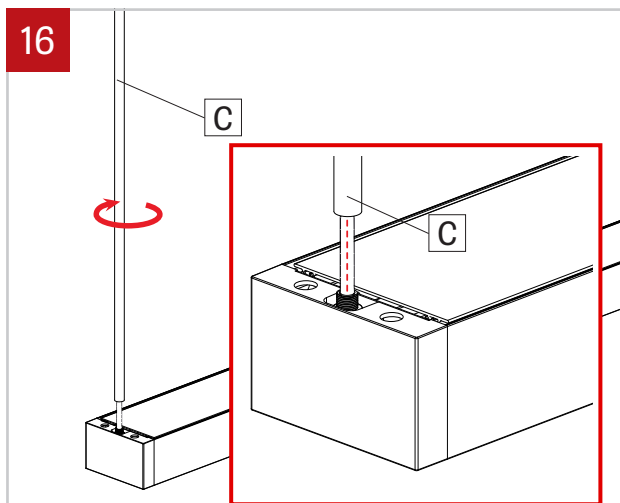


Screw the stems (C) onto the end nipples of the two fixtures in the run and on the joiner.

17

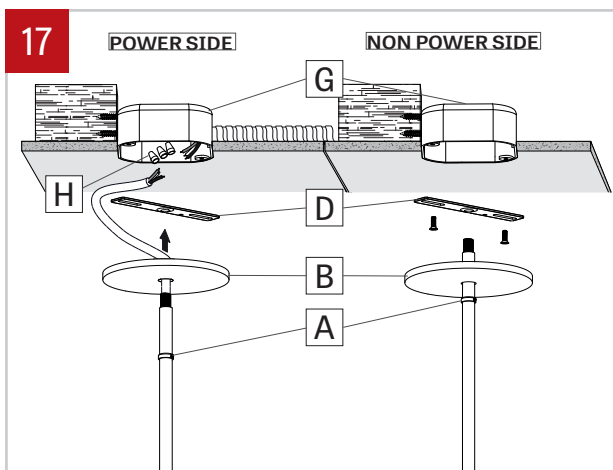

Raise the fixtures and tighten the junction box crossbars (D) with screws (H) to the junction boxes (G). Make wire connection on the power side with wire connectors (H). Then slide the canopies (B) and tighten the sets up with the slip rings (A).

18

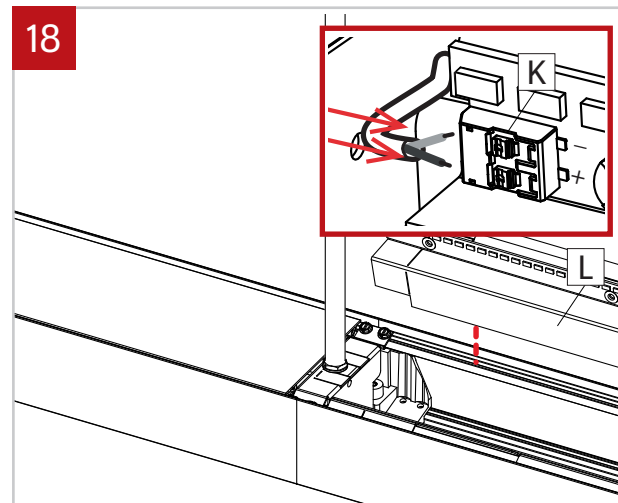

Reconnect LED mox connectors (J) to the side reflectors (K). Reinstall the side reflectors (K).

19

